



origin

DOORS AND WINDOWS

# Artisan Slider (OS-20) Specification Guide

A close-up photograph of a dark-colored door handle and keyhole. The handle is a vertical slider style, and the keyhole is located below it. The background is a light, neutral color, and the door frame is visible on the left and right sides.


# Contents

Specification Overview	03
Security	06
Optional Extras	07
Glass Options	09
Artisan Slider Make-Up	11
Size Limitations	12
Performance and Limitations	13
Master Configurations	17
Technical Drawings	26
Handles	54
Gaskets	55
Installation Guide	56
Accreditations	89

# Specification Overview

## Thermally Broken Aluminium Artisan Slider

External  
view of  
the Origin  
Artisan Slider

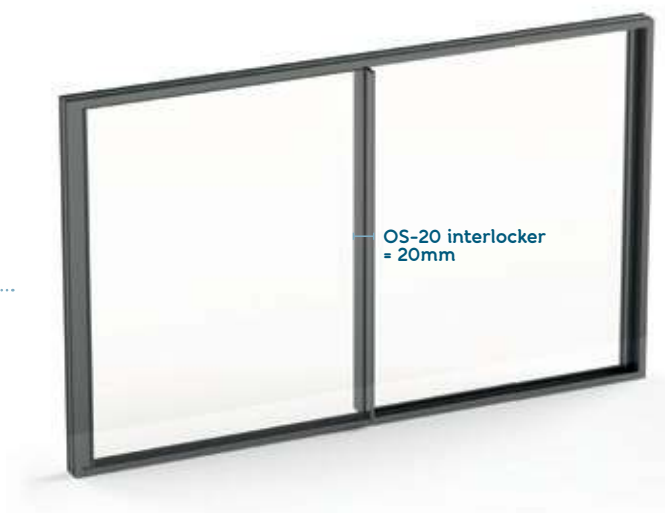

Internal view  
of the Origin  
Artisan Slider



## Profile specification

Frame Depth	2 options: 116mm (double track) and 182mm (triple track)
Sightline	20mm interlockers and 159mm central locking stiles if used.
Track Height	44mm (double and triple track)
Minimum Sash Size	550mm wide x 1600mm tall
Maximum Sash Size	2200mm wide x 3000mm tall <sup>1</sup> <i>individual panels cannot exceed 6sqm</i>
Maximum Sash Weight	200kg

## Features

- ▶ Up to a 10-year guarantee including gaskets and seals<sup>2</sup>
- ▶ Up to a 5-year guarantee on glass<sup>2</sup>
- ▶ Concealed running gear and track
- ▶ Minimum of 6 points of locking (internal lever and cylinder only)
- ▶ Weather testing BS 6375 part 1 certified
- ▶ Structurally bonded system

## Glass Options

- ▶ Toughened Glass
- ▶ Laminated Glass
- ▶ Solar Reflective Glass

See page 9 for full benefits of each glass type

## Options and extras

- ▶ Up to 6 panelled configurations - these can be all sliding or a combination of fixed and sliding
- ▶ 180mm and 225mm cill options available
- ▶ 60mm drip bar option
- ▶ Available in over 150 RAL shades including Anodised Silver
- ▶ Flush faced handle option available in five colours
- ▶ 35mm frame extender
- ▶ 2500EA, 4000EA and 5000EA trickle vents available

<sup>1</sup> - The height of an individual panel cannot exceed 3 times its width

<sup>2</sup> - Guarantee based on location of where the doors will be installed.


Full terms and conditions can be found on the Origin website - [origin-global.com/terms-and-conditions](http://origin-global.com/terms-and-conditions).

## Specification Overview

The Origin Artisan Slider has 2 popular colours. These are available in as little as 4 weeks.



Anthracite Grey (7016M)



Anodised Silver



Covering everything from the favourite metallic shades through to the more extensive palettes, we've got a colour available that's guaranteed to suit any home or building style

For the full range of colours and most up to date lead times, visit [origin-global.com](http://origin-global.com)

### Lead Times

Popular colour OS-20: 4-weeks

Special colour OS-20: 4-weeks

Anodised Silver: 6-weeks

*Dual colour and woodgrain options are not available.*

## Drainage cap colours

Popular Colour	Drainage Cap Colour	X3 Code
9007M (Dark Silver Metallic)	No. 38 Grey	C01349
7021M (Black Grey)	Dark Grey	C01350
9005M (Jet Black)	Black	C01163
7015M (Slate Grey)	Dark Grey	C01350
9910G (Hipca White)	White	C01353
7016M (Anthracite Grey)	Dark Grey	C01350

# Security

## Origin's Multi-Point Lock

Each door is equipped with an ultra-secure multi-point locking system, which features a minimum of six points of locking. Depending on the size of the door, this may increase.



# Optional Extras

## Trickle Vents

Trickle vents have to meet the minimum air flow rates as defined in the British Building Regulations (see specifics below).

Should it be required, our Artisan Sliders can be specified with discreetly designed trickle vents which are installed through the frame extender for additional ventilation, ensuring the doors meet and surpass building regulations.



*Trickle vents on our Artisan Sliders can only be fitted through the frame extender.*

See OSS for more details

## Handles

- ▶ Every Artisan Slider is fitted with a flush-faced lever handle, which offers a look as sleek as the doors themselves.
- ▶ It's available in five attractive colours: 7015M, 7016M, 9005M, 9910G and Light Silver



See p53 for more details on our handles.

## Frame Extender

A 35mm frame extender is available. This allows for thicker plaster lines on ceilings and offers more room that will allow trickle vents to be fitted.

## Cills

Choose from our 2 cill options. These can also be powder-coated to match the doors.



180mm cill



225mm cill

## Drip Bar

A drip bar option is available. It is situated towards the bottom of the door to deflect rainwater and prevent large pools of water from gathering.





# OS-20 Glass Options

The Origin OS-20 Artisan Sliding Door system differs from similar systems available on the market. From the superior engineering, vast door sizes and quality of manufacture, it's designed to stand out. And the same can be said for the calibre of glass that we use.

The OS-20 comes as a bonded system, and we are proud to use Guardian Glass; a brand renowned for high quality, which not only boasts great thermal performance, but also has a proven track record that's been preferred by some of the world's top architects and specifiers. Guardian Glass is used in iconic commercial grade architectural buildings around the world, and we're now bringing those same demanding quality standards to your home. Operating on five continents and employing over 18,000 people, we have partnered with a manufacturer who is not only an expert, but at the forefront of glass technology and sustainability.

Like Origin, Guardian Glass have developed a world-class quality management system that demonstrates how each level of their organisation manages, performs and verifies the quality of their work and the glass they produce. Our system ensures everyone is informed and accountable, and that you receive products that meet your expectations.

## What glass options does Origin offer on the OS-20?

The OS-20 has 3 types of glass available:

- ▶ Toughened Glass
- ▶ Laminated Glass
- ▶ Solar Reflective



## Toughened Laminated Glass

The toughened glass option is tempered at a high heat and then rapidly cooled under jets of cold air to create a smooth finish that is extremely strong and resistant to scratches. Toughened glass is a cost-effective option for providing a high-performance glazed unit that's capable of withstanding extreme conditions as well as the day-to-day knocks and scuffs of a lively home environment.


## Laminated Glass

For the laminated glass option, low-E glass is used, which consists of two sheets of glass that are pressed together with an extremely tough PVB plastic interlayer. The glass is created using the most advanced magnetron glass coating technology. The low-E coating reflects infrared light, keeping the house warmer in winter and cooler in summer. The neutral colour of the glass and the high light transmission provides a pleasant indoor environment with natural daylight, while the increased insulation provides a higher internal glass surface temperature, reducing the occurrence of condensation and uncomfortable cold spots.

## SunGuard Solar Reflective Glass

With an impressive natural external appearance, our solar reflective glass transmits 70% of light into a property whilst protecting it from overheating or cooling. Not only does the coating on this glass minimise the need for artificial light, but it also offers excellent solar protection with a 37% solar factor. Our solar reflective glass solution is also toughened, giving you confidence in a product that is manufactured to extract maximum lifetime value.

# Artisan Slider Make-Up

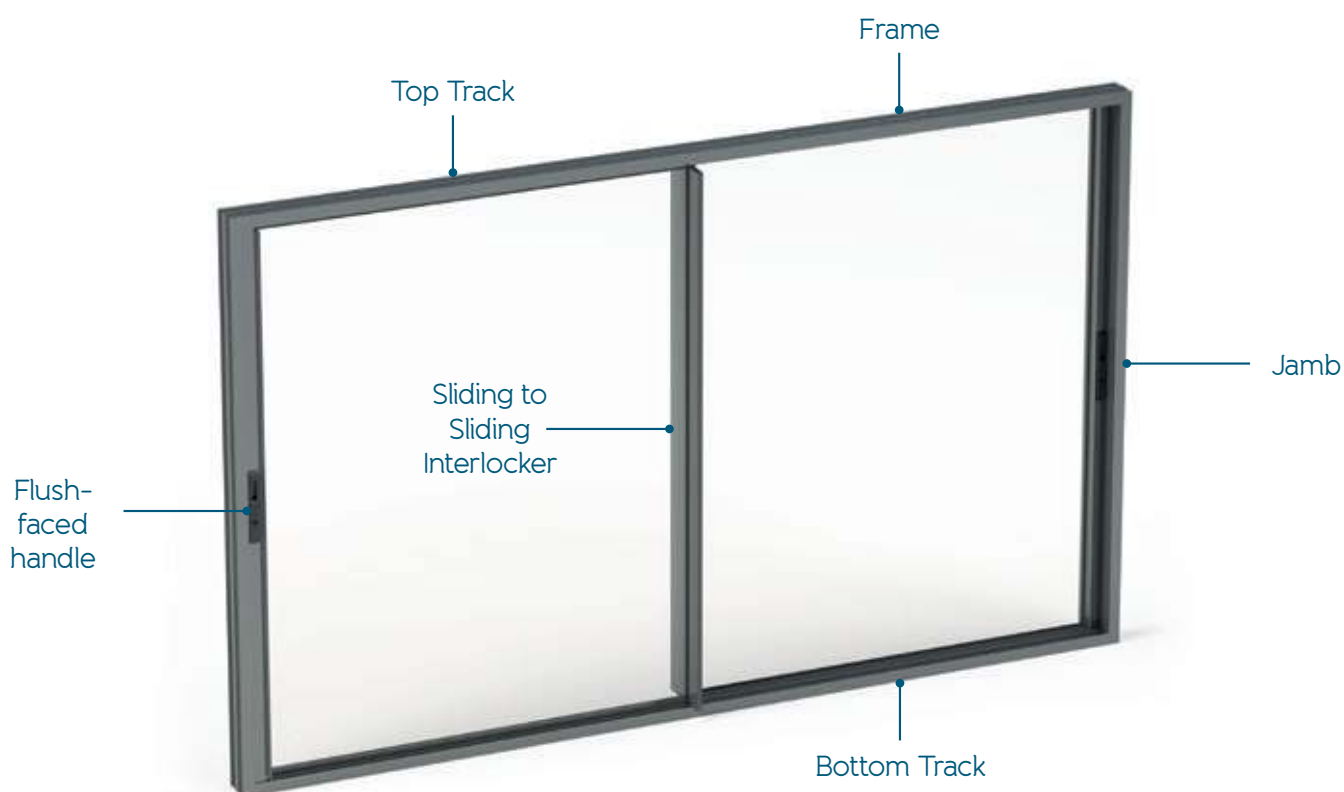

Make-up is dependent on the configuration chosen.

# Size Limitations

## Slider Set Limits

Slider Size	Minimum			Maximum		
	OS-29 / OS-44	OS-77	OS-20	OS-29	OS-44/ OS-77	OS-20
XO or OX (1 Sliding, 1 Fixed) Width (mm)	1463	1462	1228	4052	4010	4428
XX (2 Sliding) Width (mm)	1463	1462	1278	4052	4010	4478
XXO or OXX (2 Sliding, 1 Fixed) Width (mm)	2102	2117	1774	6002	5939	6574
XXX (3 Sliding) Width (mm)	2102	2117	1824	6002	5939	6624
OXXO (2 Sliding, 2 Fixed) Width (mm)	2850	2848	2405	8028	7944	8804
XXXX (4 Sliding) Width (mm)	N/A	N/A	2505	N/A	N/A	8904
OXXXXO (4 Sliding, 2 Fixed) Width (mm)	4129	4159	3497	11929	11803	13096
XXXXXX (6 Sliding) Width (mm)	N/A	N/A	3597	N/A	N/A	13196
All Configs Height (mm)	2005	2005	1600	2600	2600	3000
Sash Width (mm)	710	710	550	2000	2000	2200
Sash Height (mm)	1925	1925	1600	2520	2520	3000
Sash Area (sqm)	N/A	N/A	N/A	6	6	6.6
Sash Width / Height Ratio	N/A	N/A	N/A	1:3	1:3	1:3
Sash Weight (kg)	N/A	N/A	N/A	200	200	200
Sashes in one set	1			6		

# Performance and Limitations

## Origin Thermal Ratings

U-Value

1.4 W/m<sup>2</sup>K

## Glazing Specifications

U-Value

30mm, 1.0 centre pane ●

● Argon Gas Fill

1.4 W/m<sup>2</sup>K ●

## Weather Rating

Air Permeability Class 4

Resistance to Wind Load Class A3

Water Tightness Class 7A

## Performance Testing

BS 6375 Parts 1, 2 and 3 Certified

CE marked for domestic and commercial use

## Building Regulation Requirements

New Build

Limiting Value 1.6 W/m<sup>2</sup>K

Replacements 1.4 W/m<sup>2</sup>K

Energy Rating C or better

All doors must conform to these requirements

## Glass Specification

OS-20 Glass Options				Inner			Spacer		Outer		
Option	Supplier Spec	Max Pane Size (sqm)	Unit Thickness	Low E	Toughened	Solar Reflective	Width mm	Warm Edge Thermobar	Low E	Toughened	Solar Reflective
Standard 6 - 18 - 6	Clear   18mm Thermobar   Low E   Toughened	4	30mm	✓	✓	✗	18	✓	✗	✓	✗
Standard 8 - 14 - 8	Clear   14mm Thermobar   Low E   Toughened	6	30mm	✓	✓	✗	14	✓	✗	✓	✗
Solar Reflective 6 - 18 - 6	6mm Sungard SN70/37   18mm Thermobar   Clear   Toughened	4	30mm	✗	✓	✗	18	✓	✓	✓	✓
Solar Reflective 8 - 14 - 8	8mm Sungard SN70/37   14mm Thermobar   Clear   Toughened	6	30mm	✗	✓	✗	14	✓	✓	✓	✓
Laminated 6.8 - 16 - 6	6.8mm Laminated   16mm Thermobar   Low E Toughened	4	28.8mm	✓	✓	✗	16	✓	✗	✗	✗
Laminated 8.8 - 12 - 8	8mm Laminated   12mm Thermobar   Low E Toughened	6	28.8mm	✓	✓	✗	12	✓	✗	✗	✗

OS-20

# Certificate of thermal simulation

PRODUCT:	Inline Slider
SIM - SOFTWARE:	Physibel Building Physics Software - BISCO 2D
GLASS SPECIFICATION AND CENTRE PANE U/VALUE VALUE:	1.0 W/m <sup>2</sup> K (30mm double glazing)

Thermal Transmittance: (U-Value)  
1.4 W/(m<sup>2</sup>K)

*All thermal simulations carried out in accordance with: BS EN ISO 10077-2:2017, Thermal Performance of windows, doors and shutters - calculation of thermal transmittance.*

TESTED BY: David Ginger (Product Compliance Director)  
DATE: May 2022  
SIGNED: 

All simulations strictly in accordance with the requirements of ISO 10077-2:2015

Email: [enquiry@origin-global.com](mailto:enquiry@origin-global.com) | Web: [www.origin-global.com](http://www.origin-global.com)  
Origin Global HQ, Stuart House, Castle Estate, Coronation Road, Cressex Business Park, High Wycombe, Buckinghamshire, HP12 3TA

OFDLJ8149.3





## CE DECLARATION OF PERFORMANCE

Origin Frames Ltd, Stuart House, Castle Estate, Coronation Road  
Cressex Business Park, High Wycombe, Buckinghamshire,  
HP12 3TA, United Kingdom

This document declares that the product:

Origin OS-20 Artisan Sliding Door  
External pedestrian door set intended to be used in domestic and  
commercial buildings conforms to the product requirements  
of BS EN 14351-1:2006+A2:2016 Annex ZA

Essential Characteristics	Performance	Test Standards
Resistance to wind load	<i>Class C5</i>	BS EN 12211
Air permeability	<i>Class 4</i>	BS EN 1026
Water tightness	<i>Class 7A</i>	BS EN 1027
Impact resistance	<i>Npd</i>	BS EN 13049
Thermal transmittance	<i>See File</i>	EN ISO 10077-1 & EN ISO 10077-2 (or EN ISO 12567-1 and prEN 12567-2)
Dangerous substances	<i>See File</i>	BS EN 14351-1: 2006+A1:2010
Load-bearing capacity of safety devices	<i>N/A</i>	BS EN 948
Acoustic performance	<i>Npd</i>	BS EN ISO 140-3
Radiation properties	<i>Npd</i>	EN 410
Ability to release	<i>Npd</i>	BS EN 179 and BS EN 1125

This declaration of performance is issued under  
the sole responsibility of Origin Frames Ltd.

Signed on behalf of Origin Frames Ltd:

David Ginger – Product Compliance Director  
Date: 01/07/2019


**origin**  
DOORS AND WINDOWS

OFDL\_18.120.1





# Master Configurations



XO (1 fixed, 1 sliding) or XX (2 sliding)

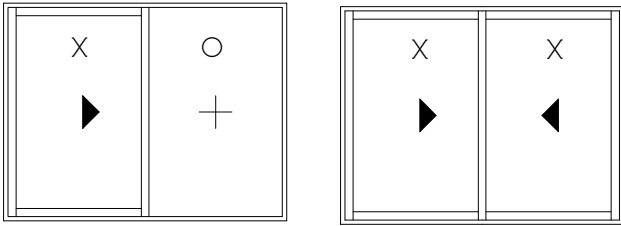



OXX (1 fixed, 2 sliding) or XXX (3 sliding)

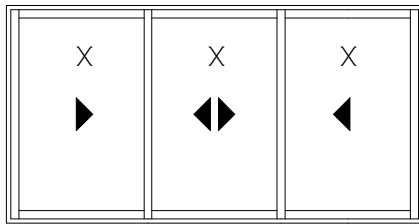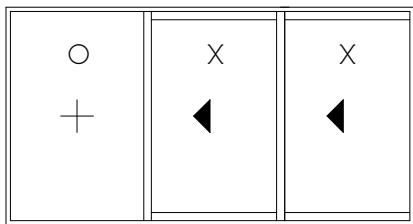

OXXXXO (2 fixed, 2 sliding) or XXXX (4 sliding)

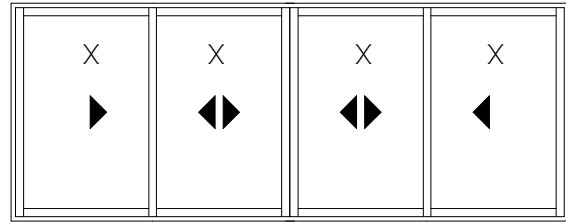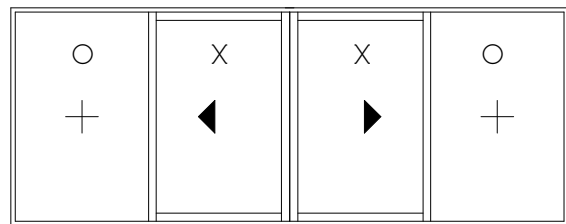

OXXXXO (2 fixed, 4 sliding) or XXXXXX (6 sliding)

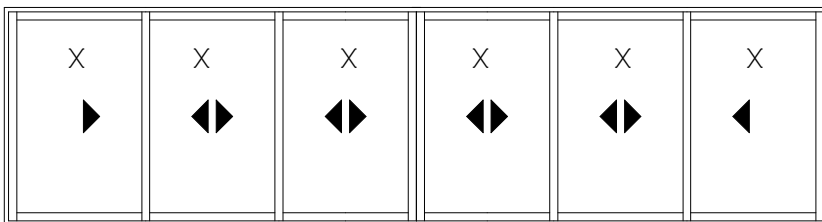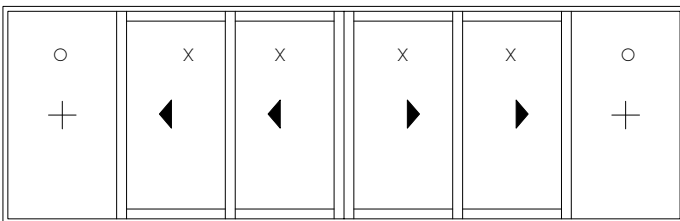


## KEY

- O - Indicates Fixed sash
- X - Indicates Opening sash
- ◄► - Indicates opening direction

Master Configuration: XO (1 sliding, 1 fixed) or XX (2 sliding)

See Configuration Key for section detail ▶

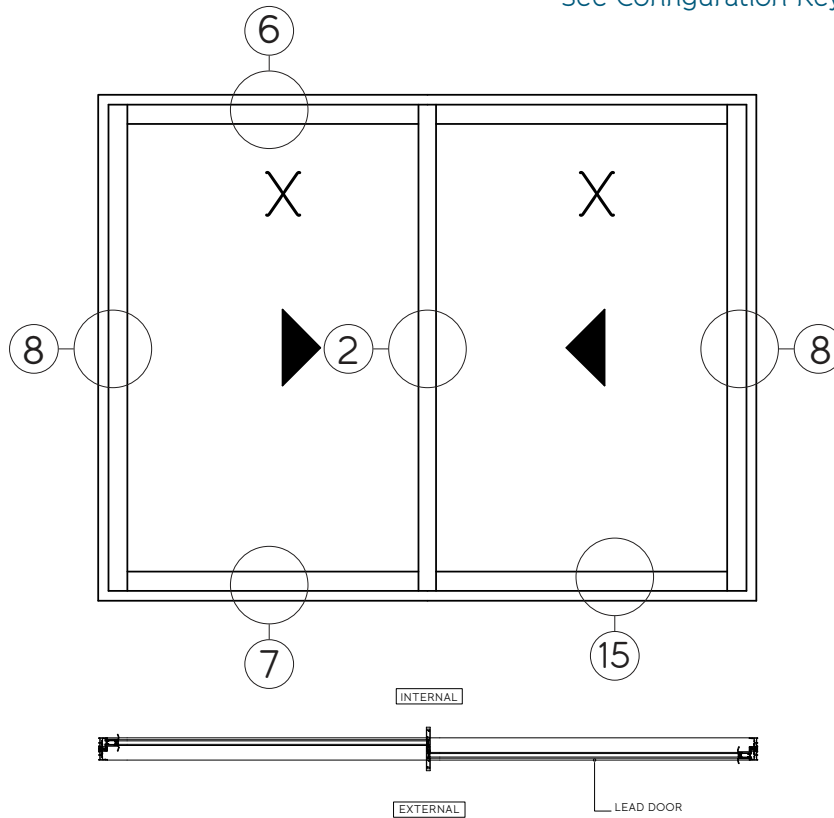

### Key features

- ▶ Both panels can be sliding, or one can be fixed with one sliding
- ▶ Traditional patio door style




2+0

See page 17 for configurations


Configuration Key

2a-2c - Sliding Interlocker to Sliding Interlocker Detail




See pages 30-32

6 - Sliding Panel To Double Frame (Top Track) Detail

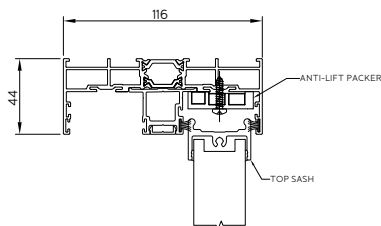


See page 36

7 - Sliding Panel To Double Frame (Bottom Track) Detail

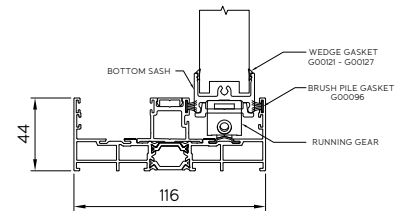


See page 37

8 - Sliding Panel To Double Frame (Jamb) Detail



See page 38

15 - Drainage Details Double Frame Detail




See page 45

Master Configuration: OXX (1 fixed, 2 sliding) or XXX (3 sliding)

16 Drainage Details Triple Frame Detail

See Configuration Key for section detail ▶

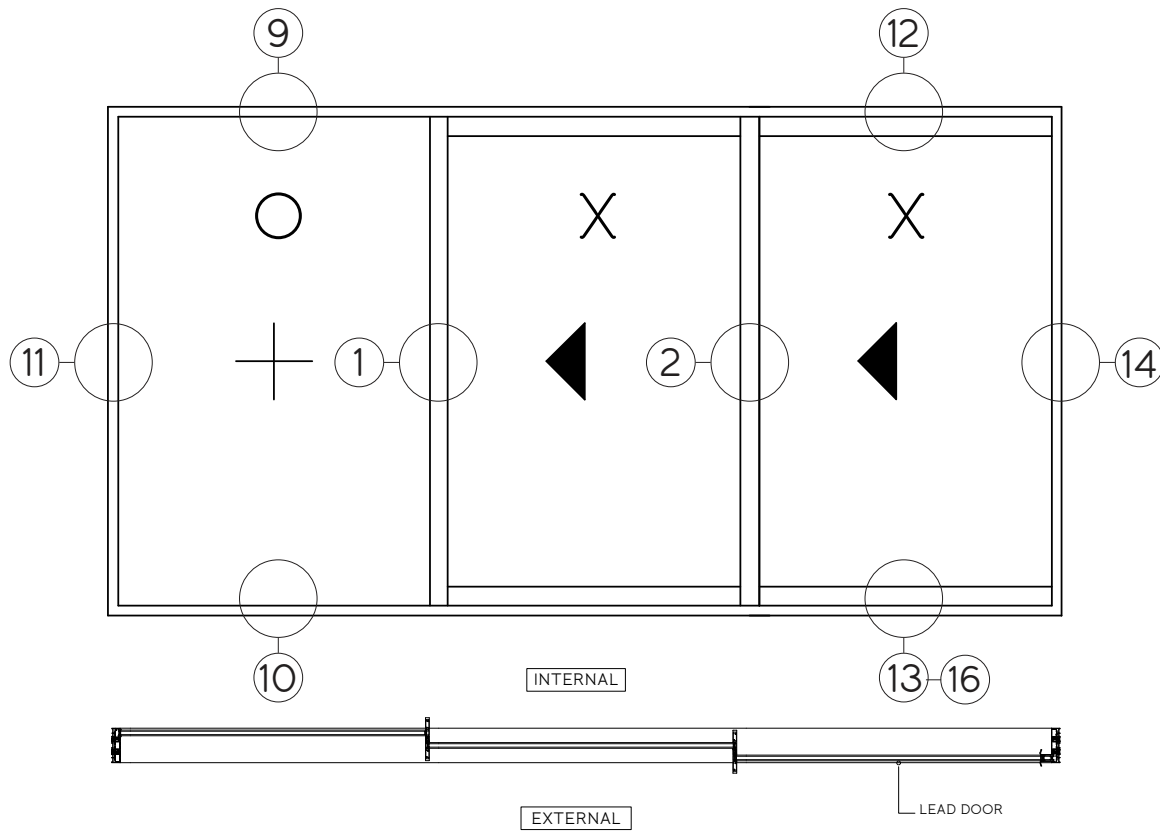

Key features


- ▶ Fixed pane can be specified on the left or right
- ▶ All panes can slide or flexible opening



2+1  
See page 17 for configurations


Configuration Key

1a-1c- Fixed Interlocker To Sliding Interlocker Detail




See pages 27-29

2a-2c - Sliding Interlocker to Sliding Interlocker Detail




See pages 30-32

9 - Fixed Panel To Triple Frame (Top Track) Detail

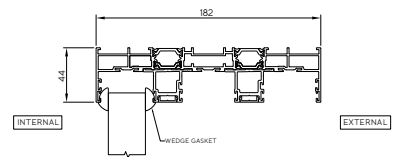


See page 39

10 - Fixed Panel To Triple Frame (Bottom Track) Detail

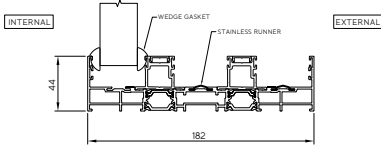


See page 40

11 - Fixed Panel To Triple Frame (Jamb) Detail




See page 41

12 - Sliding Panel To Triple Frame (Top Track) Detail

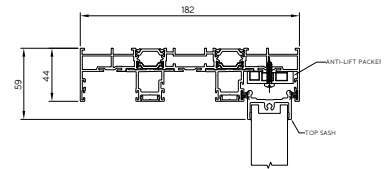


See page 42

13 - Sliding Panel To Triple Frame (Bottom Track) Detail

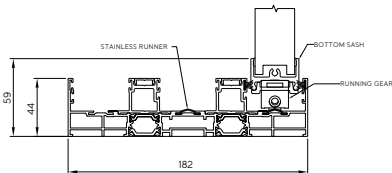


See page 43

14 - Sliding Panel To Triple Frame (Jamb) Detail





See page 44

16 - Drainage Details Triple Frame Detail



See page 46

Master Configuration: OXXO (1 fixed, 2 sliding, 1 fixed)

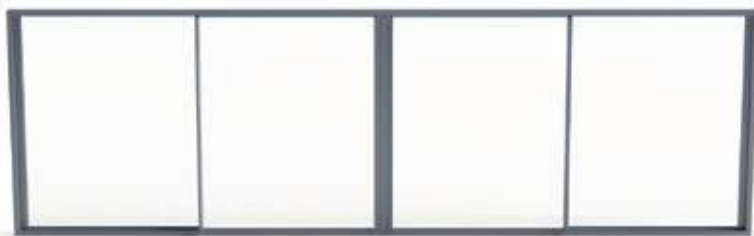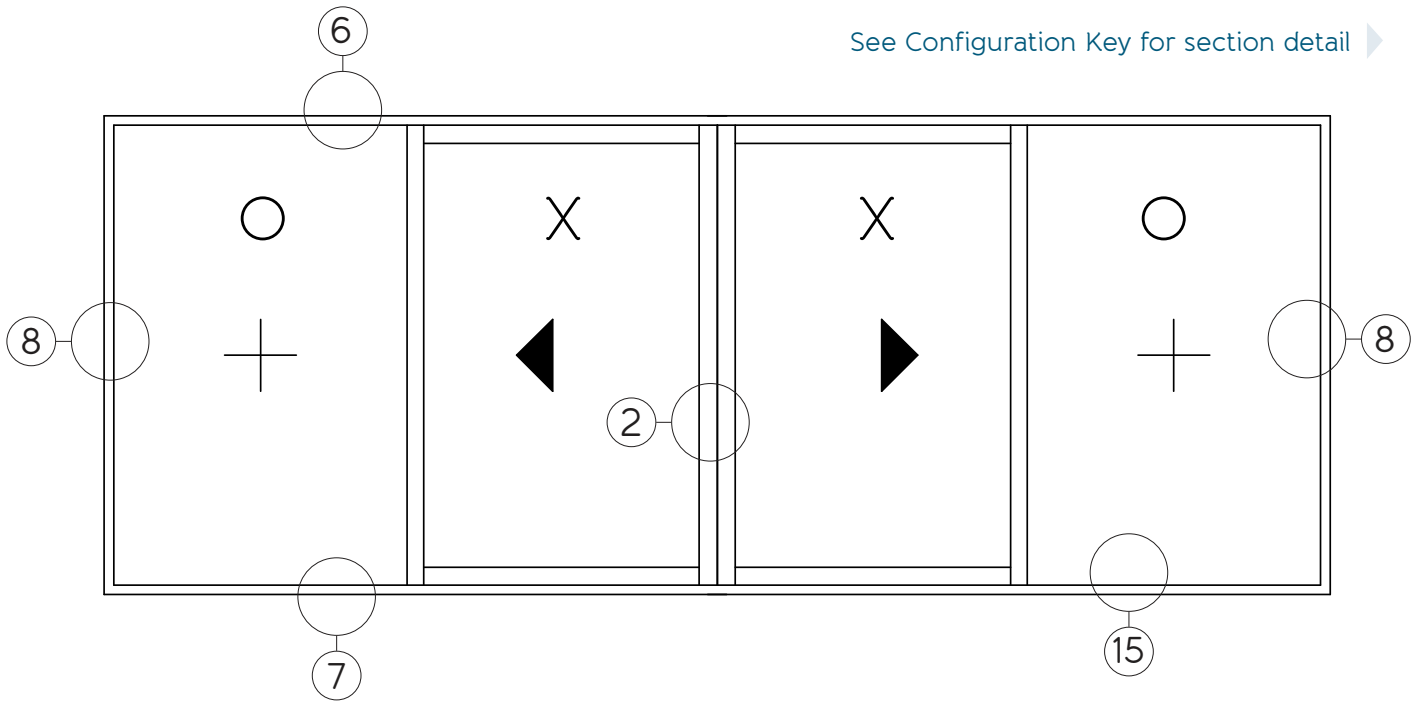


### Key features

- ▶ Fixed pane can be specified on the left or right

See page 17 for configurations


Configuration Key

2a-2c - Sliding Interlocker to Sliding Interlocker Detail




See pages 30-32

6 - Sliding Panel To Double Frame (Top Track) Detail

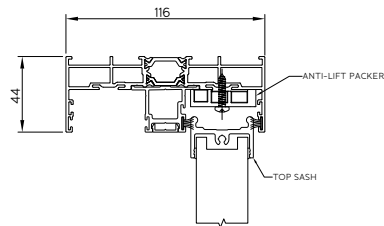


See page 36

7 - Sliding Panel To Double Frame (Bottom Track) Detail

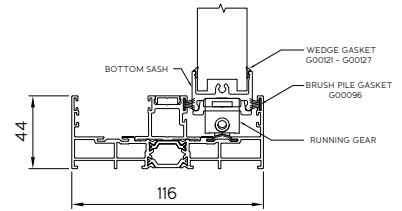


See page 37

8 - Sliding Panel To Double Frame (Jamb) Detail



See page 38


15 - Drainage Details Double Frame Detail



See page 45

Master Configuration: OXXXXO (1 fixed, 4 sliding, 1 fixed)

See Configuration Key for section detail ▶

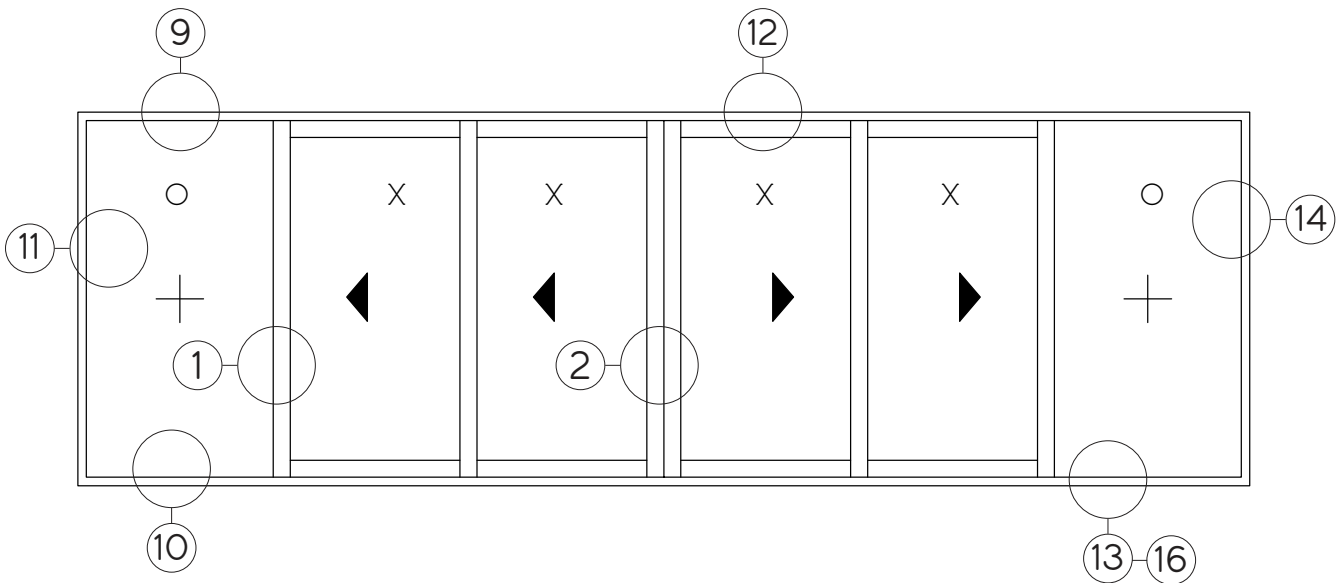

\*The interlocker will be dependent on the system chosen.



### Key features


- ▶ Fixed pane can be specified on the left or right

See page 17 for configurations




Configuration Key

1a-1c- Fixed Interlocker To Sliding Interlocker Detail




See pages 27-29

2a-2c - Sliding Interlocker to Sliding Interlocker Detail




See pages 30-32

9 - Fixed Panel To Triple Frame (Top Track) Detail

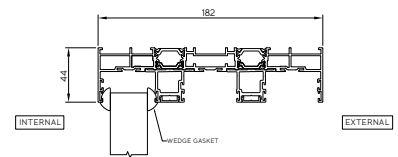


See page 39

10 - Fixed Panel To Triple Frame (Bottom Track) Detail

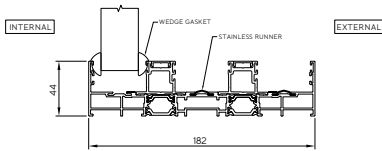


See page 40

11 - Fixed Panel To Triple Frame (Jamb) Detail




See page 41

12 - Sliding Panel To Triple Frame (Top Track) Detail

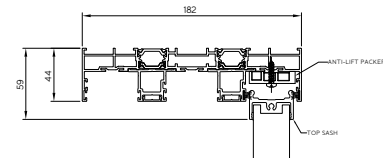


See page 42

13 - Sliding Panel To Triple Frame (Bottom Track) Detail

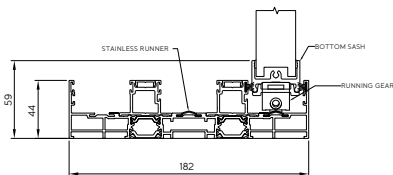


See page 43

14 - Sliding Panel To Triple Frame (Jamb) Detail



See page 44


16 - Drainage Details Triple Frame Detail



See page 46


# Technical Drawings

## Interlocker Options

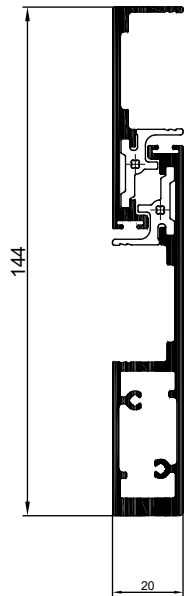


Small Interlock

Medium Interlock

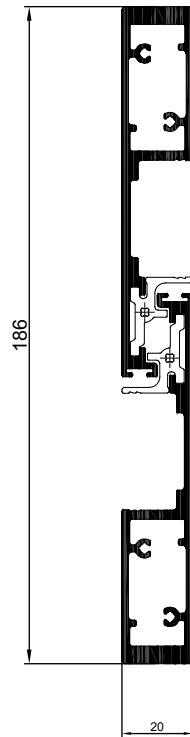

Medium Interlock

Medium Interlock

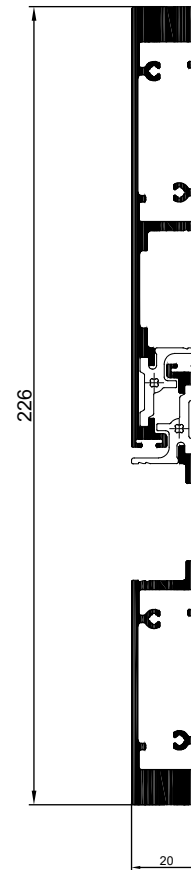

Large Interlock



Large Interlock

For doors up to 2325mm high



For doors between 2326mm and 2625mm high

For doors between 2626mm and 3000mm high



1a Fixed Small Interlocker To Sliding Medium Interlocker Detail

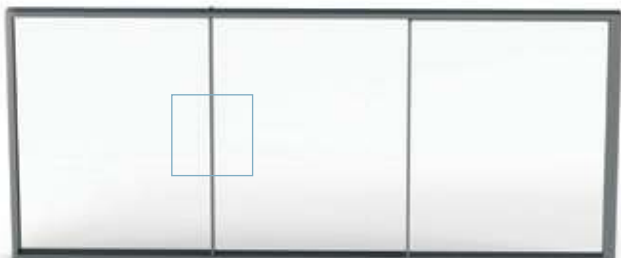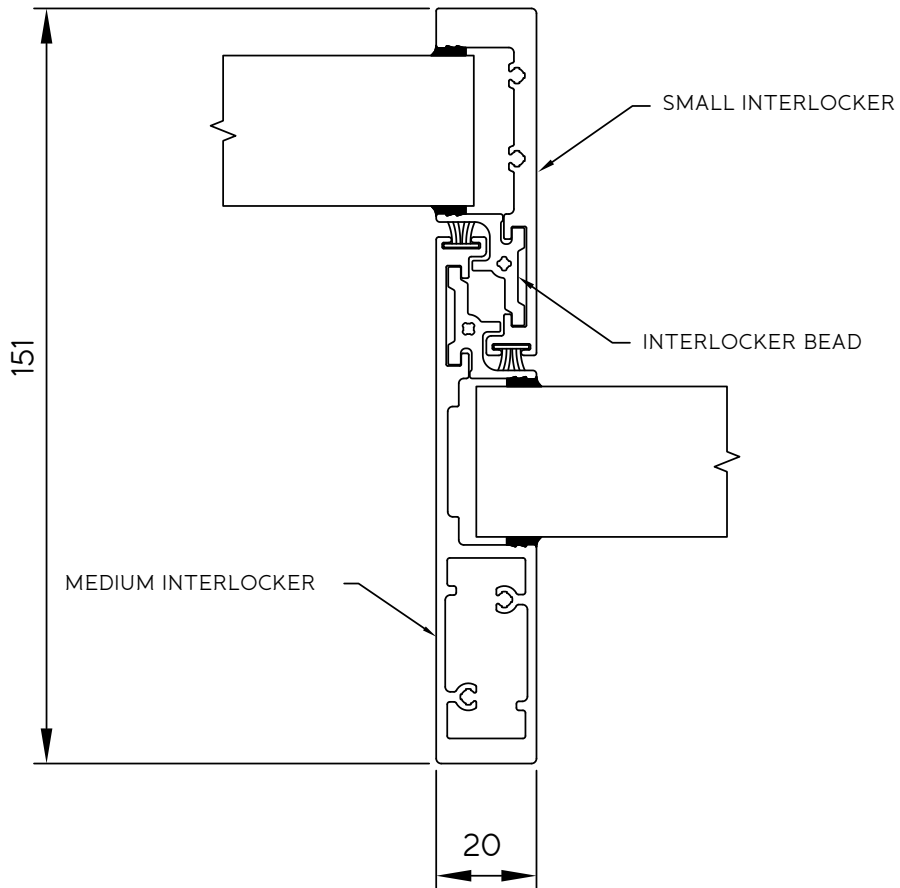



1b Fixed Medium Interlocker To Sliding Medium Interlocker Detail

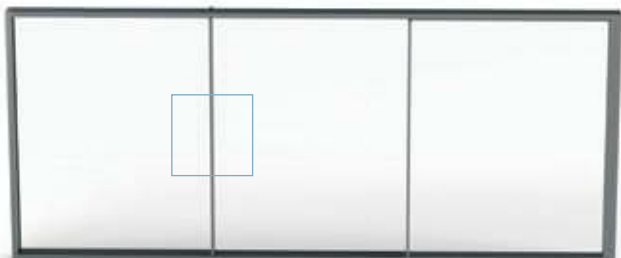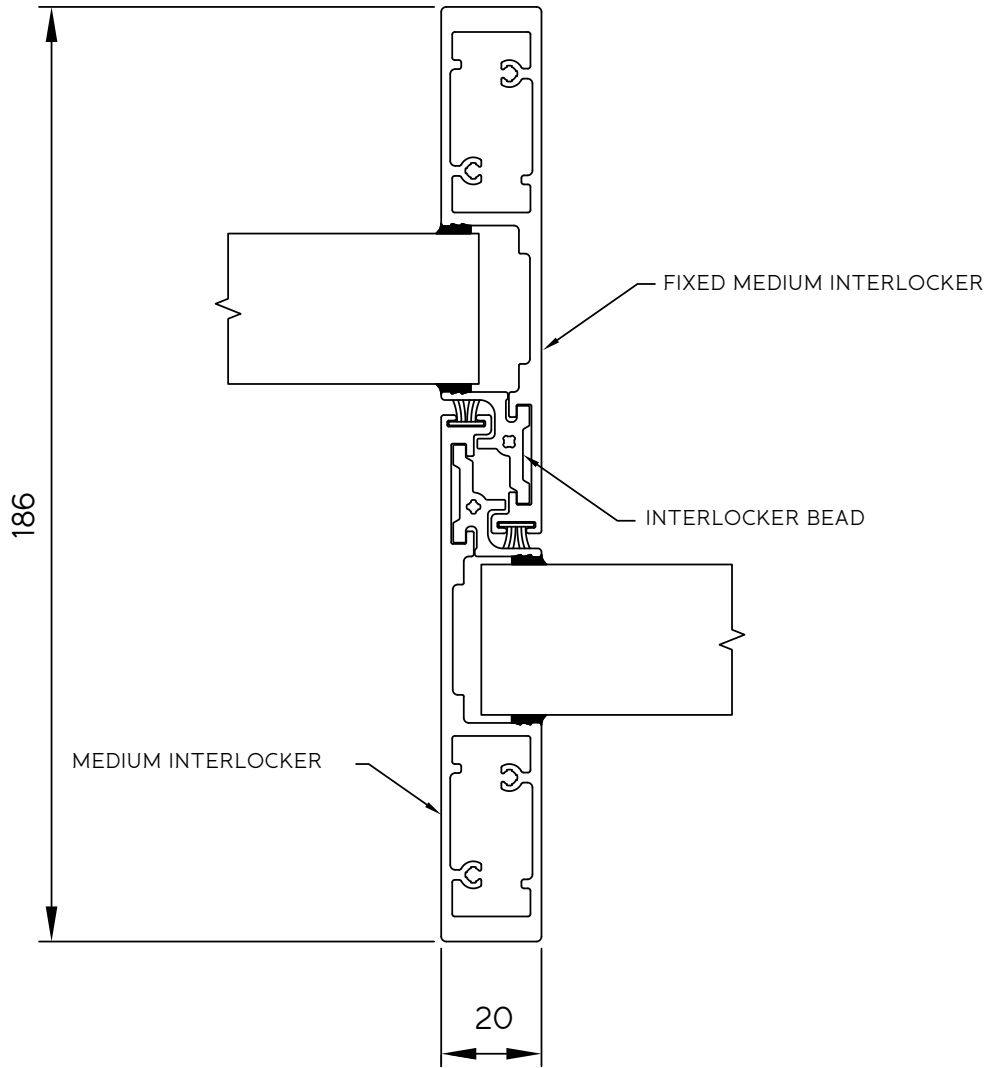



1c Fixed Large Interlocker To Sliding Large Interlocker Detail

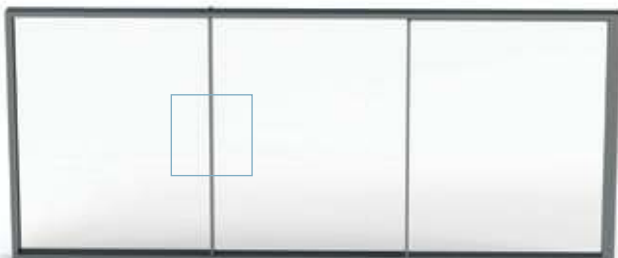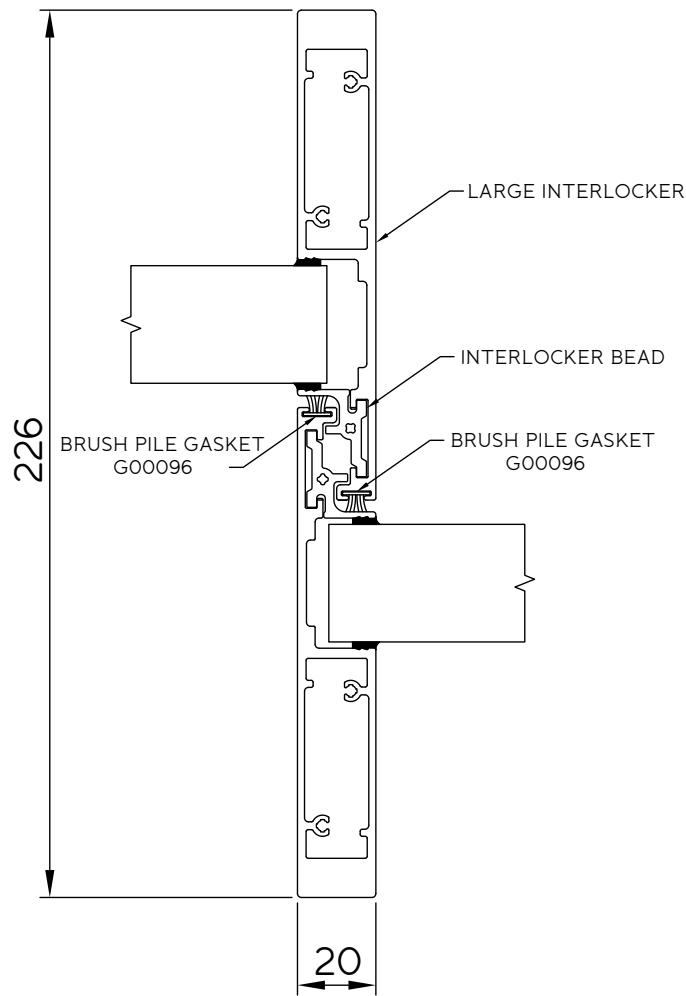



2a Sliding Small Interlocker To Sliding Medium Interlocker Detail

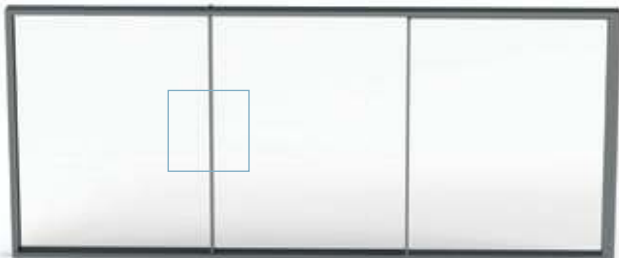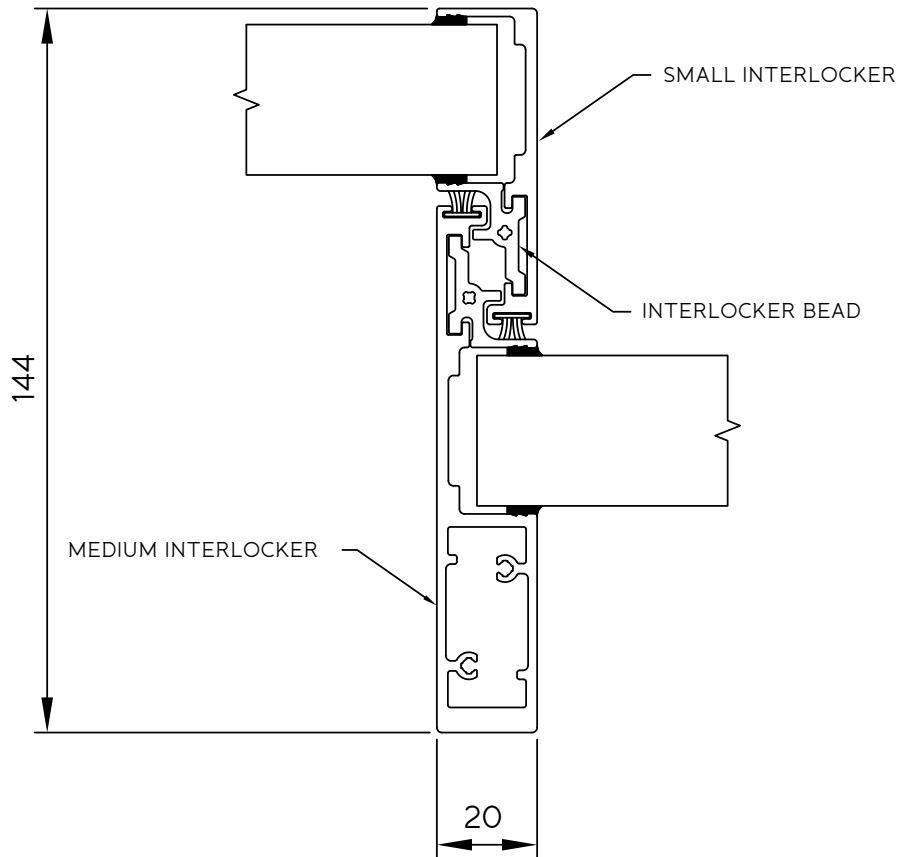

2b Sliding Medium Interlocker To Sliding Medium Interlocker Detail

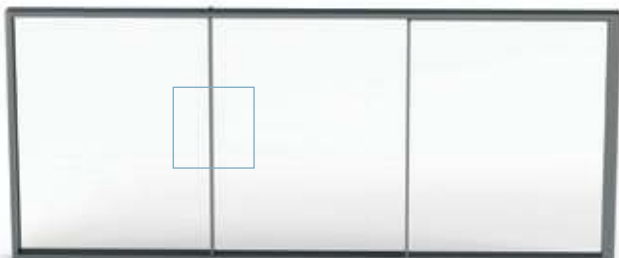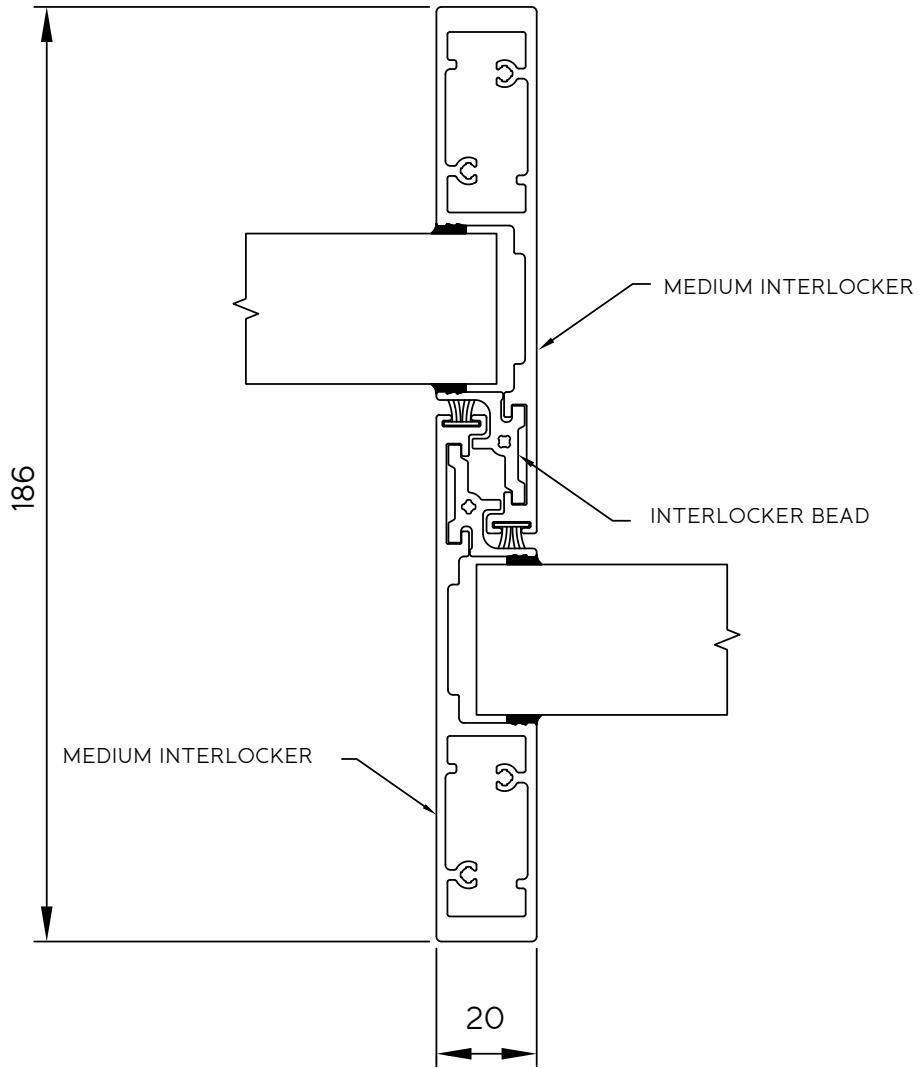


2c Sliding Large Interlocker to Sliding Large Interlocker Detail

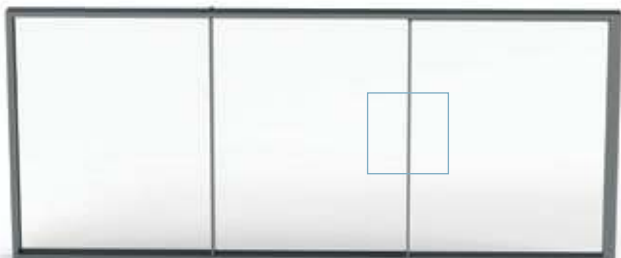
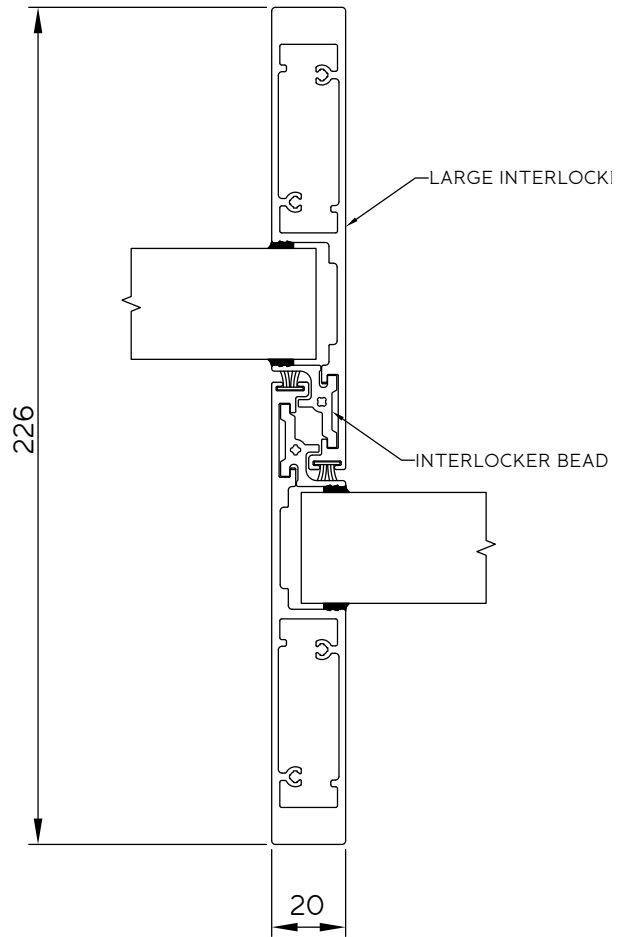





3 Fixed Panel To Double Frame (Top Track) Detail

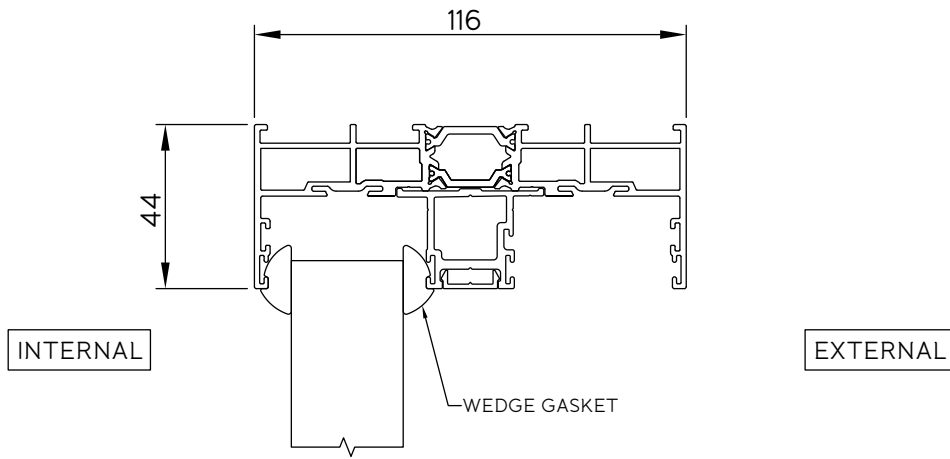


4 Fixed Panel To Double Frame (Bottom Track) Detail

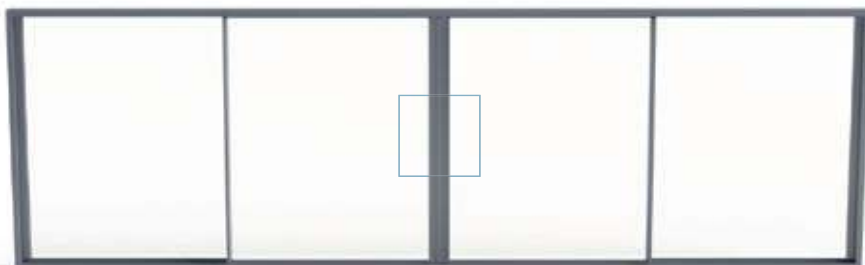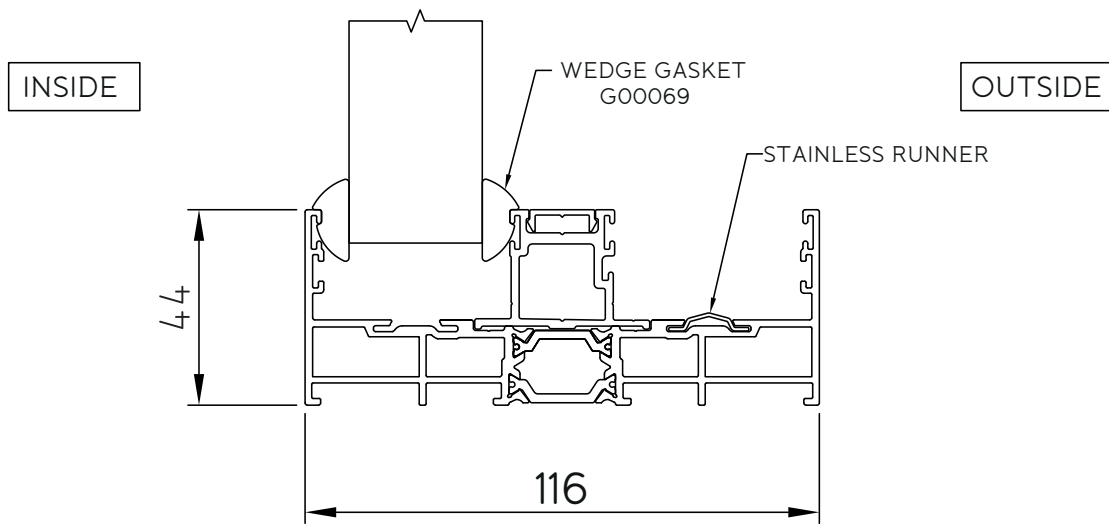


5 Fixed Panel To Double Frame (Jamb) Detail

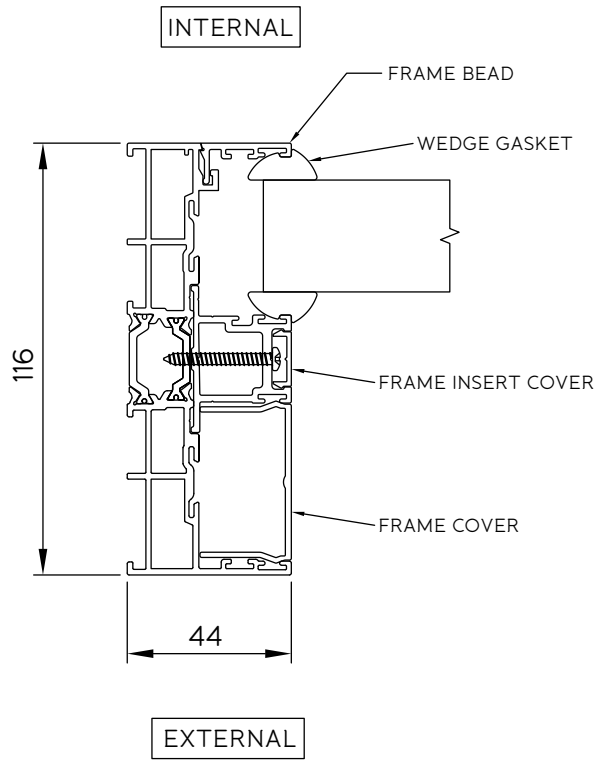


6 Sliding Panel To Double Frame (Top Track) Detail

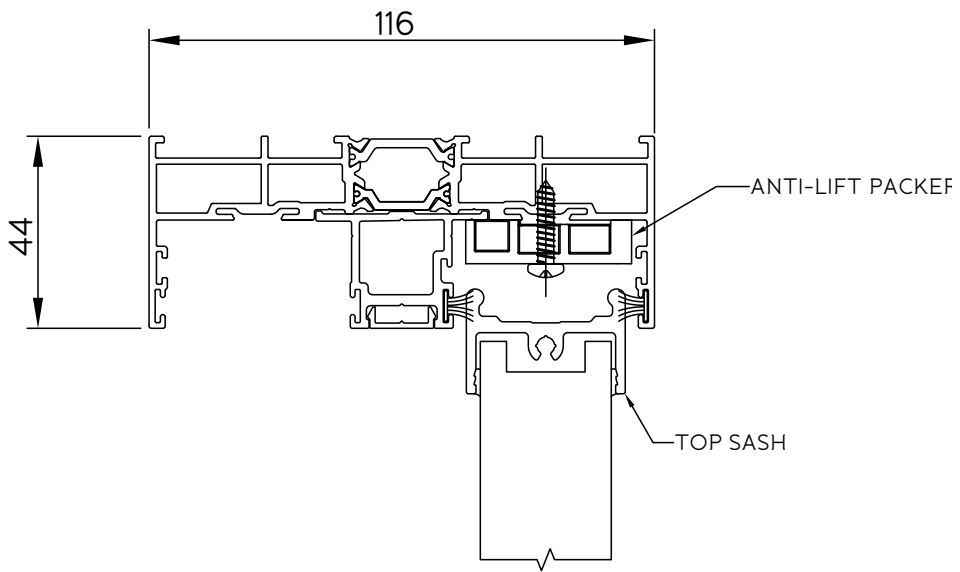


7 Sliding Panel To Double Frame (Bottom Track) Detail

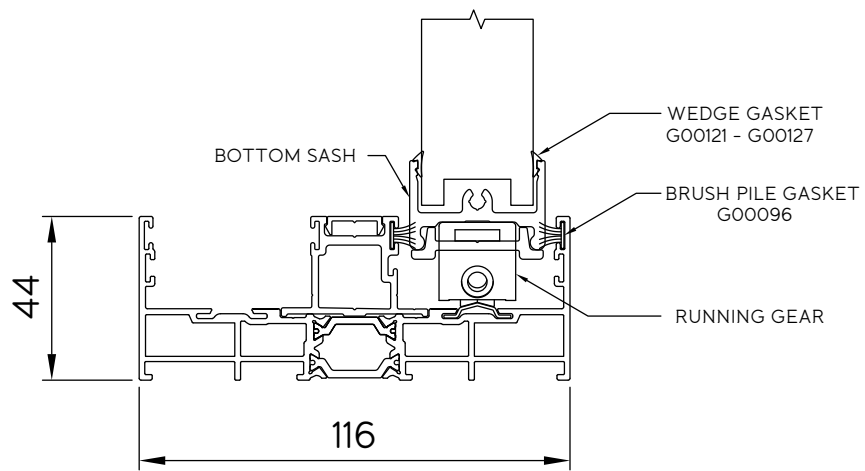



8 Sliding Panel To Double Frame (Jamb) Detail

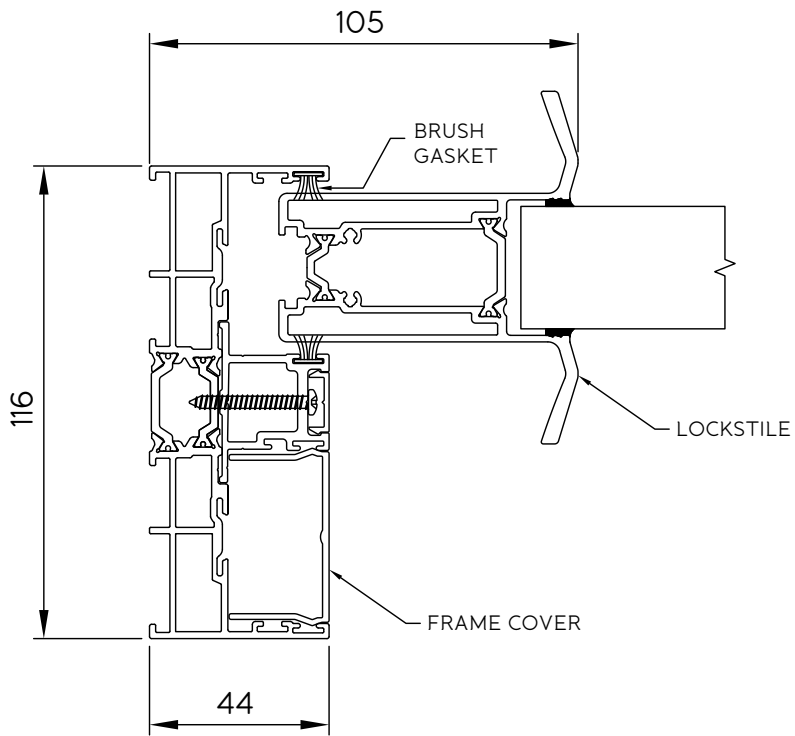

9 Fixed Panel To Triple Frame (Top Track) Detail

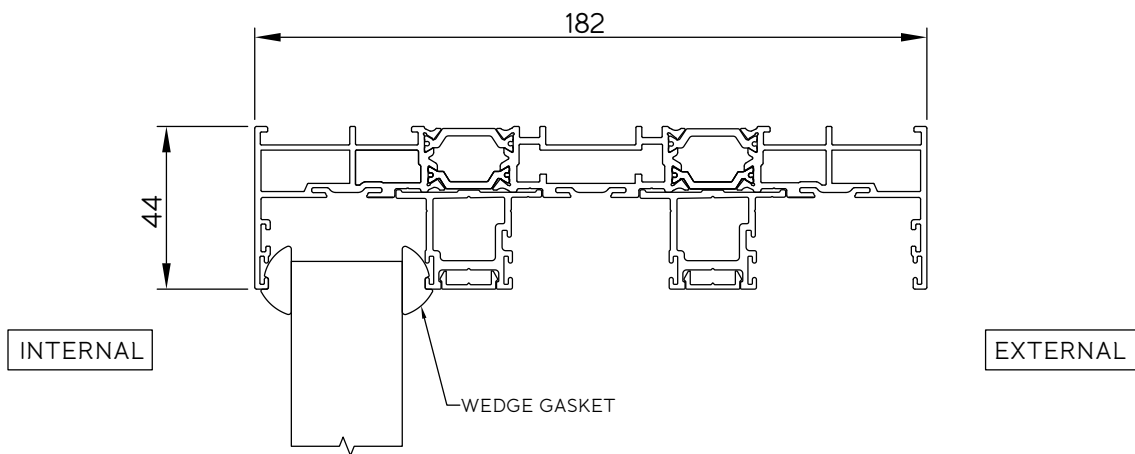


10 Fixed Panel To Triple Frame (Bottom Track) Detail

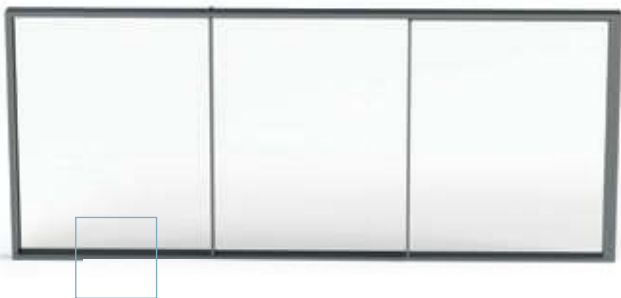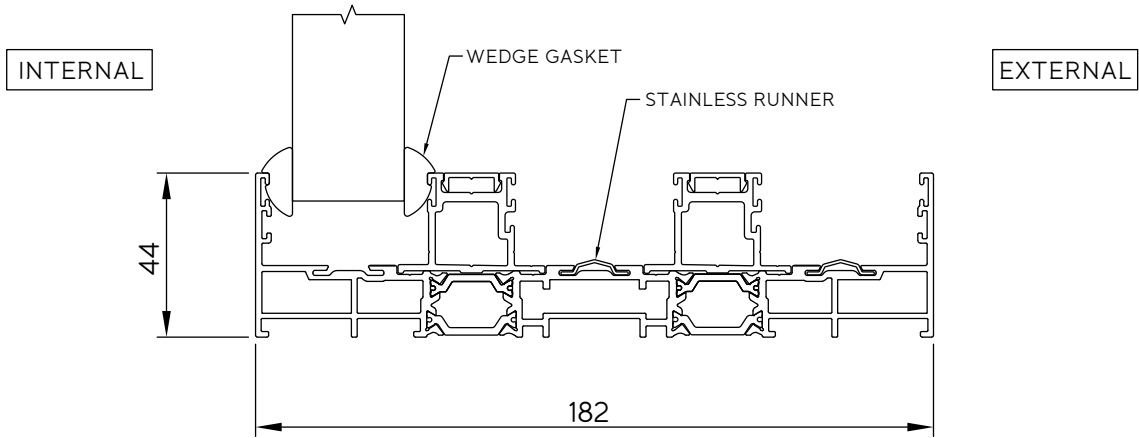




11 Fixed Panel To Triple Frame (Jamb) Detail

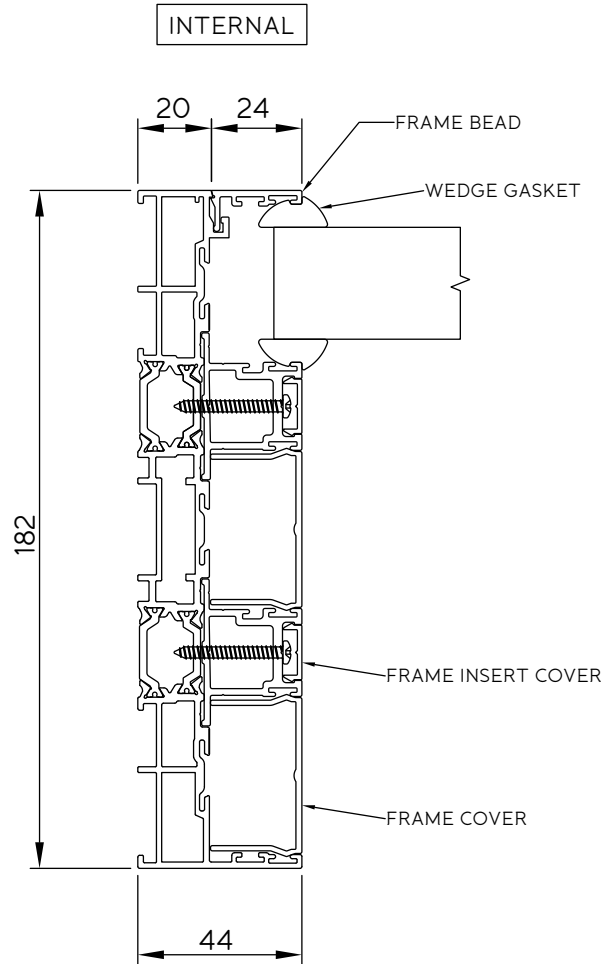



EXTERNAL




12 Sliding Panel To Triple Frame (Top Track) Detail

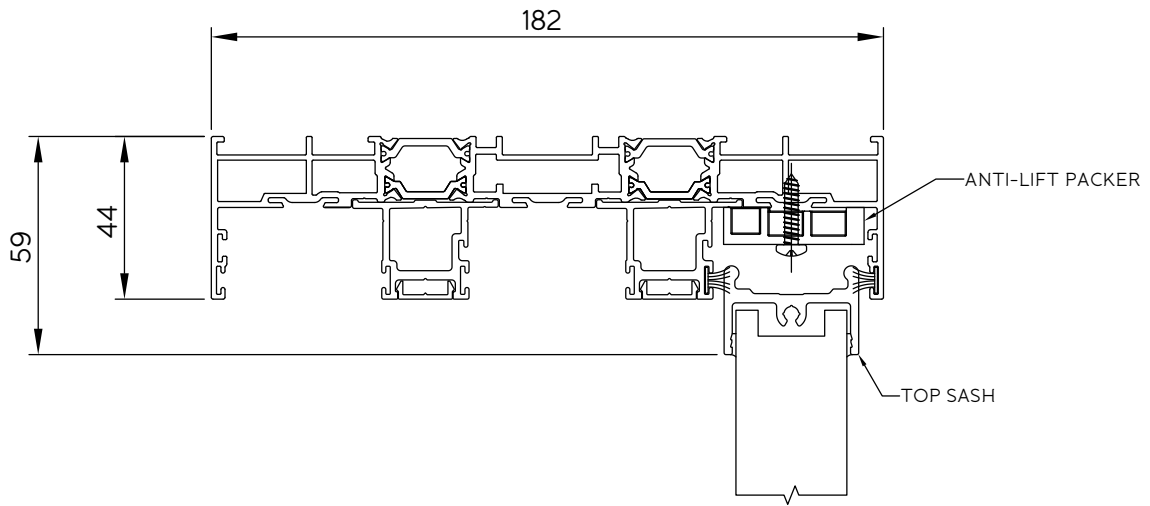

13 Sliding Panel To Triple Frame (Bottom Track) Detail

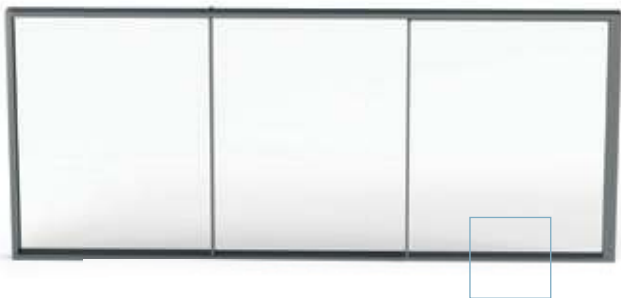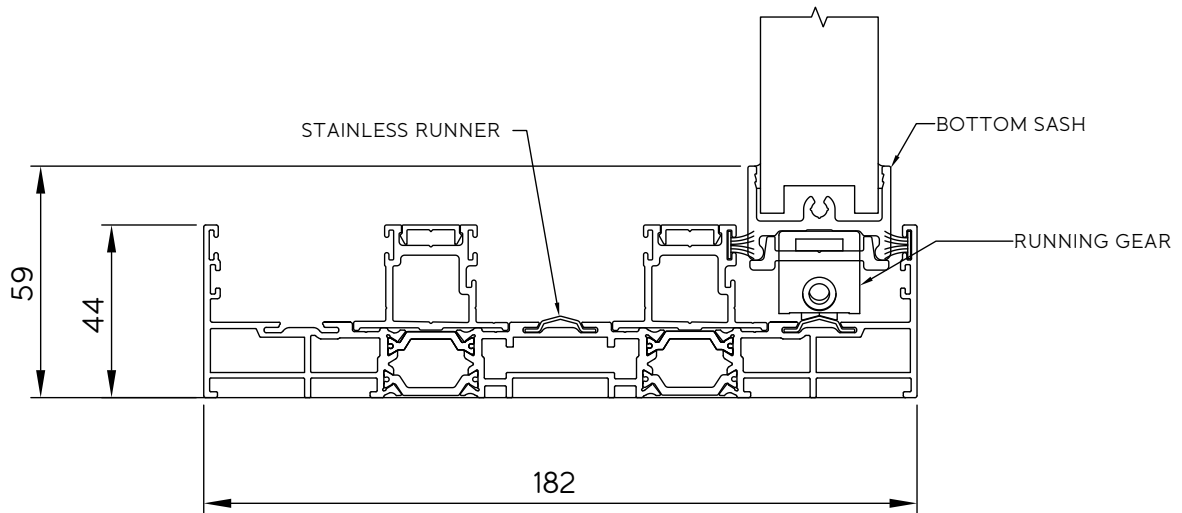


14 Sliding Panel To Triple Frame (Jamb) Detail

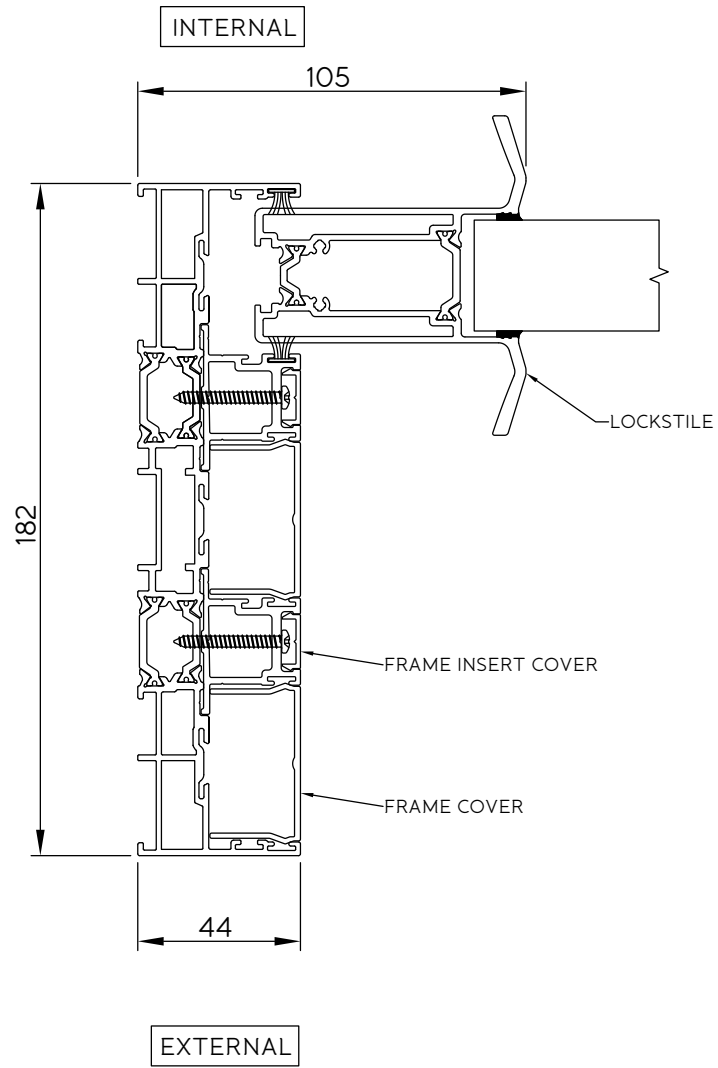


15 Drainage Details Double Frame Detail


Frame Drainage with Fixed Panel

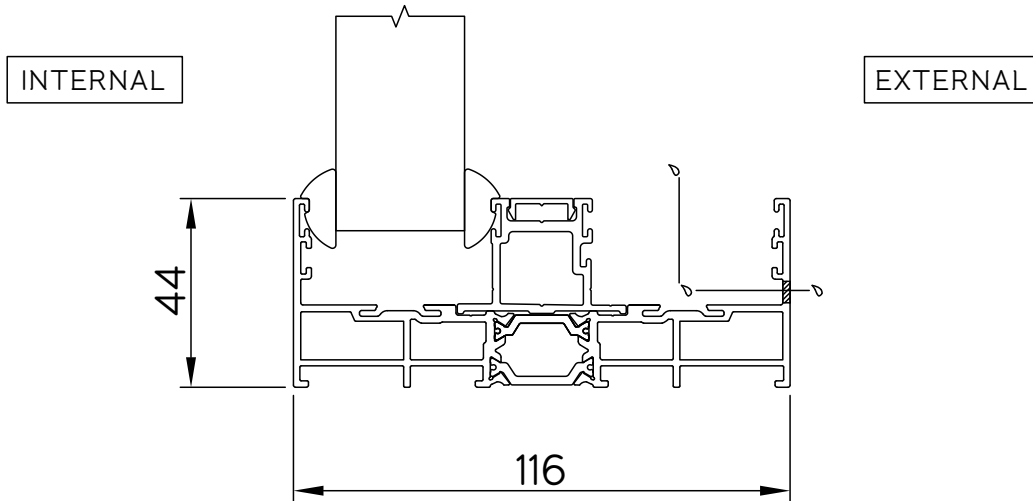


Frame Drainage

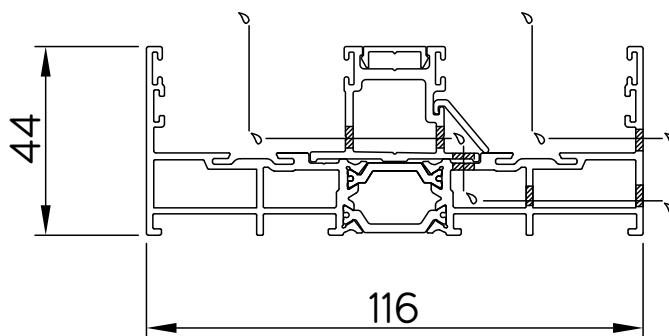




16 Drainage Details Triple Frame Detail

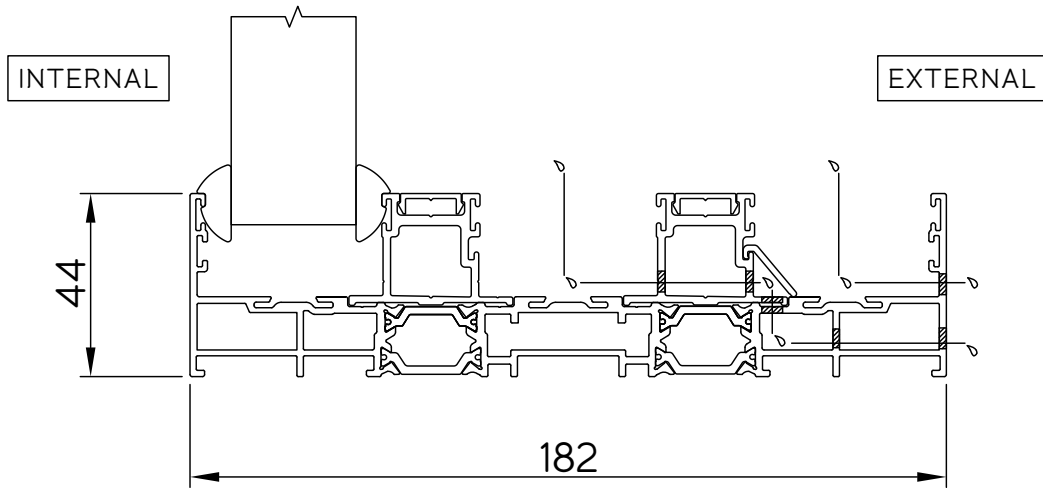


Frame Drainage

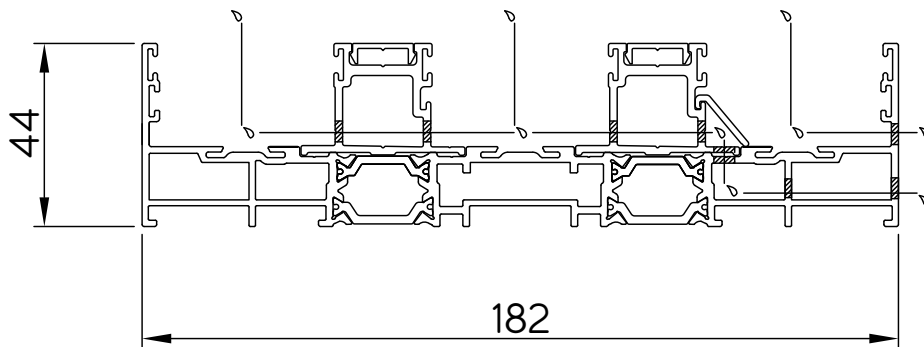

17 Drip Bar (Optional Extra) Detail

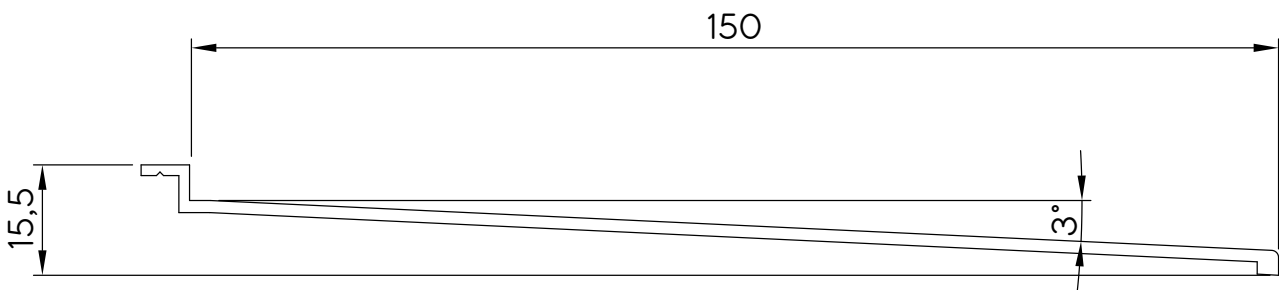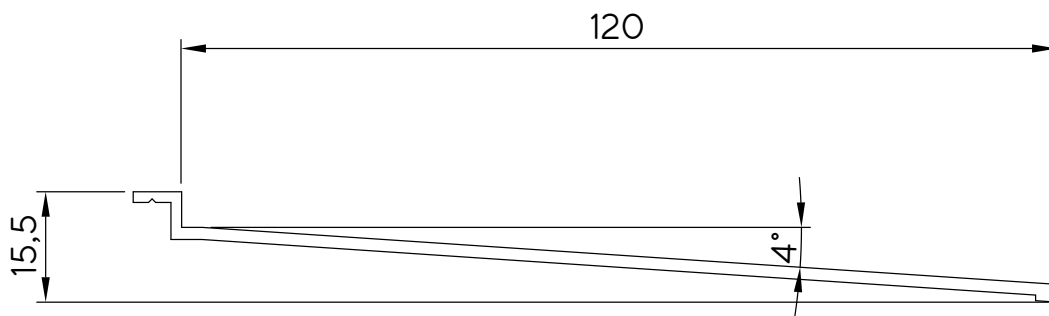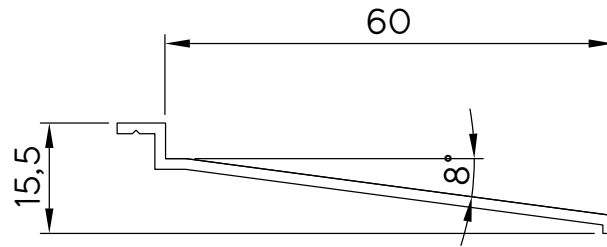


18a Cill Double Frame Detail

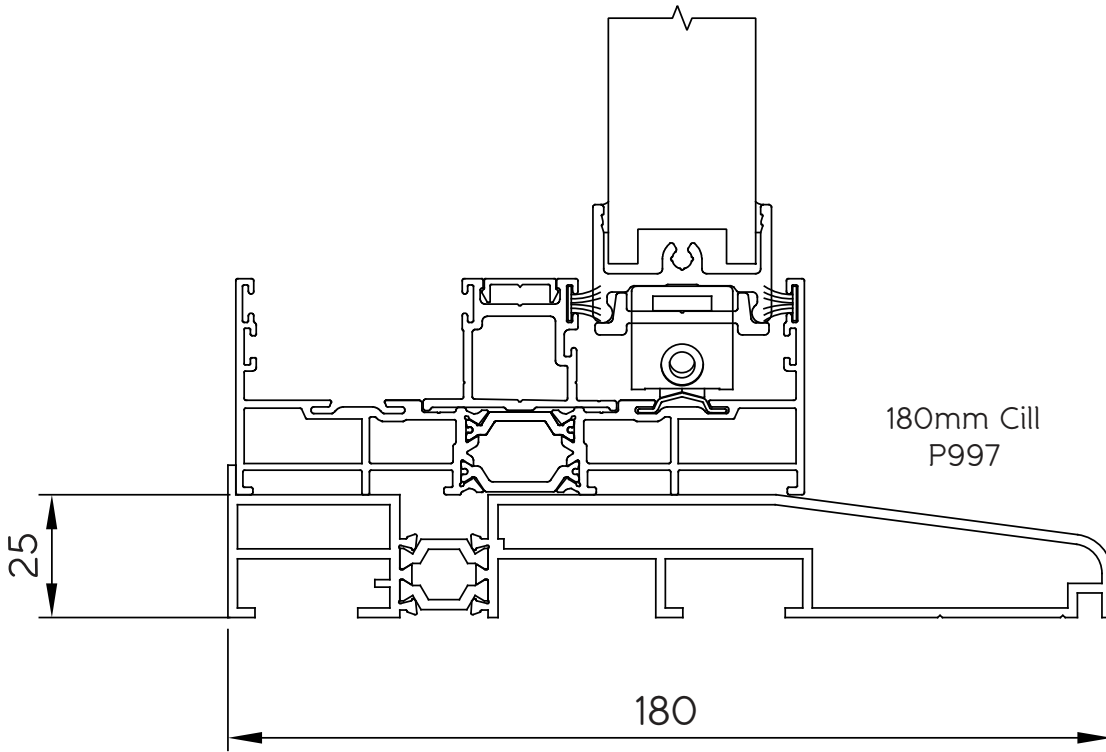





18b Cill Triple Frame Detail

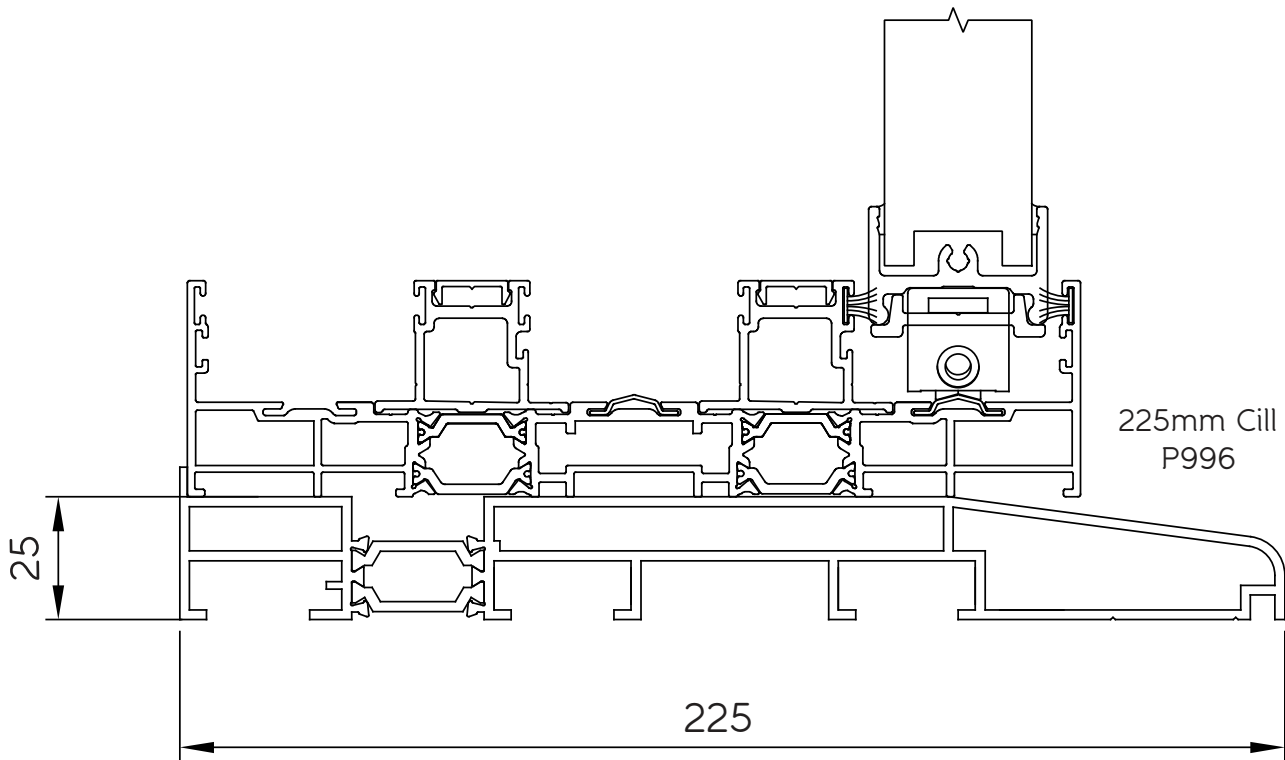

19a Frame Extender (Double Frame) Detail

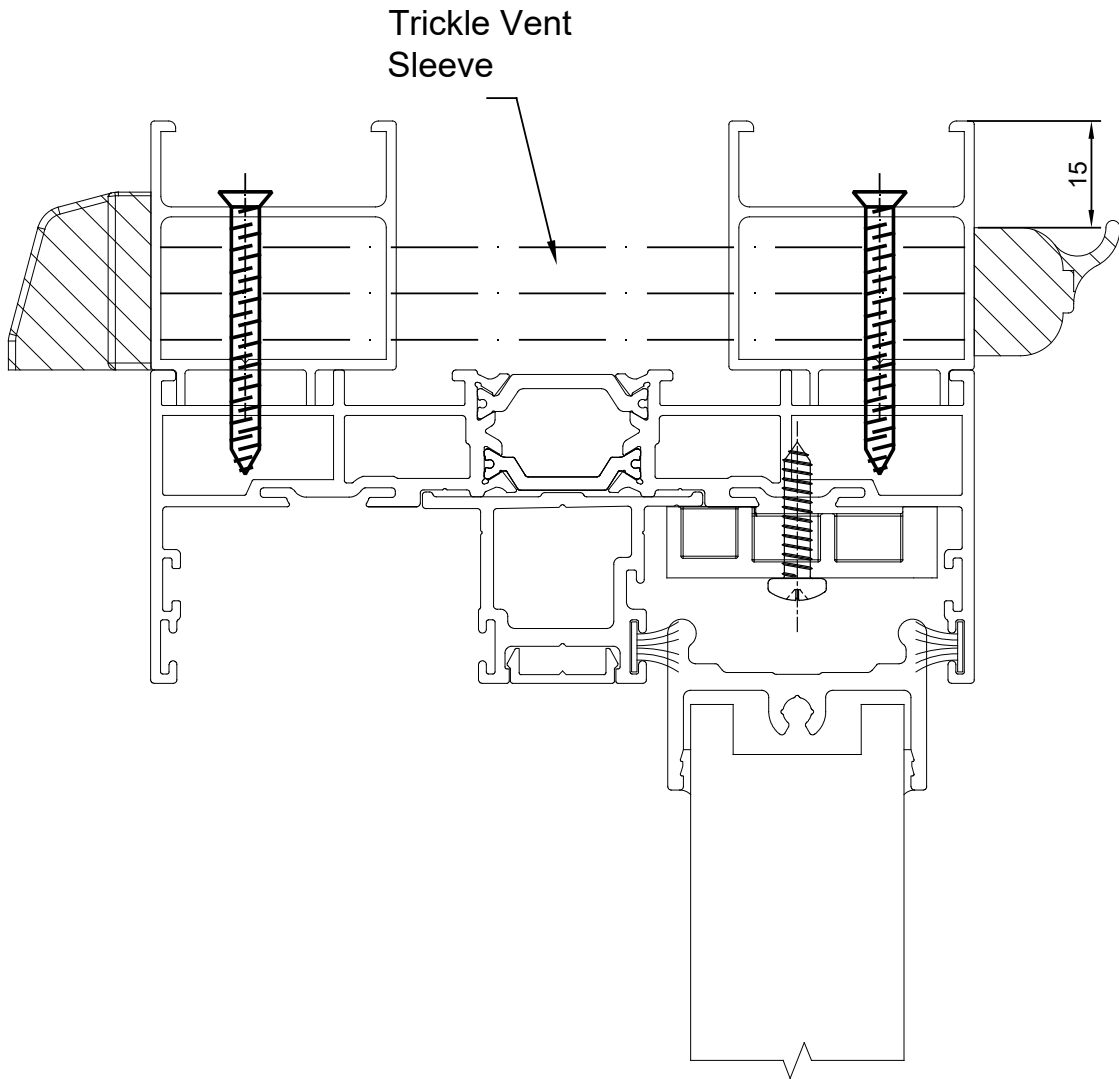


19b Frame Extender (Triple Frame) Detail

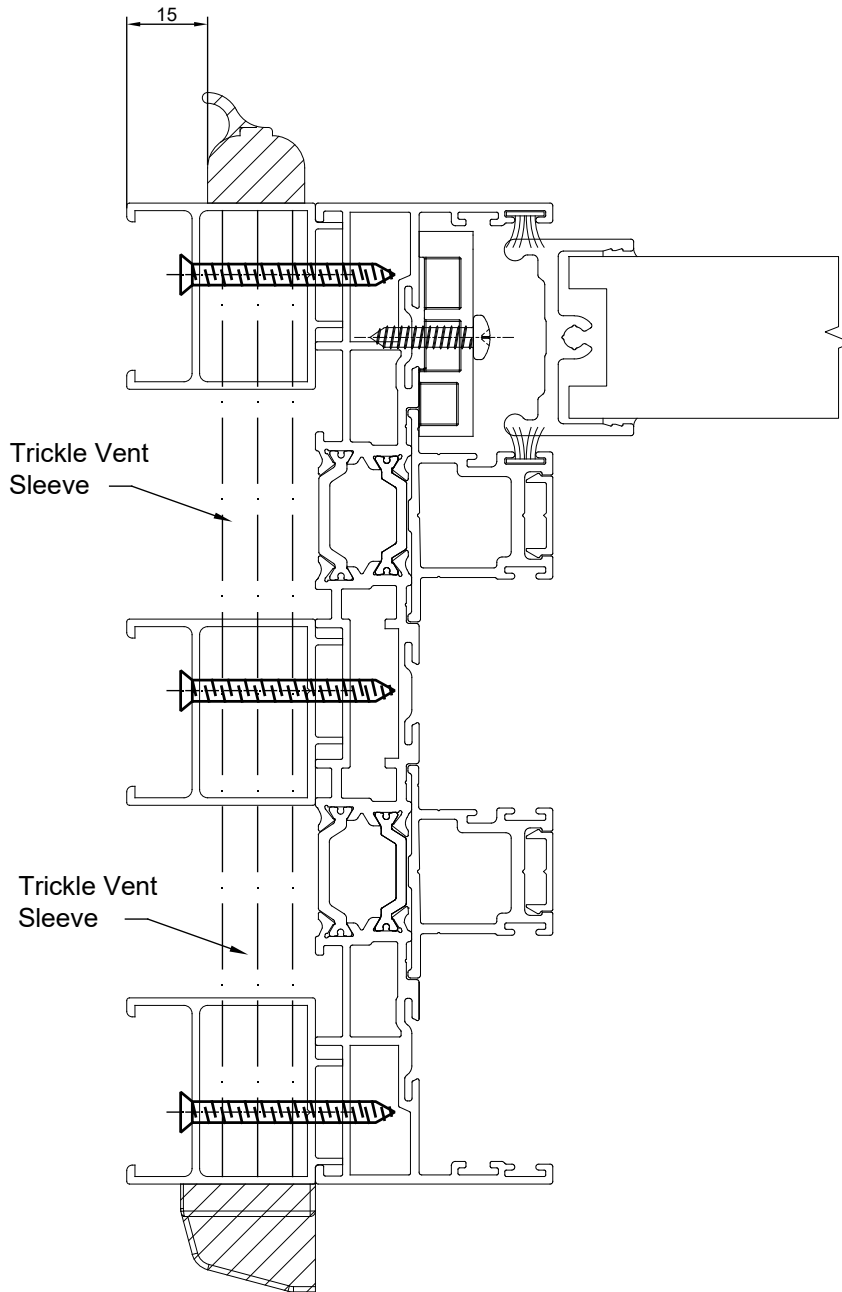



19c 35mm Frame Extender Detail (Optional Extra)

A 35mm frame extender is available which allows for plaster lines on ceilings and also more room which also allow trickle vents to be fitted.


Please note an overall 15mm will need to be deducted from your measurements.

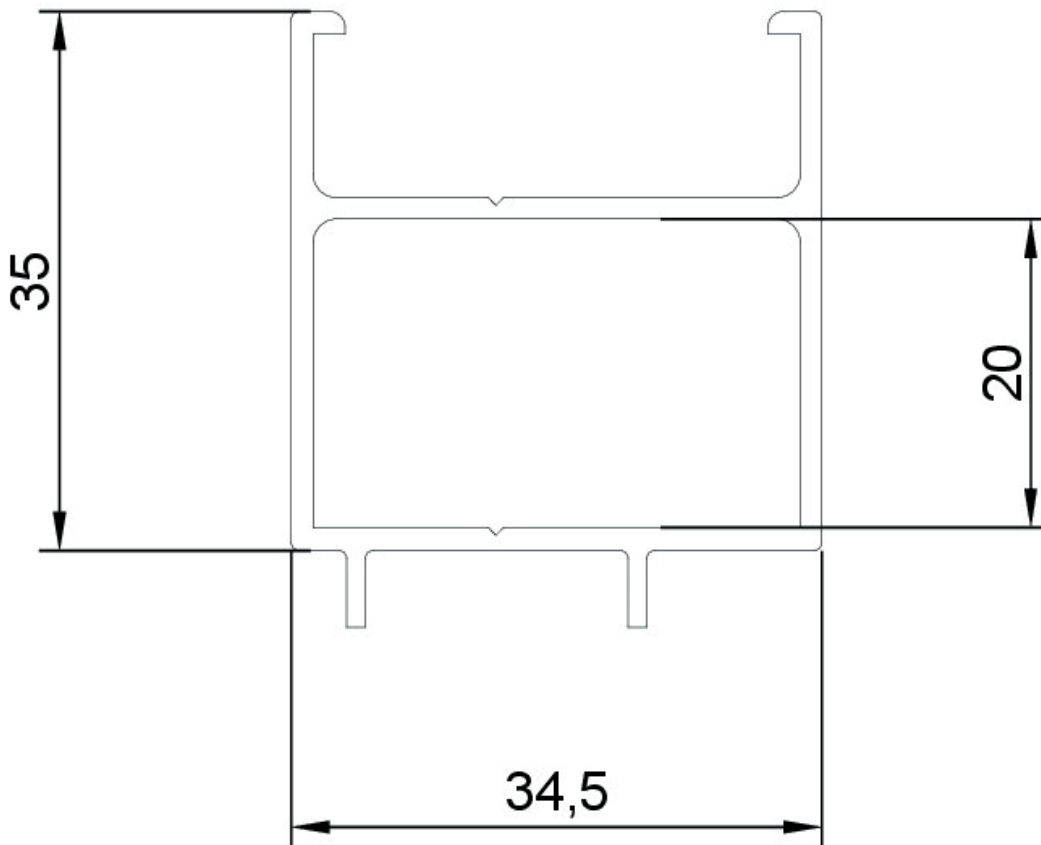


20 Sliding Panel To Sliding Panel Detail

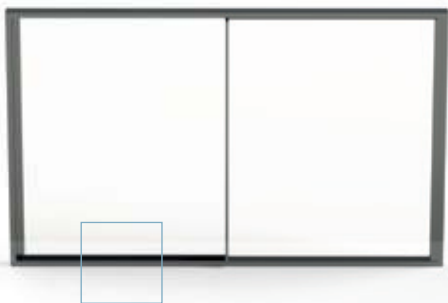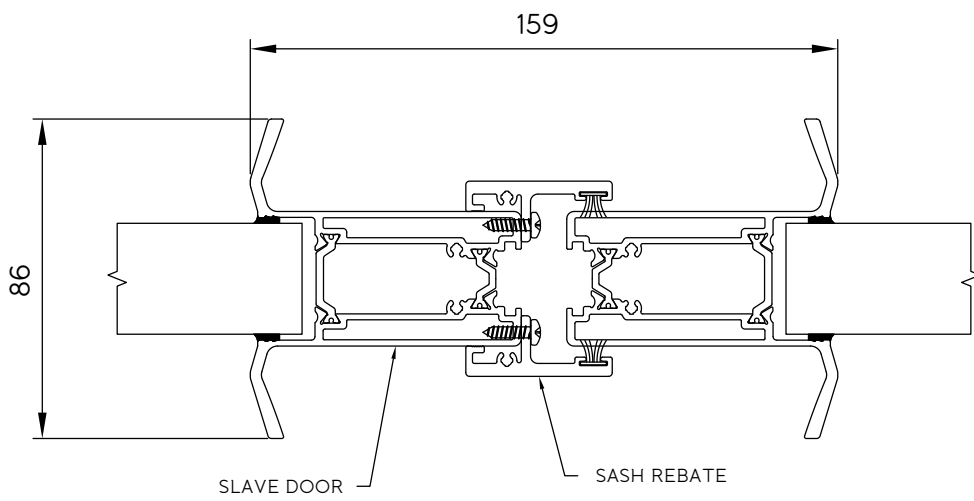

# Handles

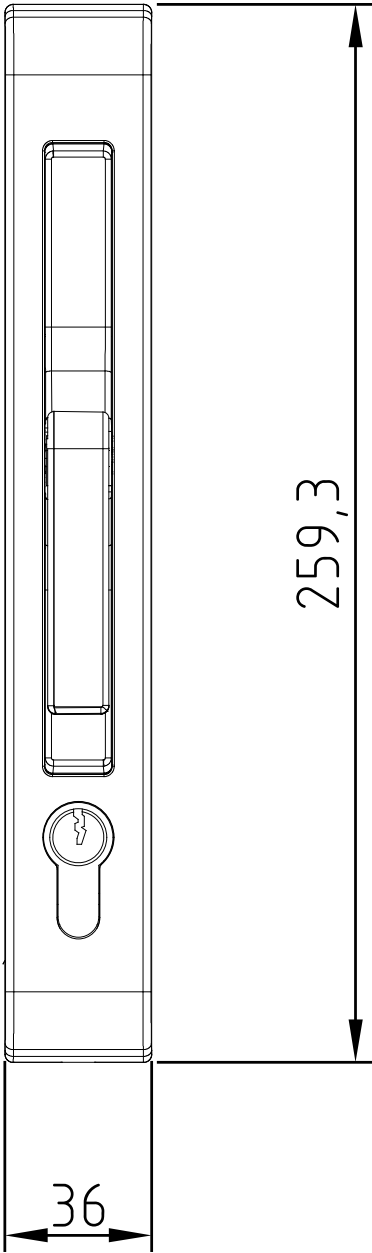


Flush faced lever handle

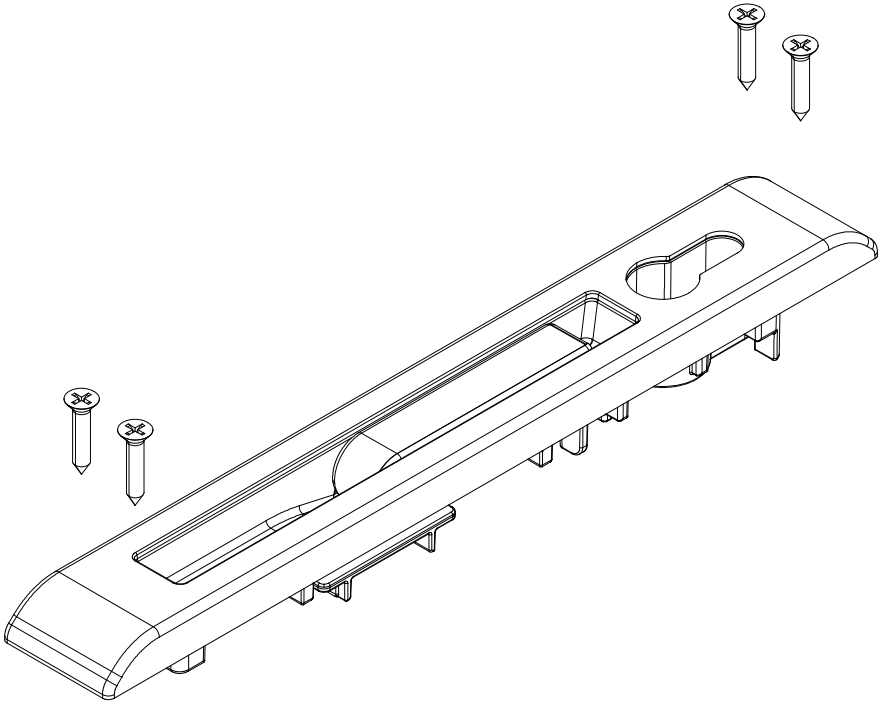

# Gaskets

Fixed Panel Wedge Gasket -

G00069



Sash Wedge Gasket

W401-3 - G00125



Sash Wedge Gasket

W401-4 - G00126



Sash Wedge Gasket

W401-5 - G00127




Sash Wedge Gasket

W401-6 - G00121




Woolpile 7x7mm

G00096




# Installation Guide

## 1. Prepare the opening

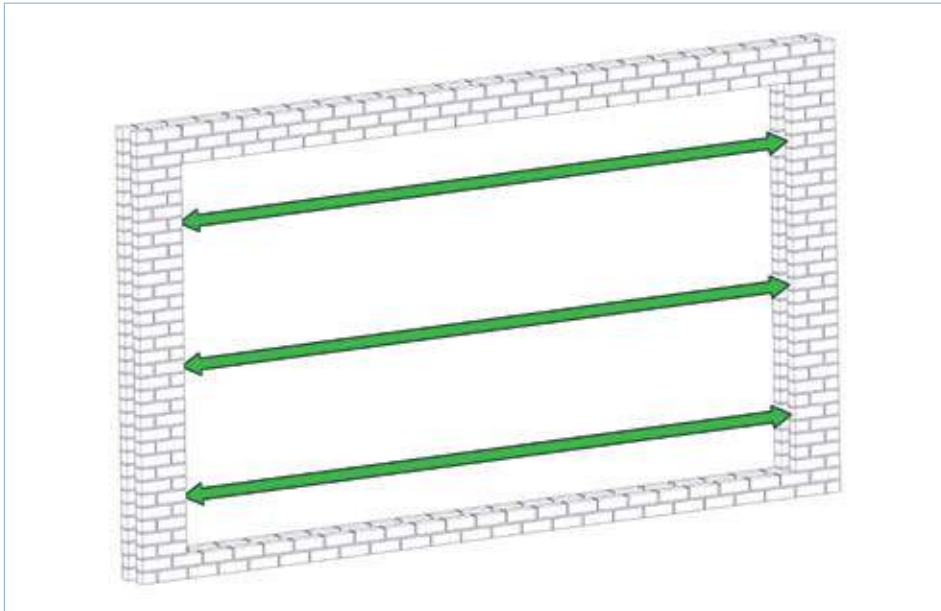

Measure aperture width.

FIG 1

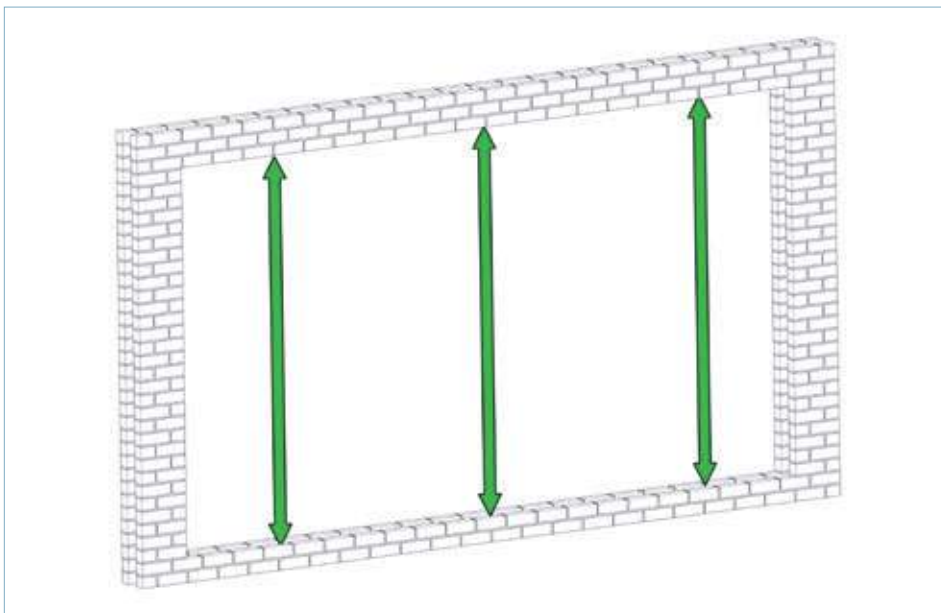

Measure aperture height.

FIG 2




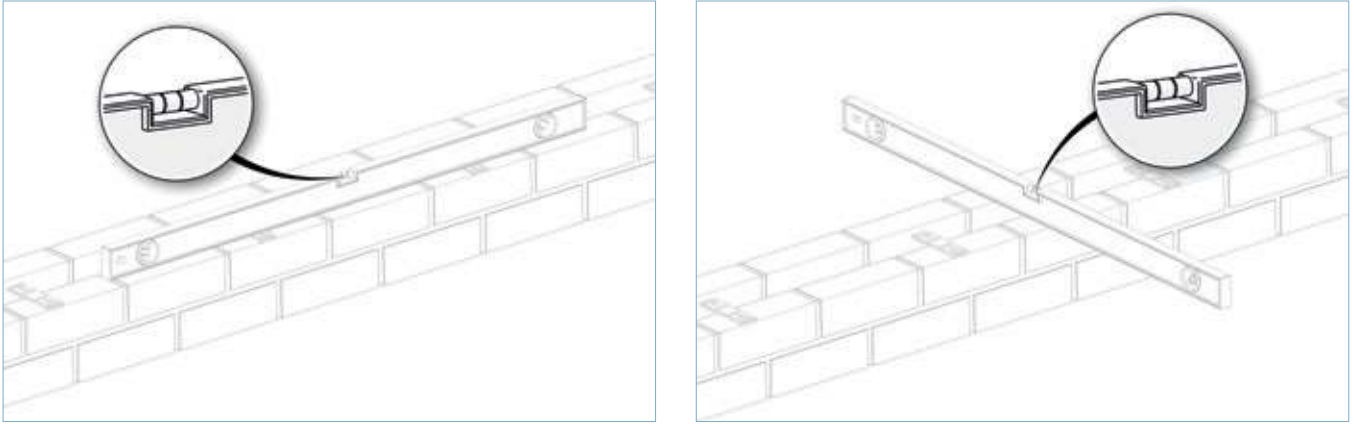


FIG 3

Level the threshold in both directions, packing every 500mm apart for the length of the opening.

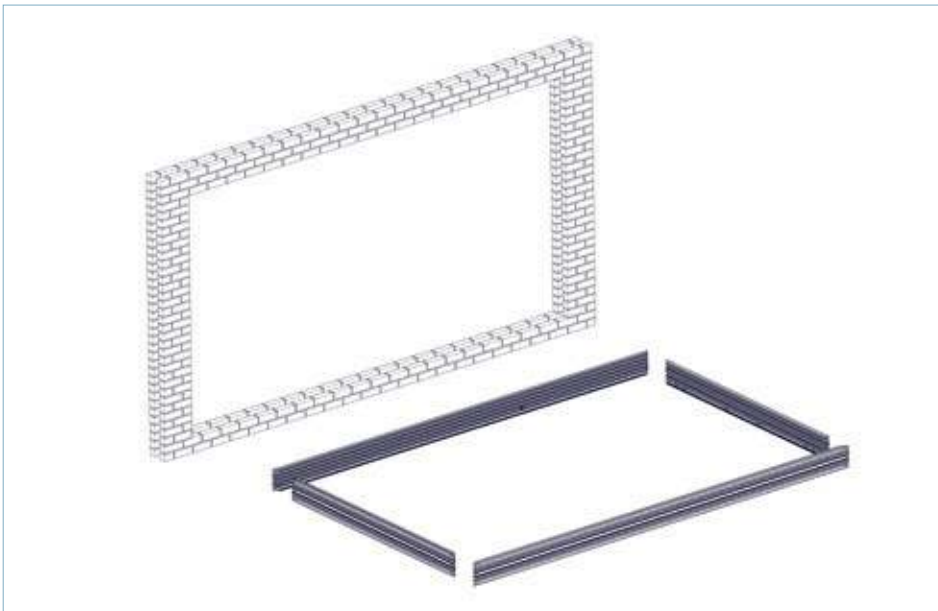

Lay frame profiles in front of aperture, being careful not to scratch the powder coat.

FIG 4

2. If applicable, join the top/ bottom frame profiles together


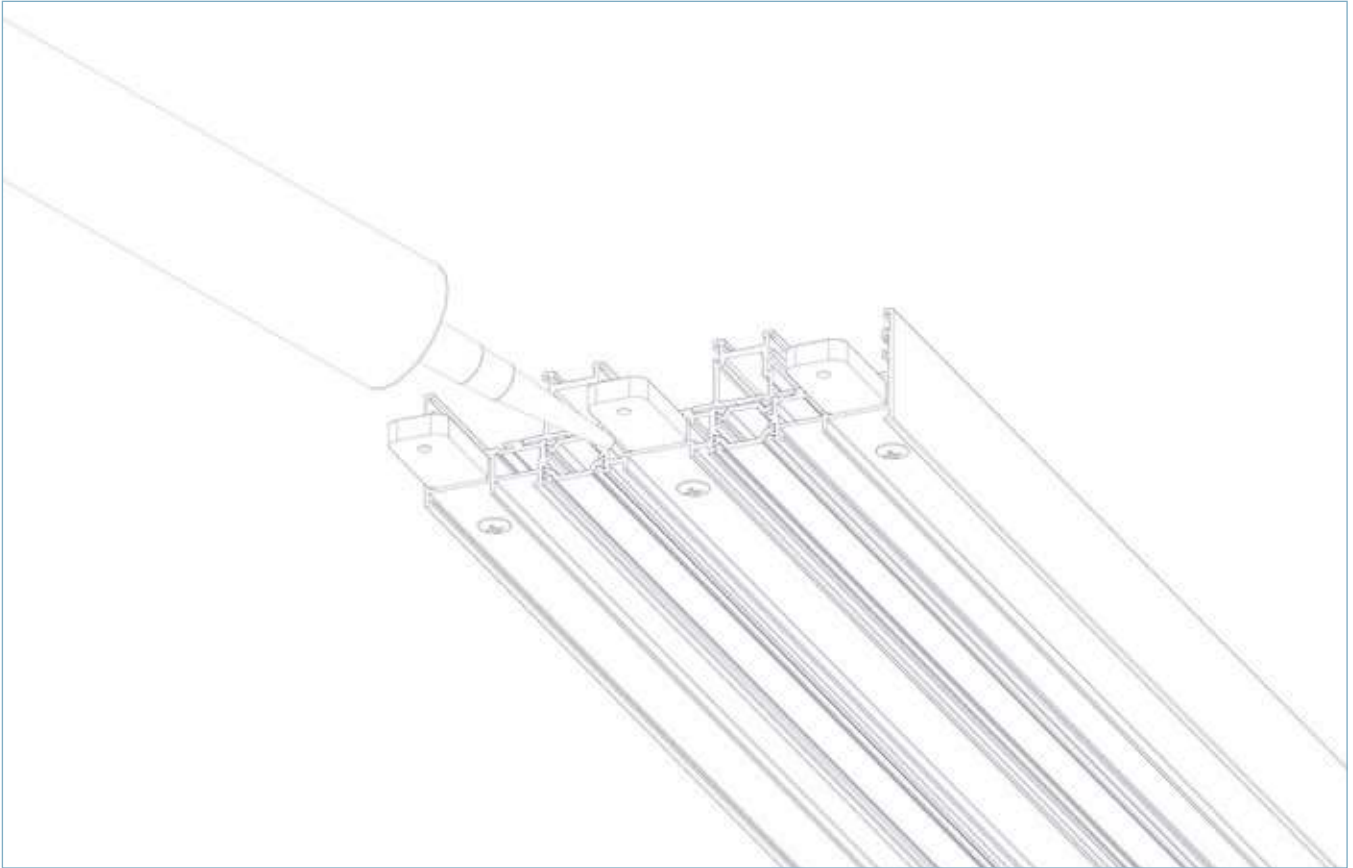



FIG 5

Apply suitable sealant on ends of profile and around the pre-inserted frame connectors.

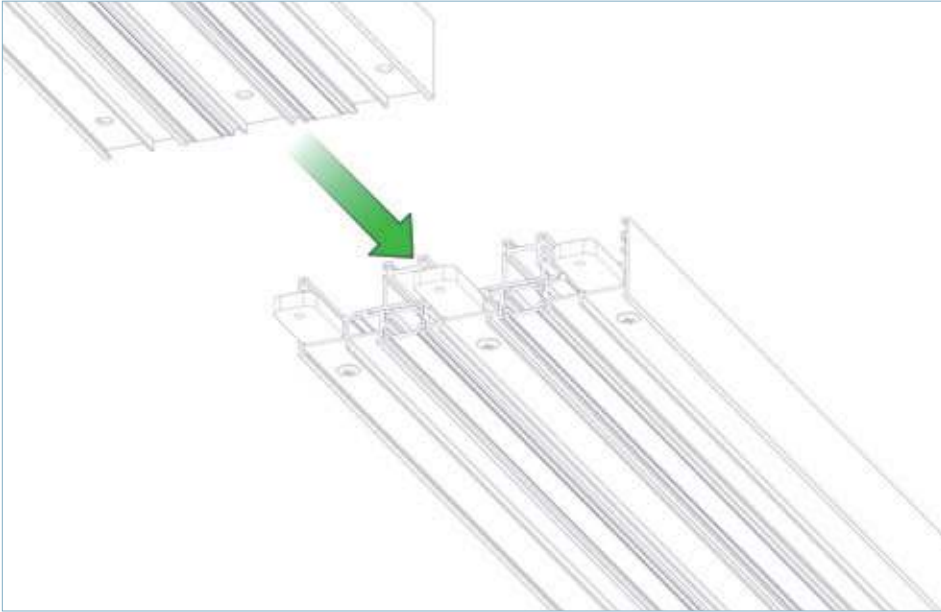

Connect the frame profiles together.

FIG 6

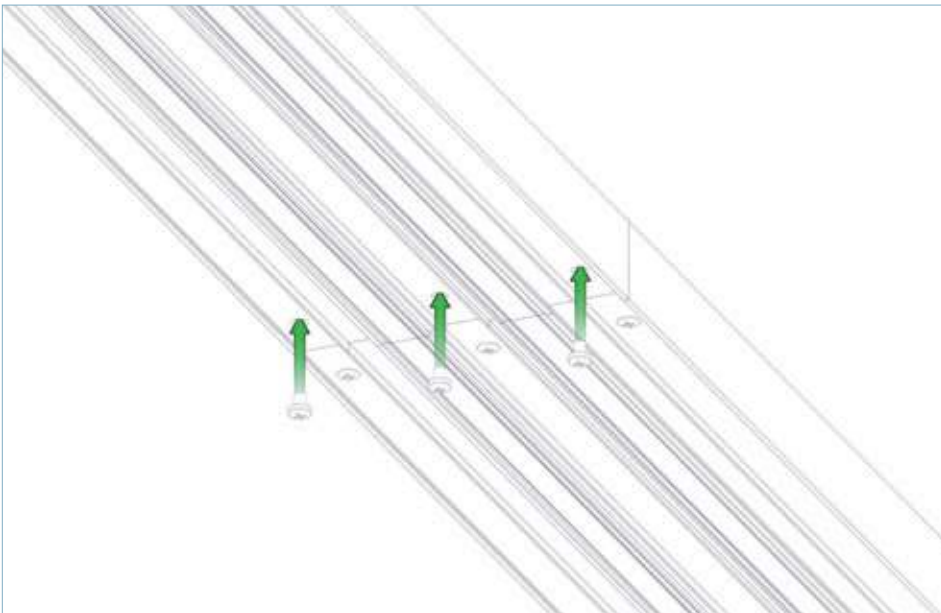

Fix the frame profiles together and repeat for remaining frame pieces.

FIG 7

### 3. Connect the jambs and bottom track


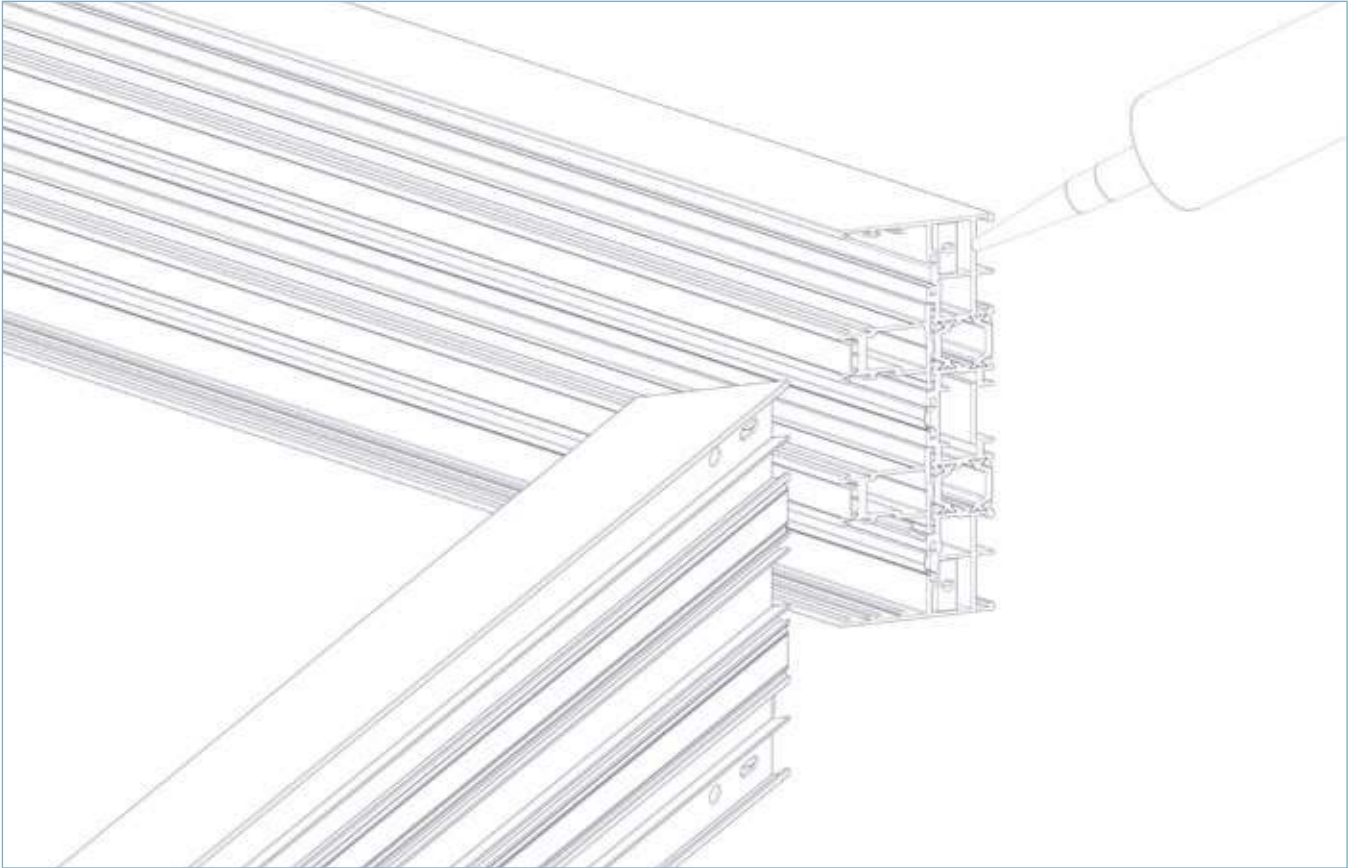



FIG 8

Apply suitable sealant to profile ends.

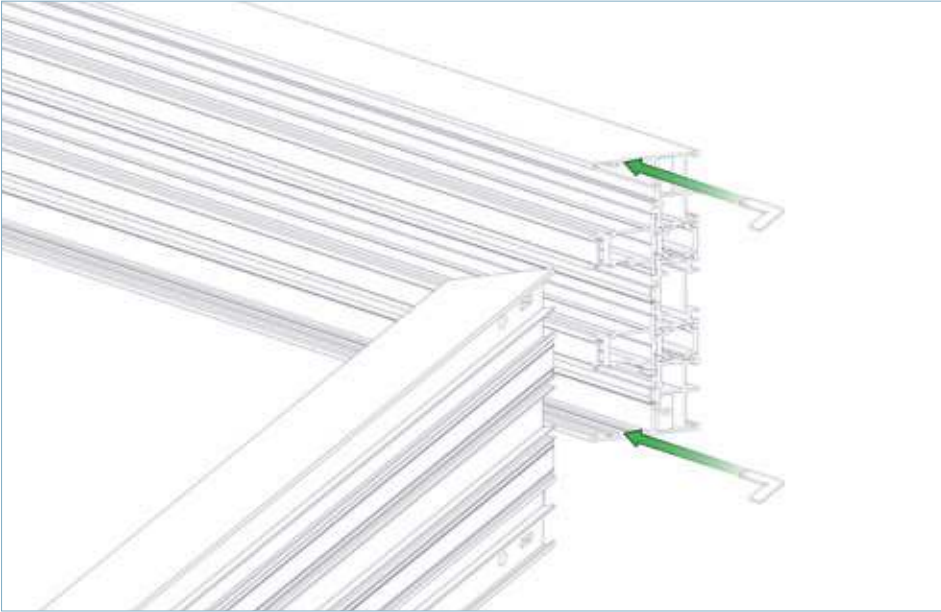


Insert alignment cleats to the frame. If set includes a fixed panel, one alignment cleat is required per corner and should be fitted in 25mm rebate.

FIG 9

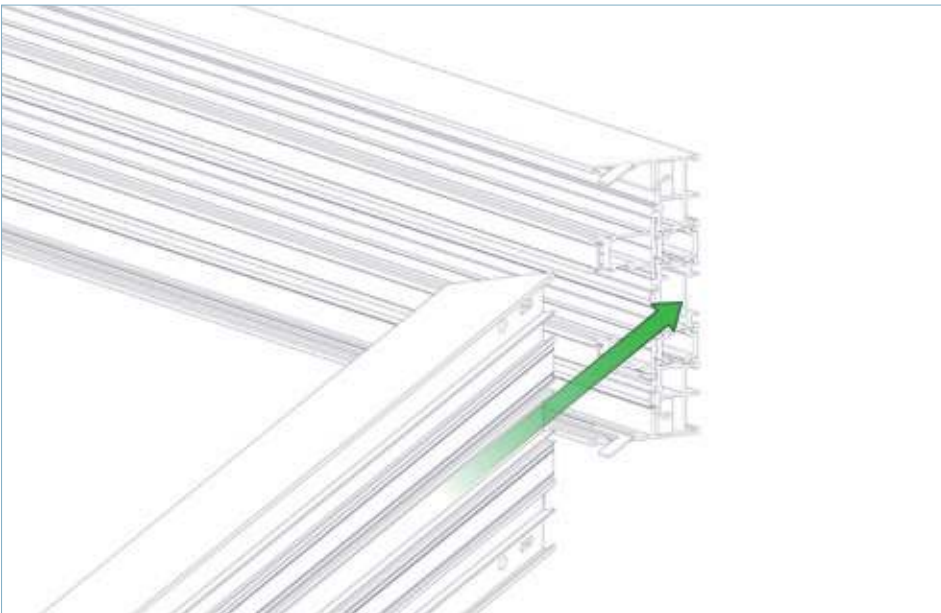

Join jamb to bottom track.

FIG 10

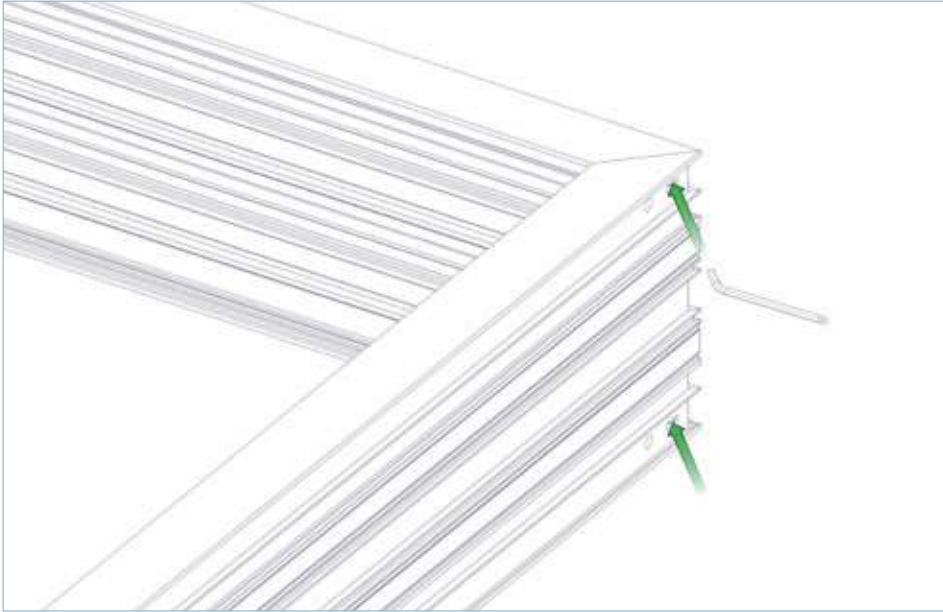

Tighten the cleat join with a 4mm Allen Key and screws provided.


FIG 11



Check joint, remove excess sealant and repeat process for second jamb.

FIG 12

4. If applicable, connect the fixed interlocker (only applicable for sets with fixed panels)

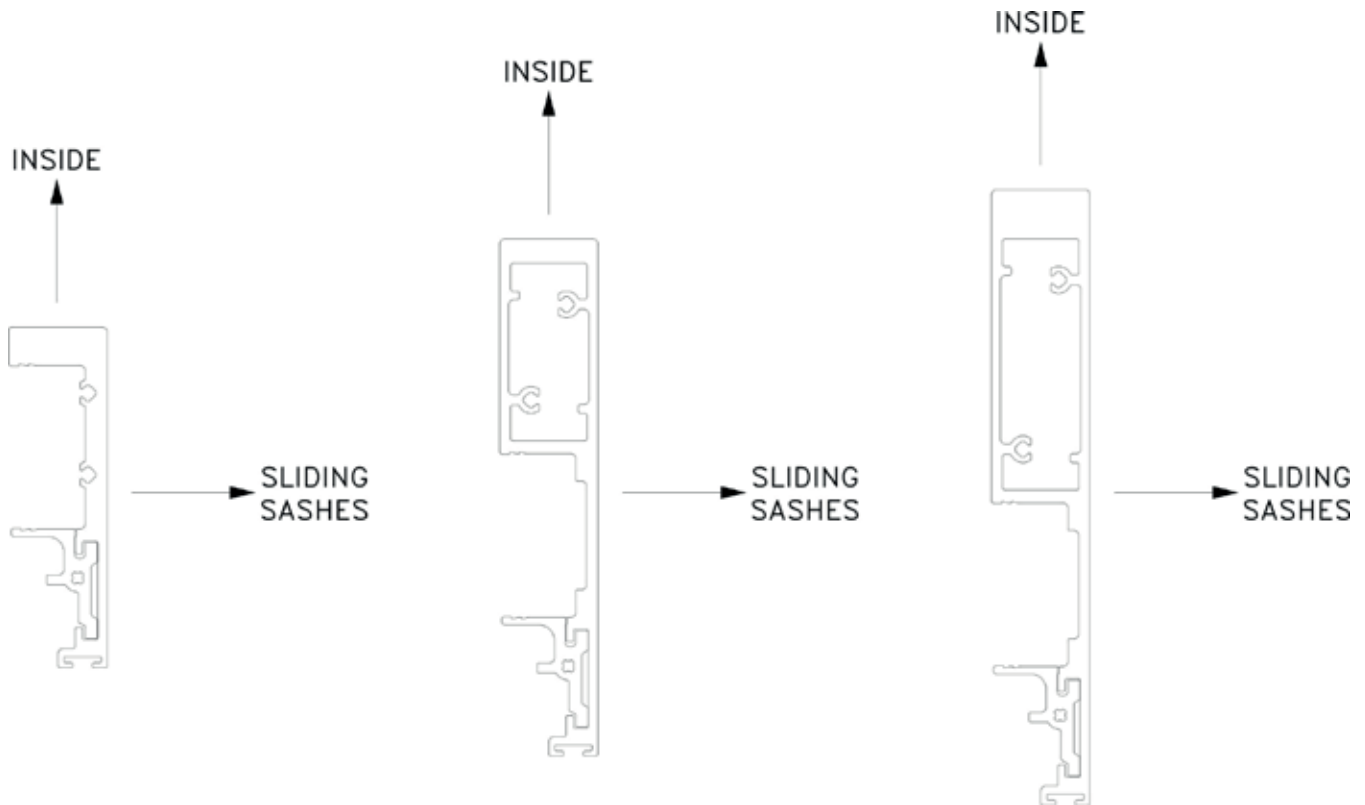

Note: Flush fixed interlockers do not require end plates.


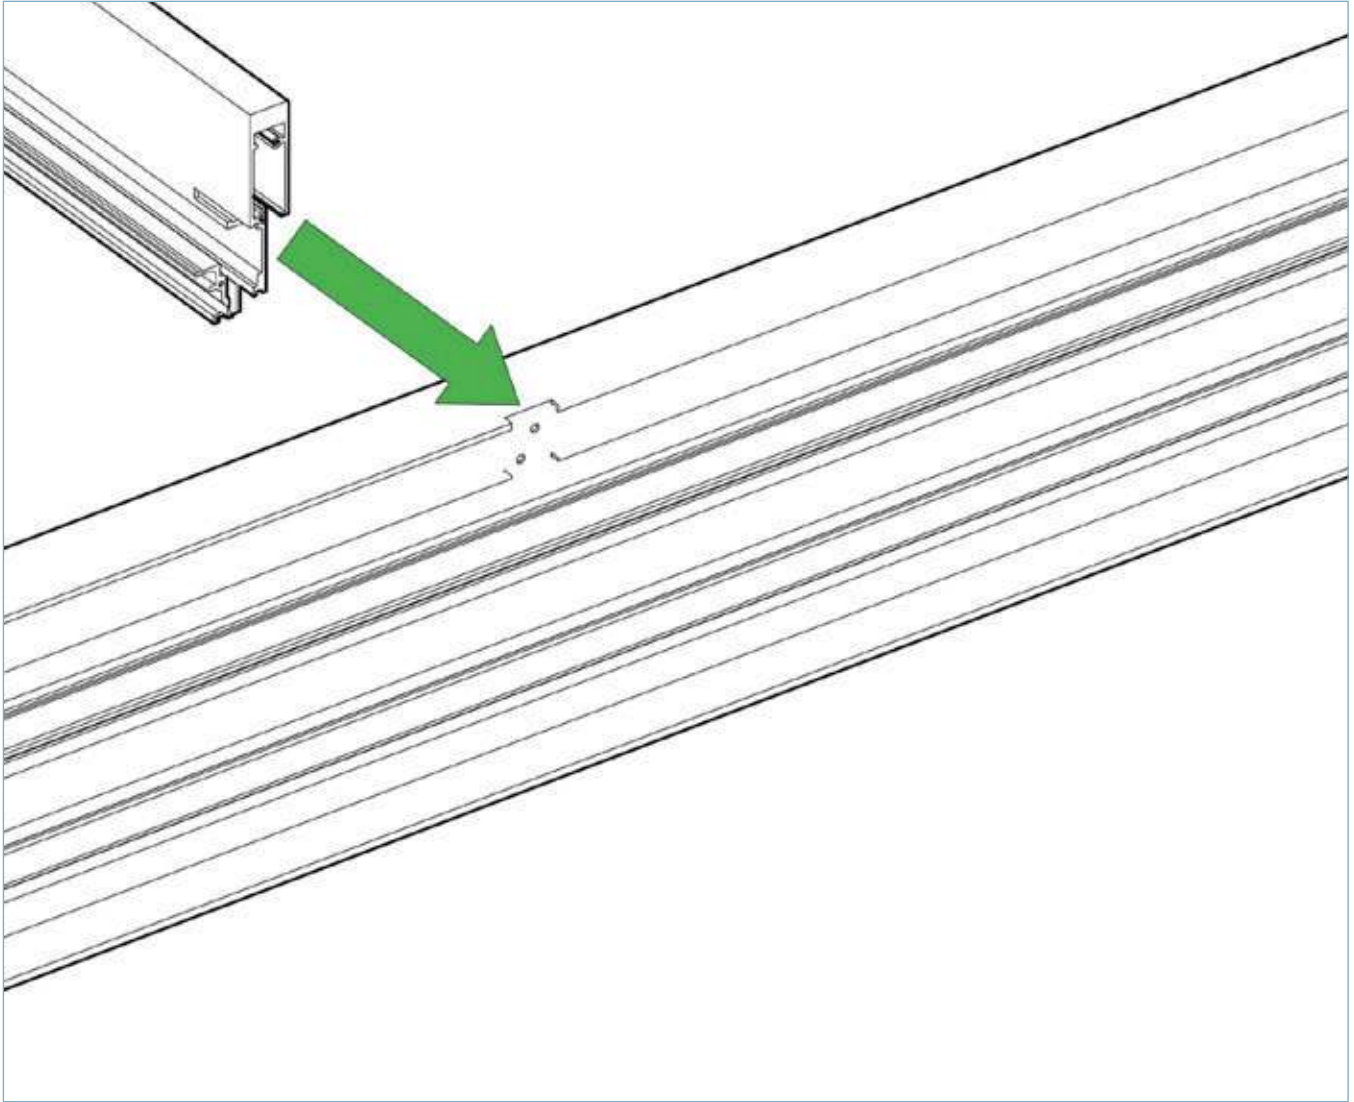


FIG 13


Align fixed interlocker to notch on bottom track. Ensure profile position is as per sections above.



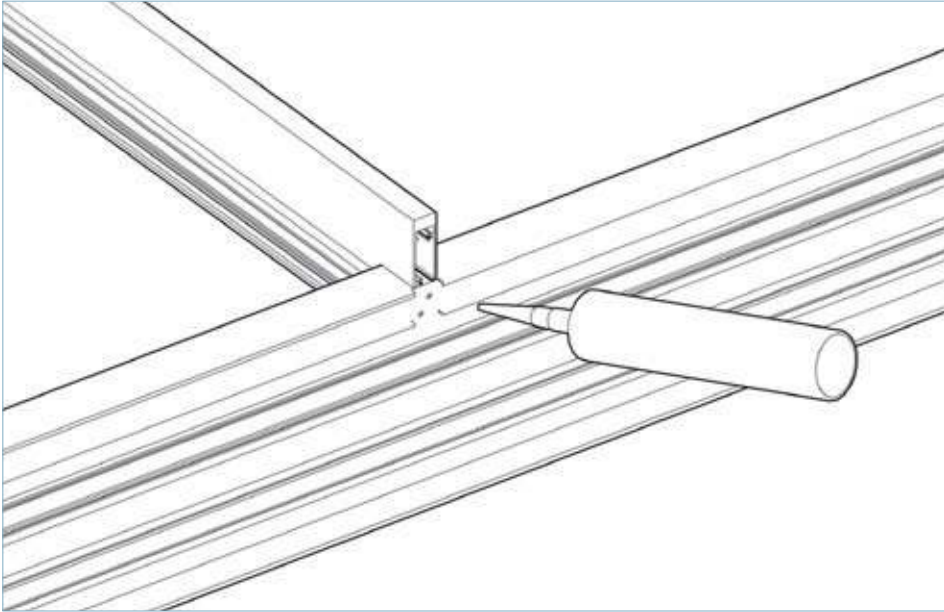


Seal holes with a suitable sealant.

FIG 14

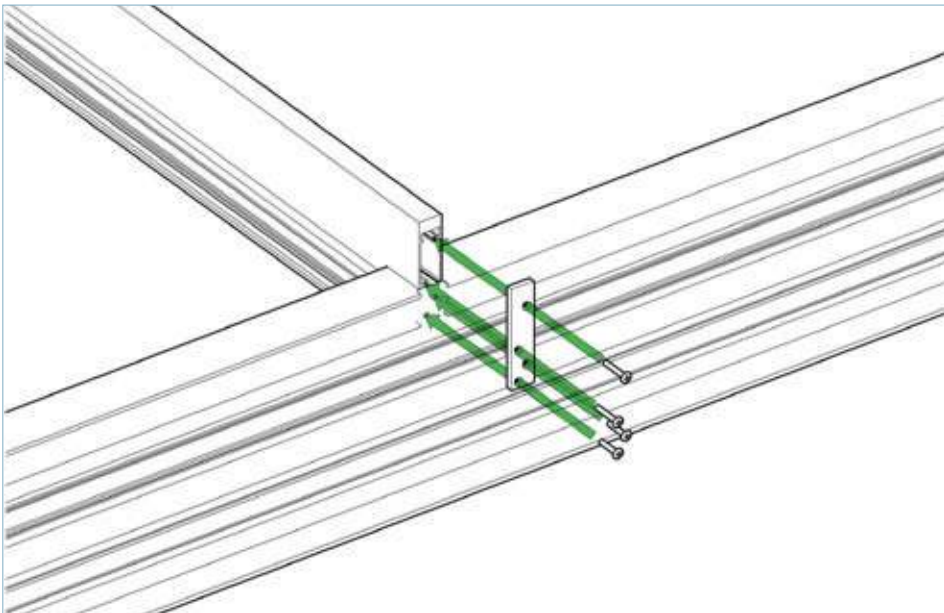


Fix interlocker end plate with 3.9 x 16mm screws. Repeat process at both ends of profile.

FIG 15

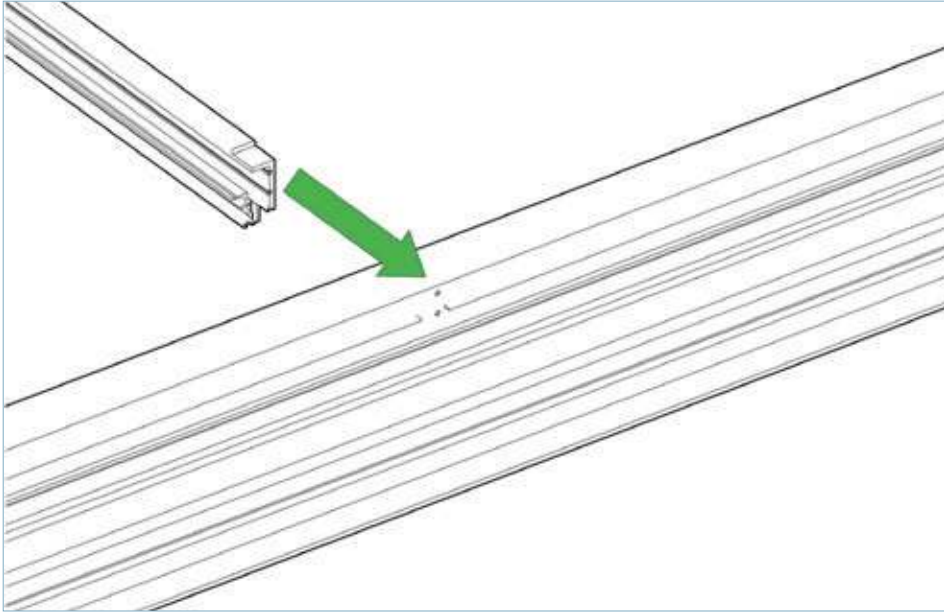


Align flush fixed interlocker to notch on bottom track. Ensure profile position is as per sections above.

FIG 16

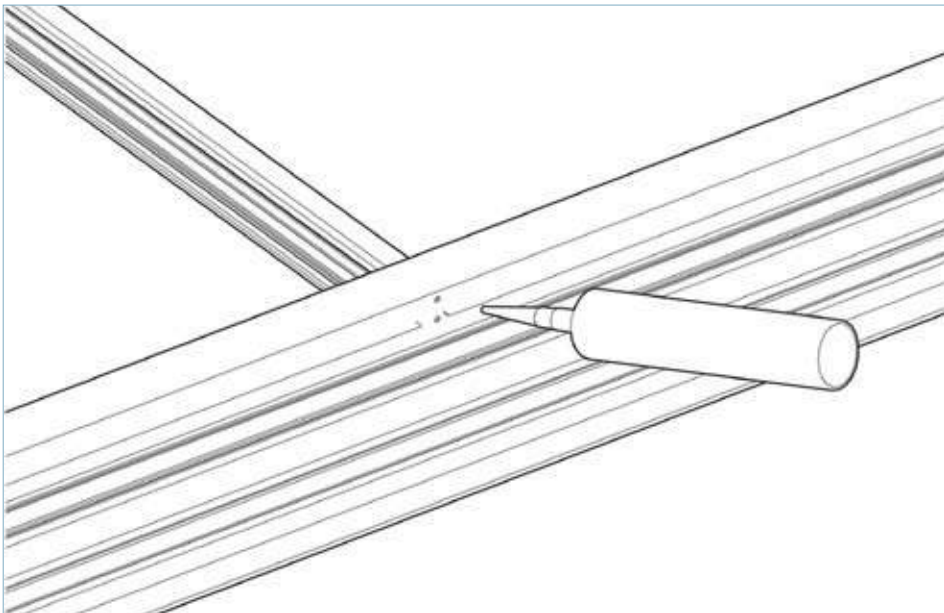


Seal holes with a suitable sealant.

FIG 17

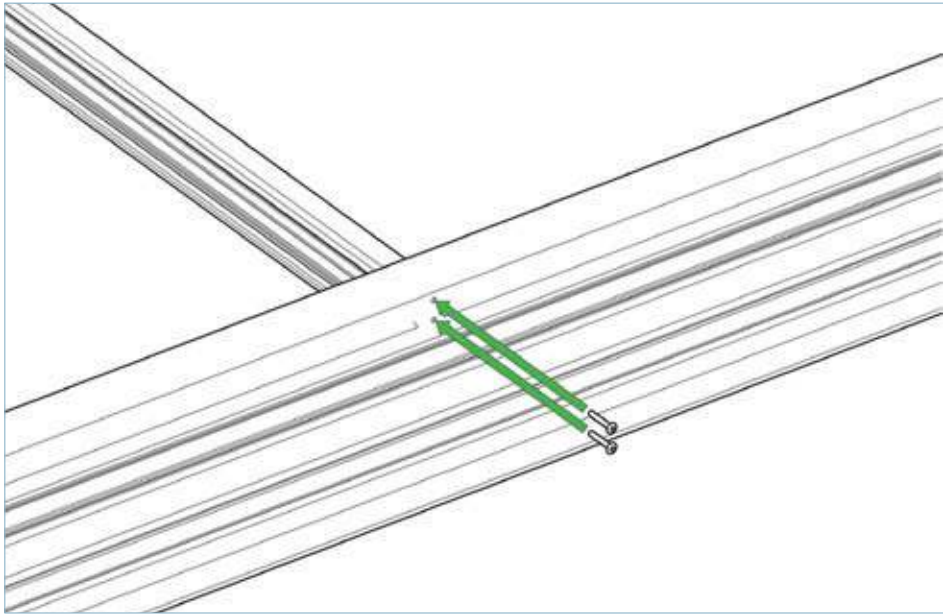

Fix interlocker in place with 3.9 x 16mm screws. Repeat process at both ends of profile.

FIG 18

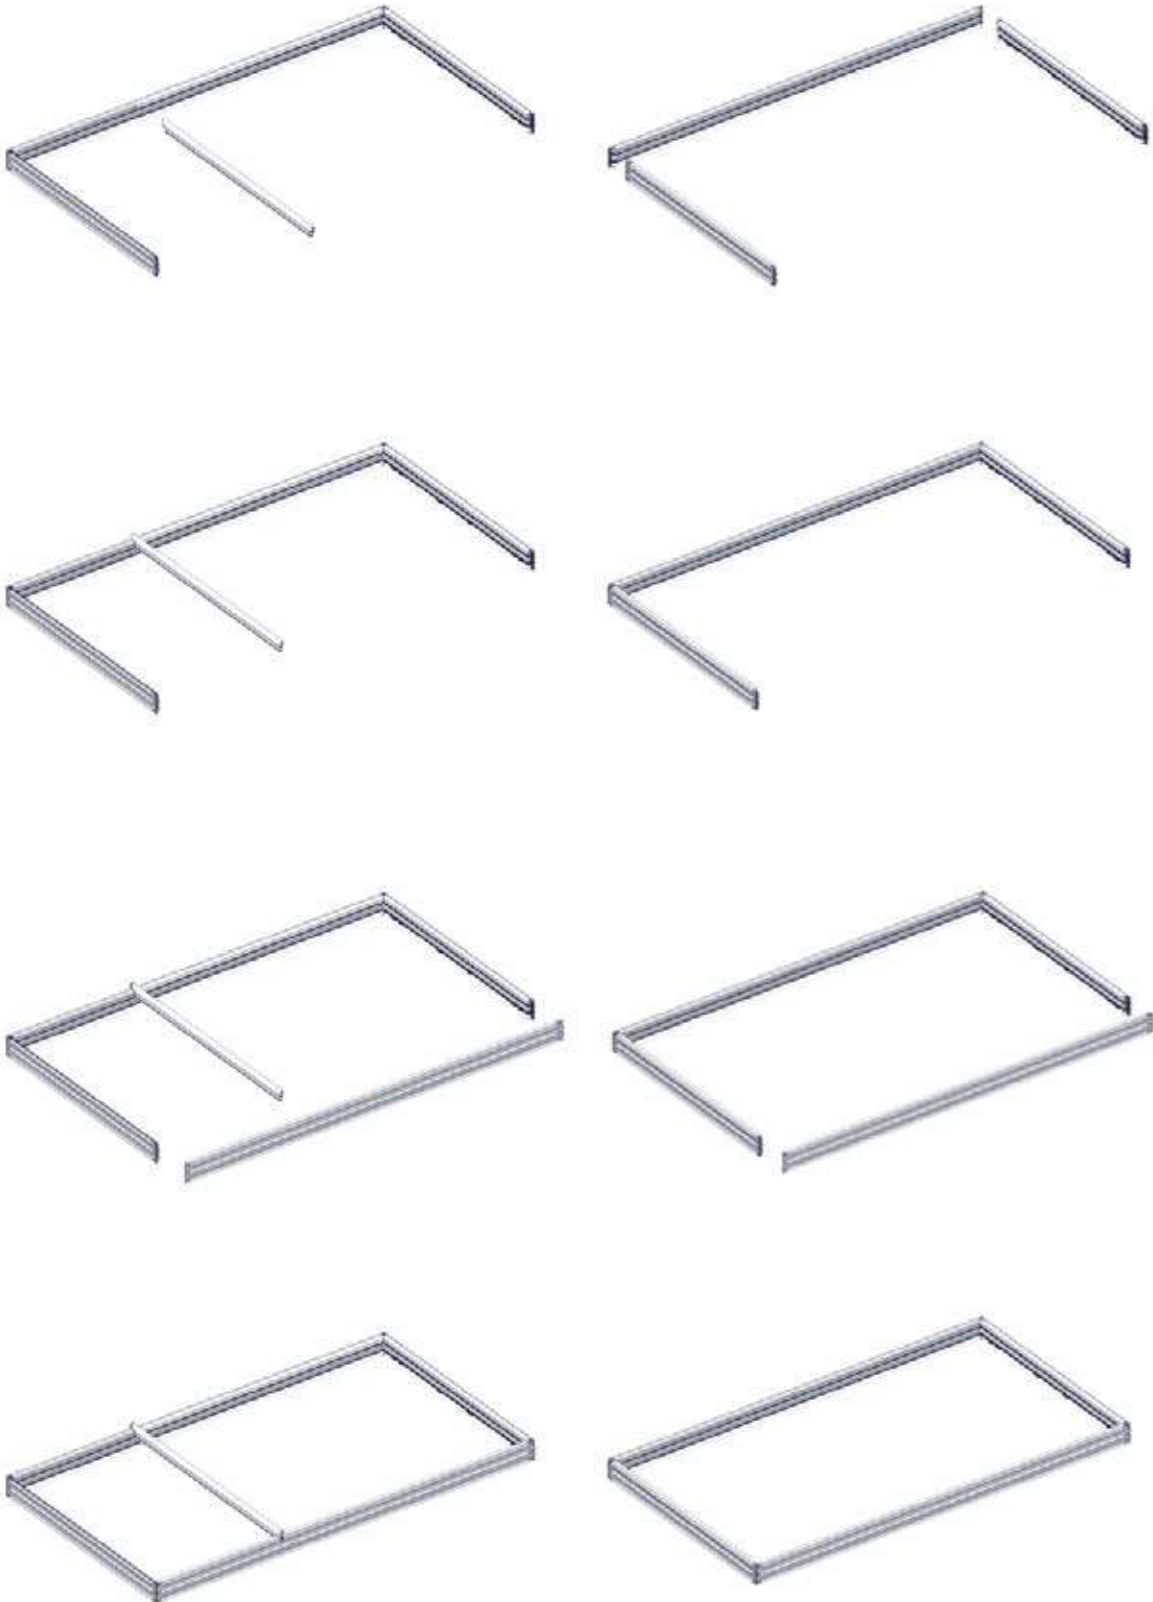

## 5. Lift the frame into the aperture

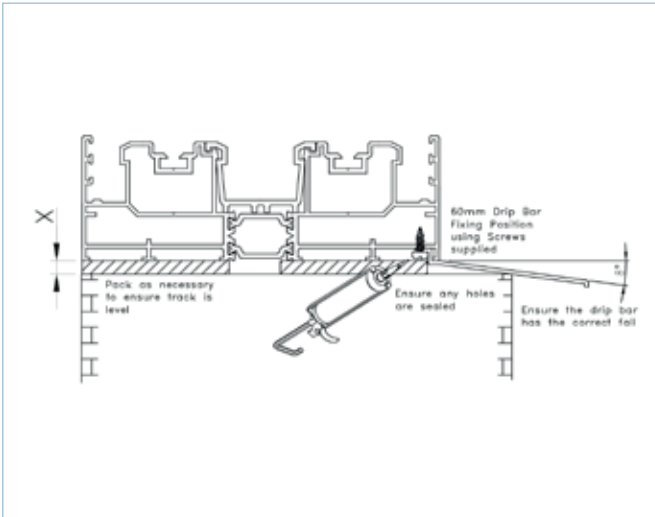


FIG 20

If using a drip bar, ensure that when fitted, all pre-drilled holes are filled with silicone before being fixed into position with the screws supplied.

A consistent bead of silicone is required between the drip bar and the track to ensure a complete seal.



FIG 21

Lift frame into the aperture, ensuring drainage caps are situated externally.


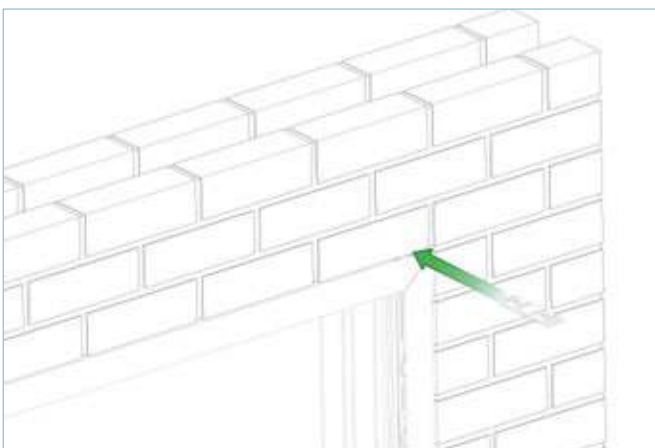


FIG 22

Insert packers above both jambs.

## 6. Fix the bottom track

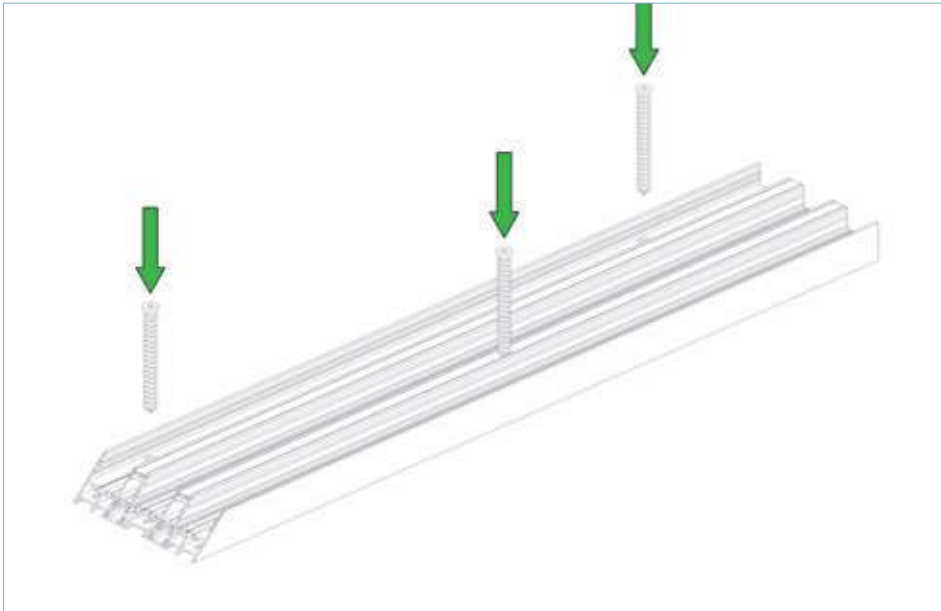

Where possible, fixing points should be on both sides of the frame, in a zig-zag pattern.

FIG 23

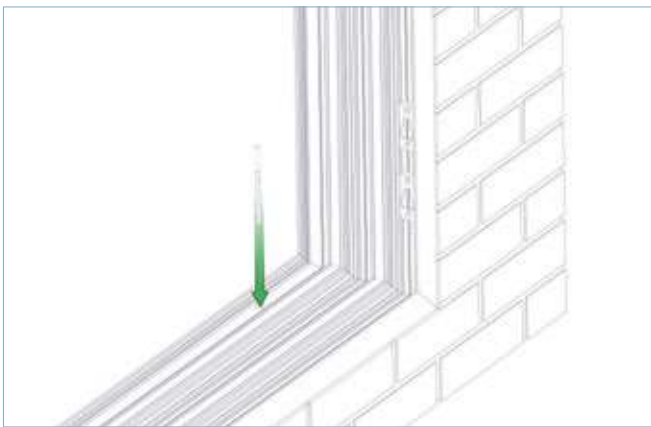


FIG 24

Use an HSS bit to drill and countersink an appropriate sized fixing hole through the frame. This should be no more than 150mm from the external corner of the frame.


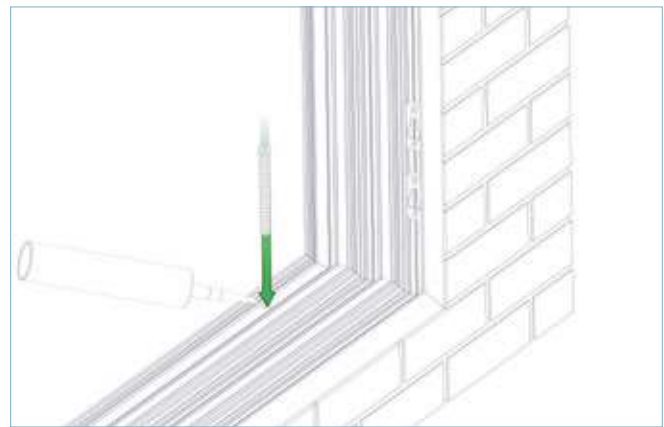


FIG 25


Insert suitable sealant to fixing hole, then screw preferred fixing in place. Repeat process along the bottom track, ensuring fixings are within 900mm intervals.

## 7. Level and fix both jambs

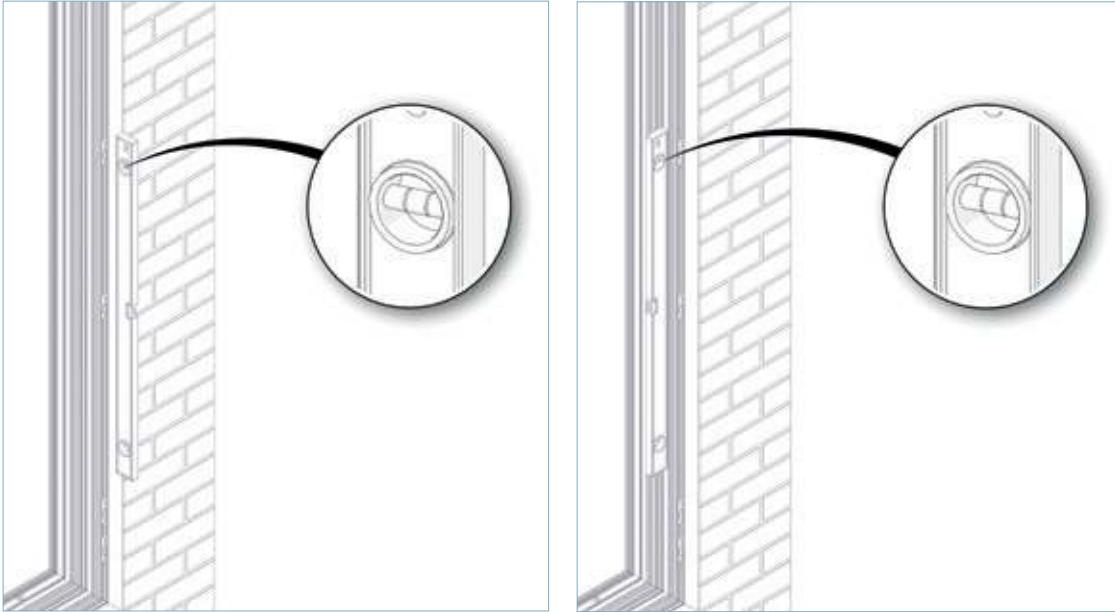


Level out jambs in both directions.

FIG 26

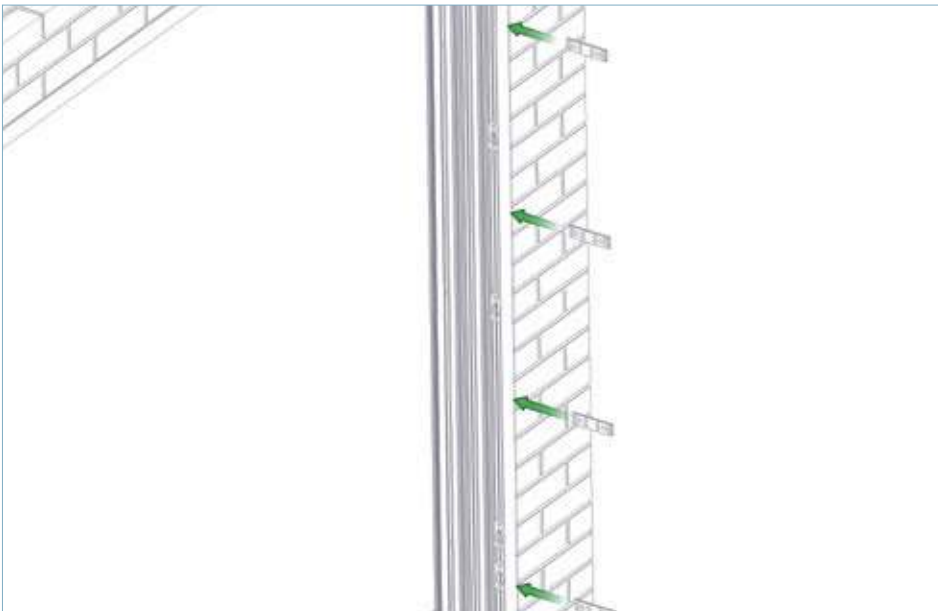


Pack out jambs accordingly when level.

FIG 27

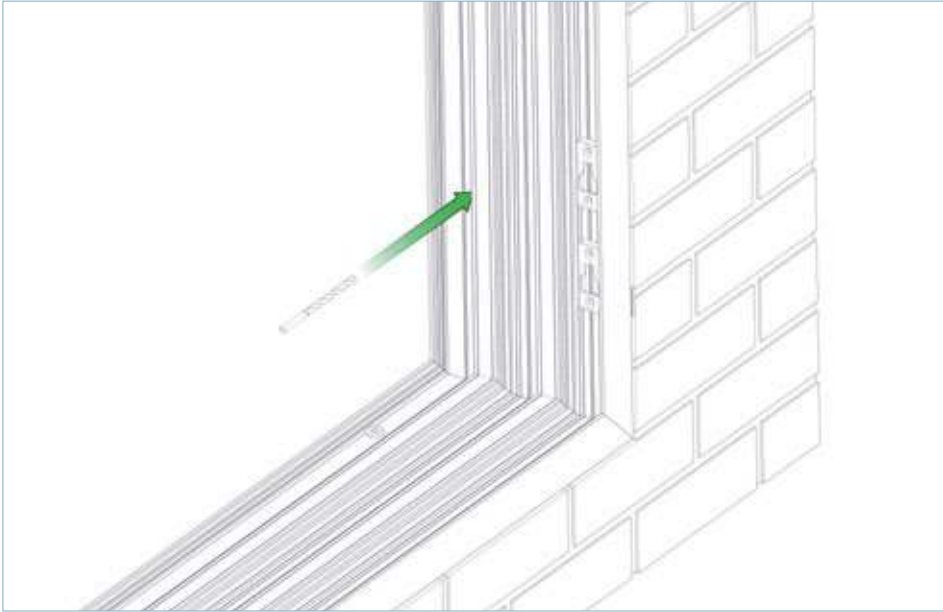

Use an HSS bit to drill and countersink an appropriate sized fixing hole through the frame. This should be no more than 150mm from the external corner of the frame.

FIG 28

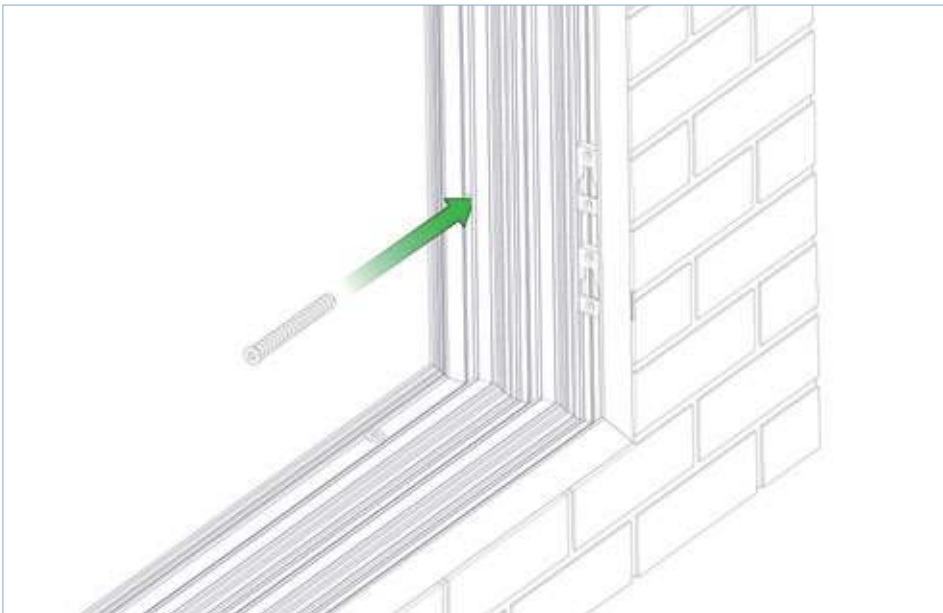

Screw preferred fixing in place. Repeat process along the jambs, ensuring fixings are within 600mm intervals.

FIG 29




## 8. Fix the top track




FIG 30

Use an HSS bit to drill and countersink an appropriate sized fixing hole through the frame. This should be no more than 150mm from the external corner of the frame.

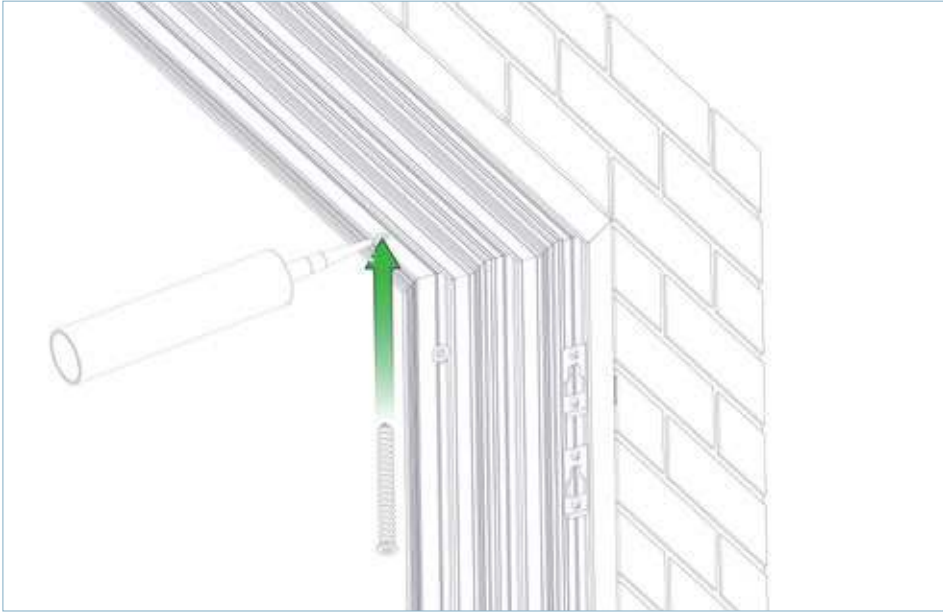


Insert suitable sealant to fixing hole, then screw preferred fixing in place. This must be done at both ends of the top track.

FIG 31

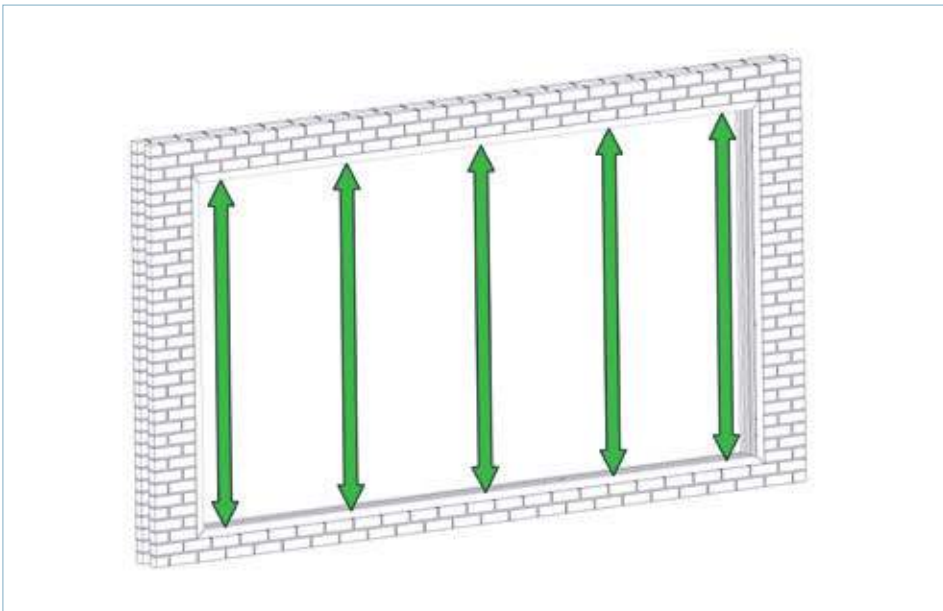


Accurately measure the internal frame dimensions.

FIG 32

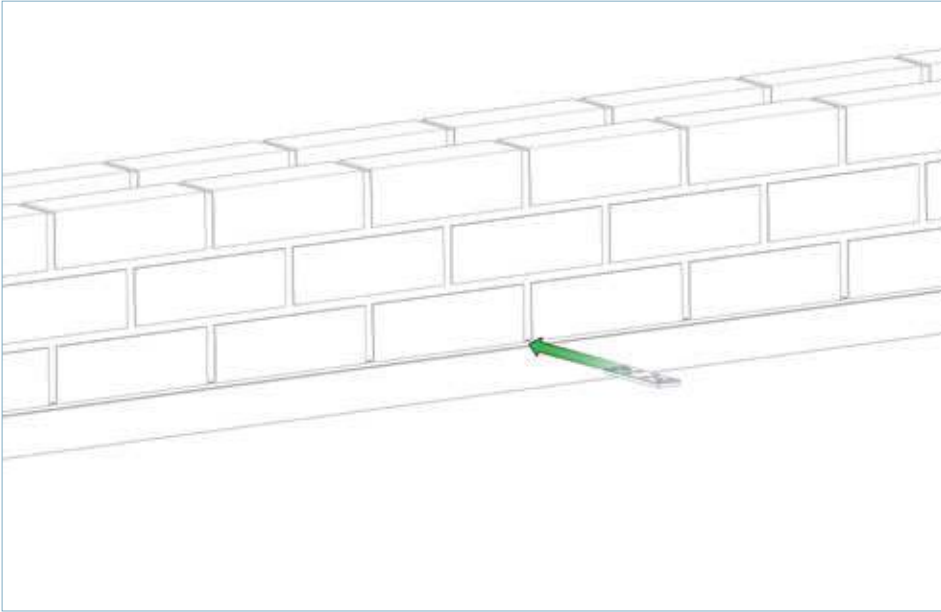


Pack out across the top track for consistent internal frame sizes. Ensure the track doesn't bow in any direction.

FIG 33

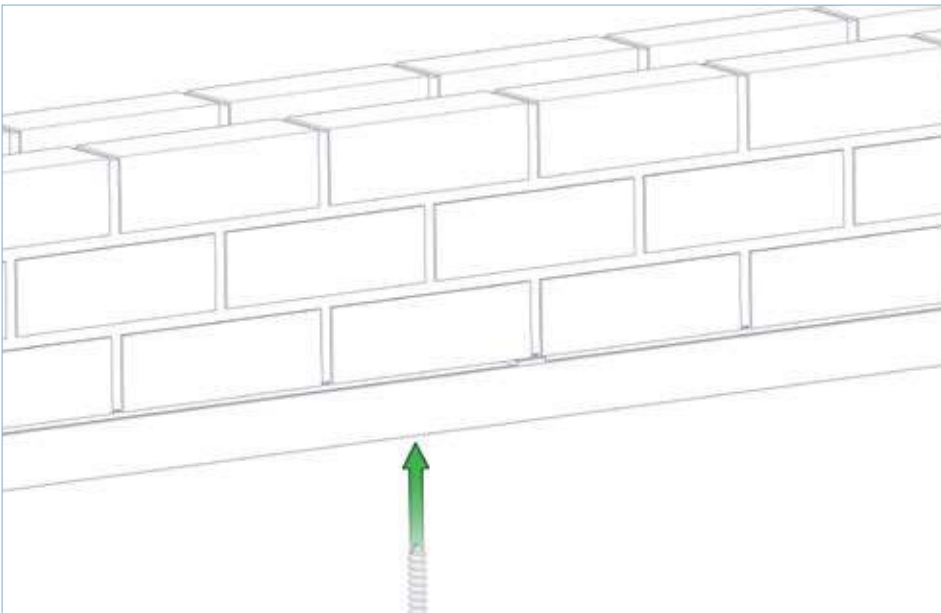


Use an HSS bit to drill and countersink an appropriate sized fixing hole through the frame. Insert sealant to fixing hole, then screw preferred fixing in place. Repeat process along the top track, ensuring fixings are within 900mm intervals.

FIG 34

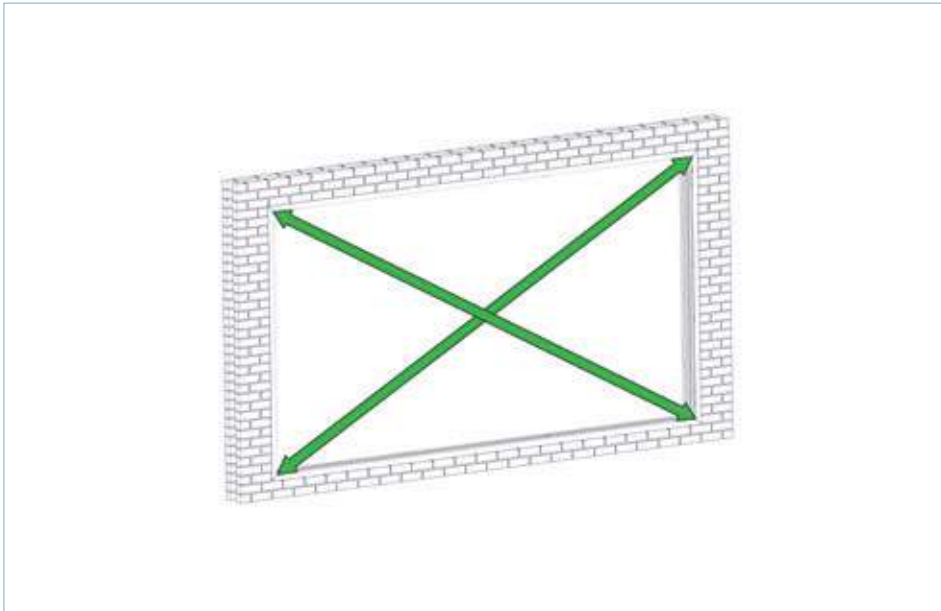

Measure diagonally from corner to corner to check the frame is square.

FIG 35

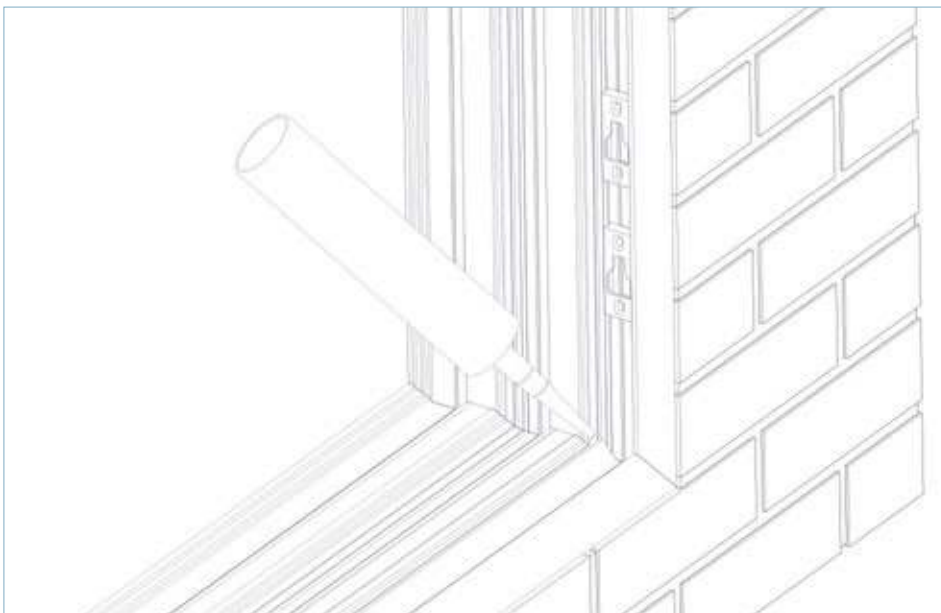


Seal the drainage isolator in place, ensuring ends of profile are sealed with edge of frame.

FIG 36


## 9. Install the sash

Install sashes, working from inside to outside.

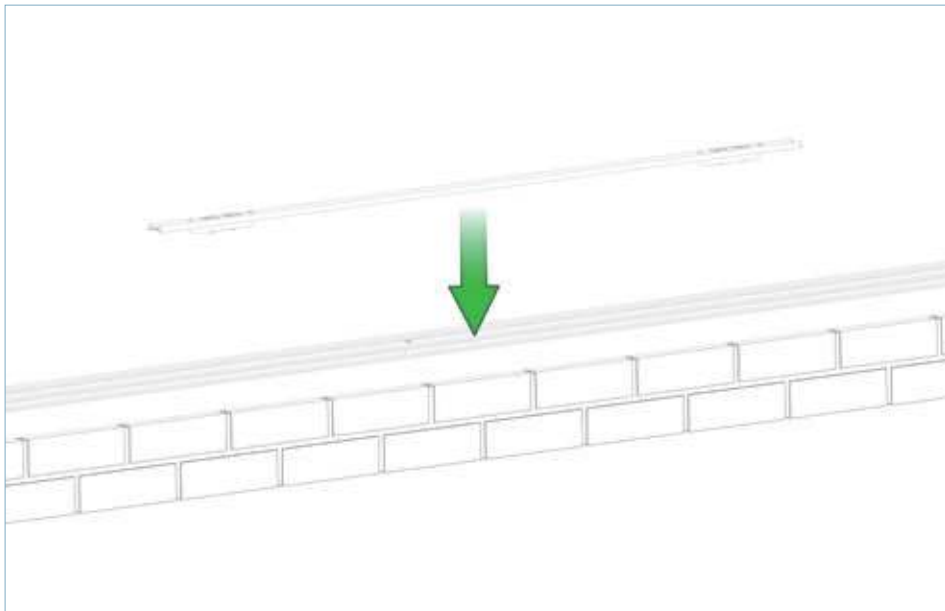


Insert all running gear profiles into necessary track channels.

FIG 37

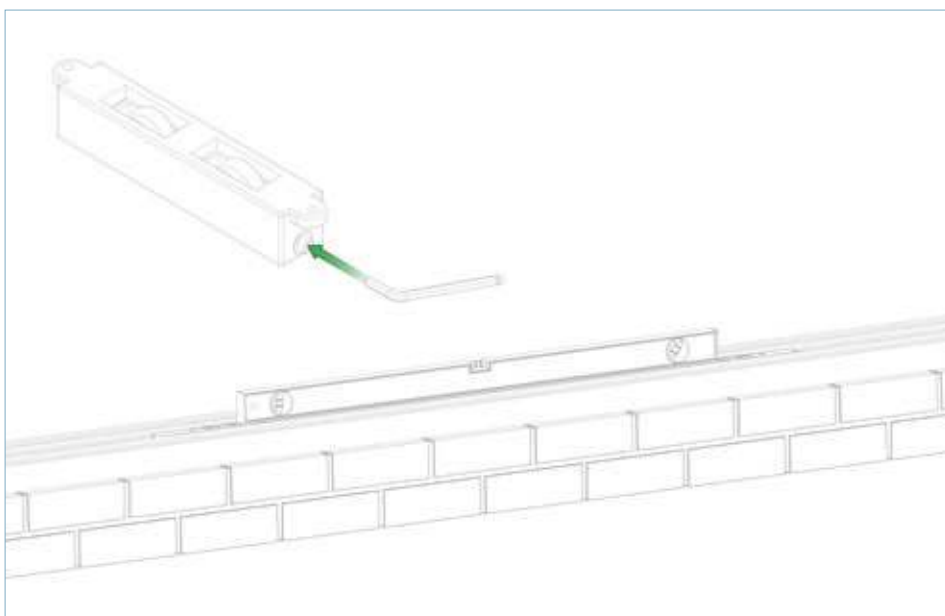


Level the running gear profiles by adjusting the roller height with a 3mm Allen Key.

FIG 38

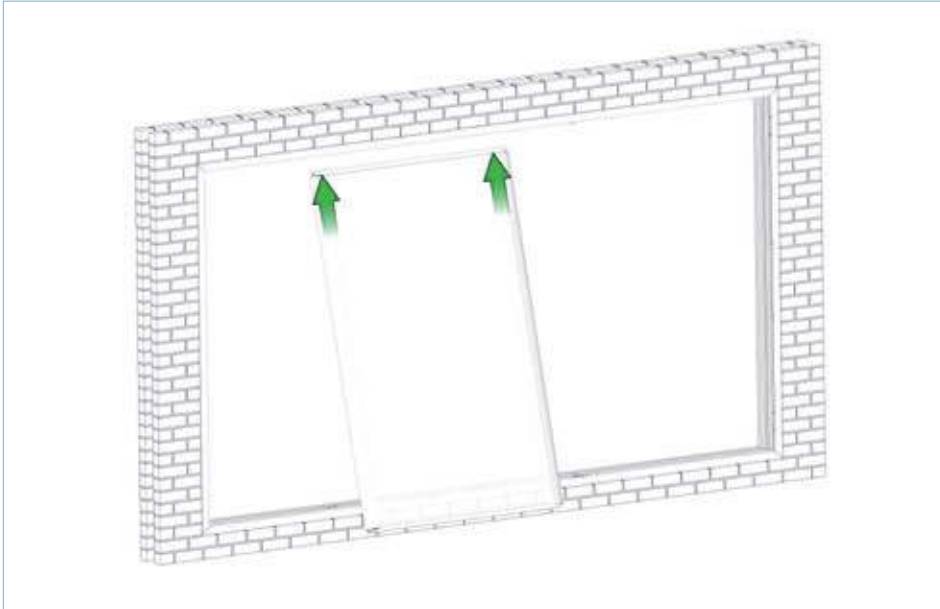


Insert top of sash into top track channel.

FIG 39

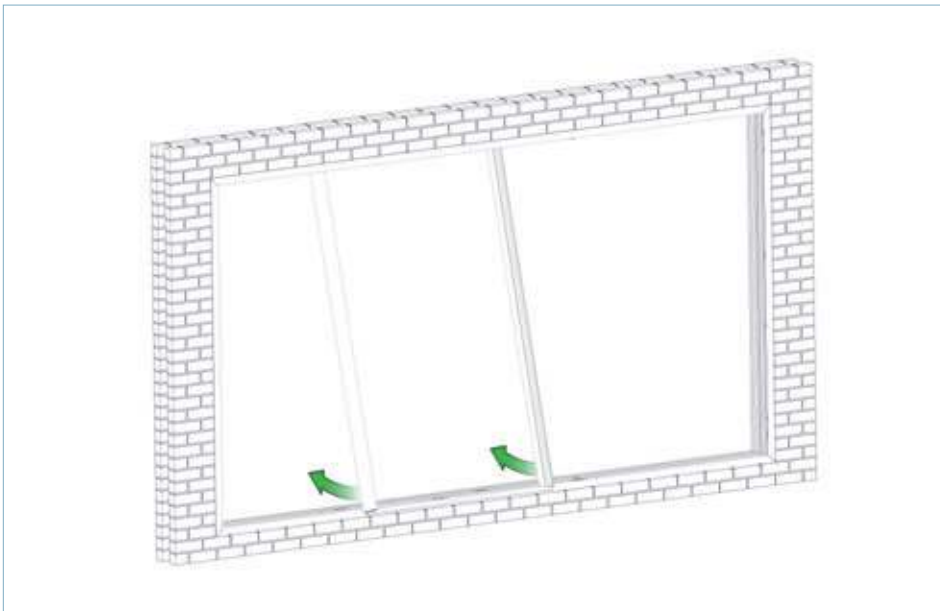


Swing bottom of sash above running gear.

FIG 40

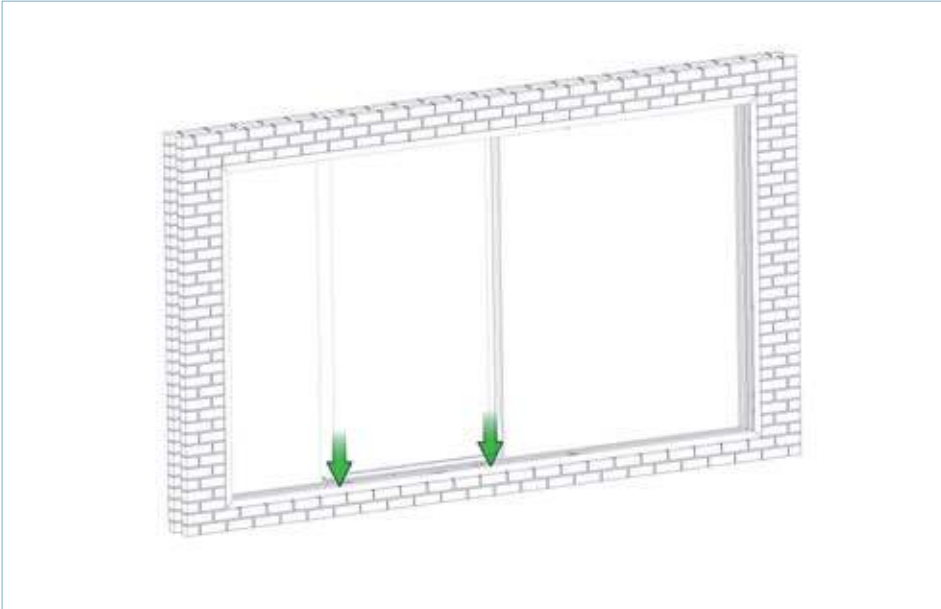


Drop sash on to running gear, ensuring the running gear sits within the bottom of the sash.

FIG 41

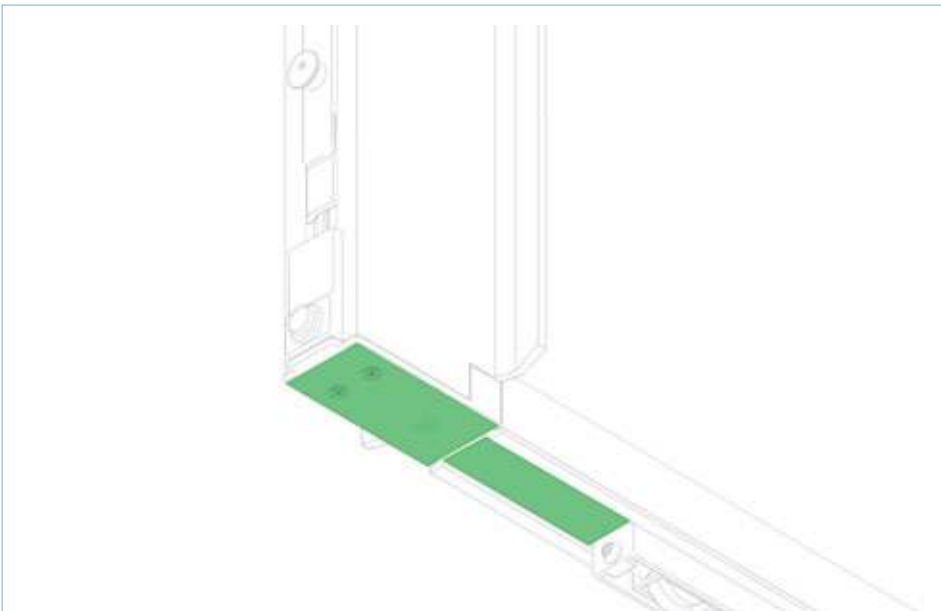

Check to ensure bottom of sash and running gear components are flush at both ends.

FIG 42

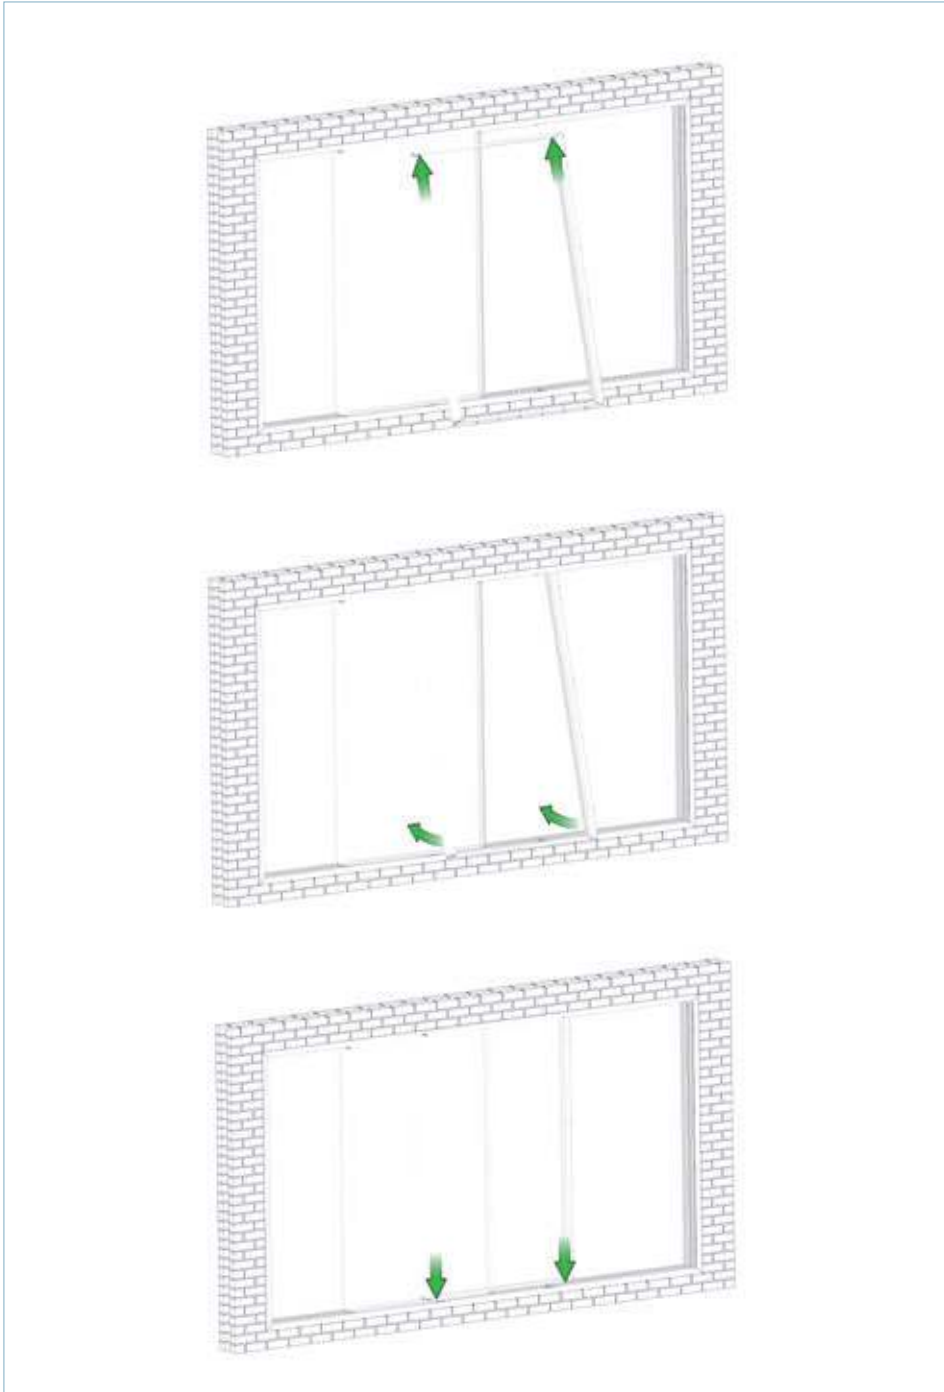

If applicable, repeat process for remaining sashes.

FIG 43



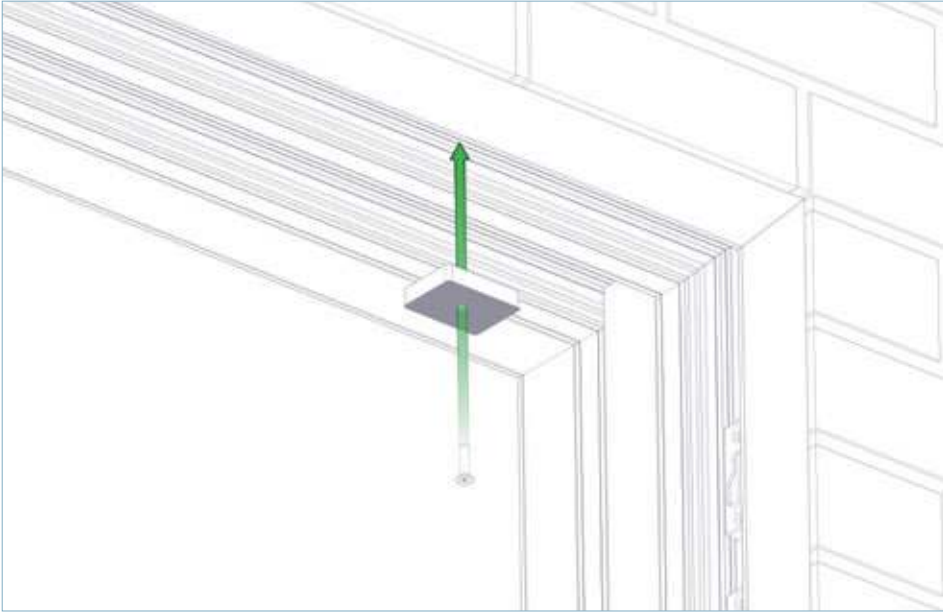


FIG 44

Fix anti-lift blocks above each sash corner when the sash is in the closed position. Fix using 3.9 x 25mm screws and position no more than 60mm from the external corner of the sash.


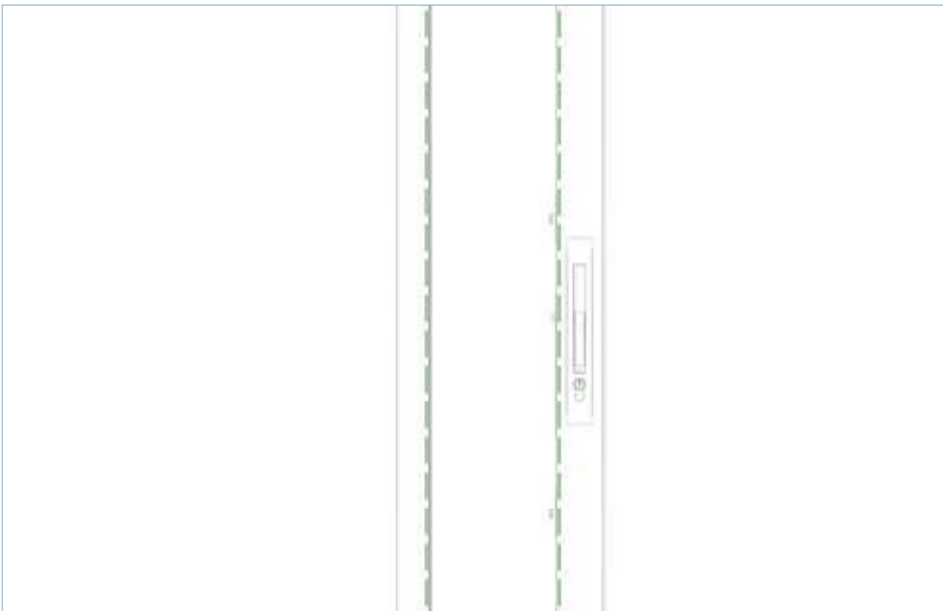


FIG 45

Level the lockstile to ensure the sash is parallel to the frame. Repeat for all opening sashes to ensure the interlockers line up correctly.

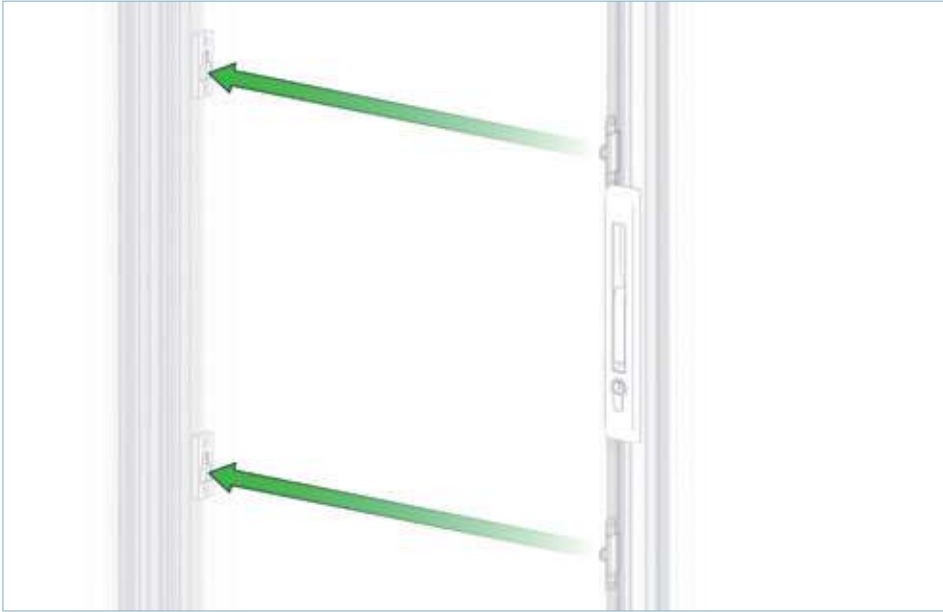


Align centre keeps with corresponding locking points (situated directly above and below handle).

FIG 46



Working from bottom to top, adjust keep positions if necessary. Keeps can be packed out using the 0.5mm and 2mm packers supplied. Adjust keeps until the handle engages correctly, and the key in the lock cylinder turns smoothly.

FIG 47

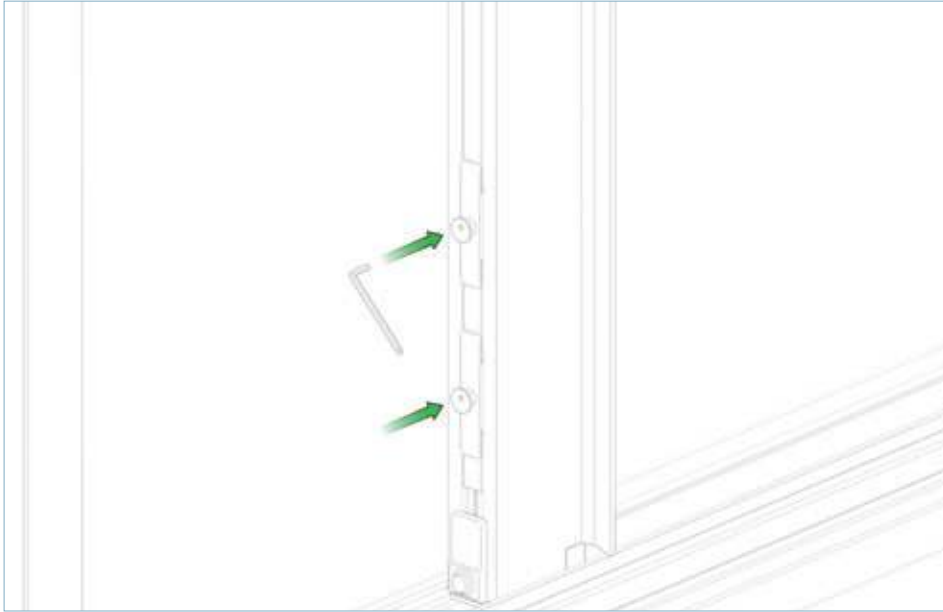

If more adjustment is required, use a 3mm Allen Key to adjust the locking point.


FIG 48

# 10. If applicable, install the fixed panel




Pack out as appropriate.

FIG 49

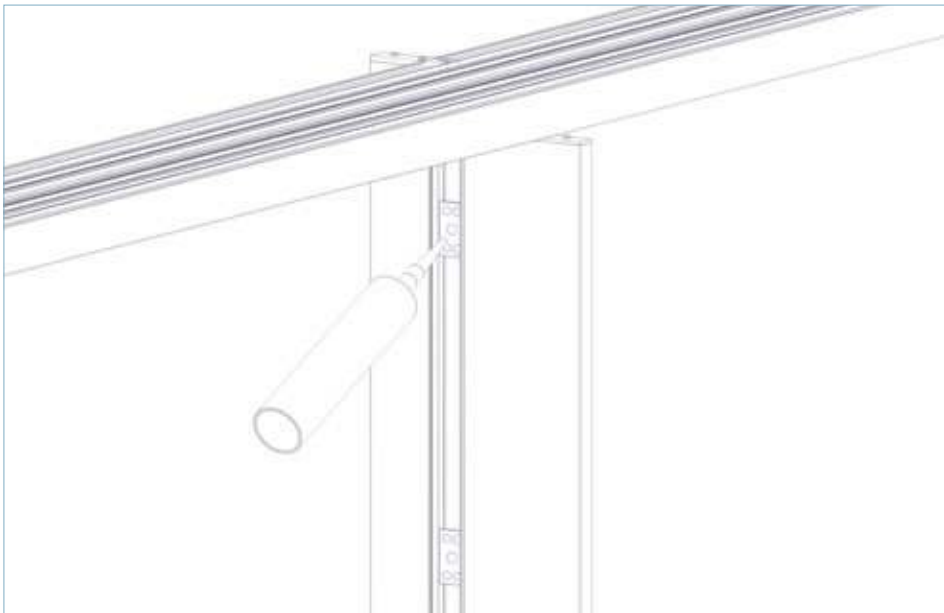


Apply supplied structural sealant around each packer.

FIG 50

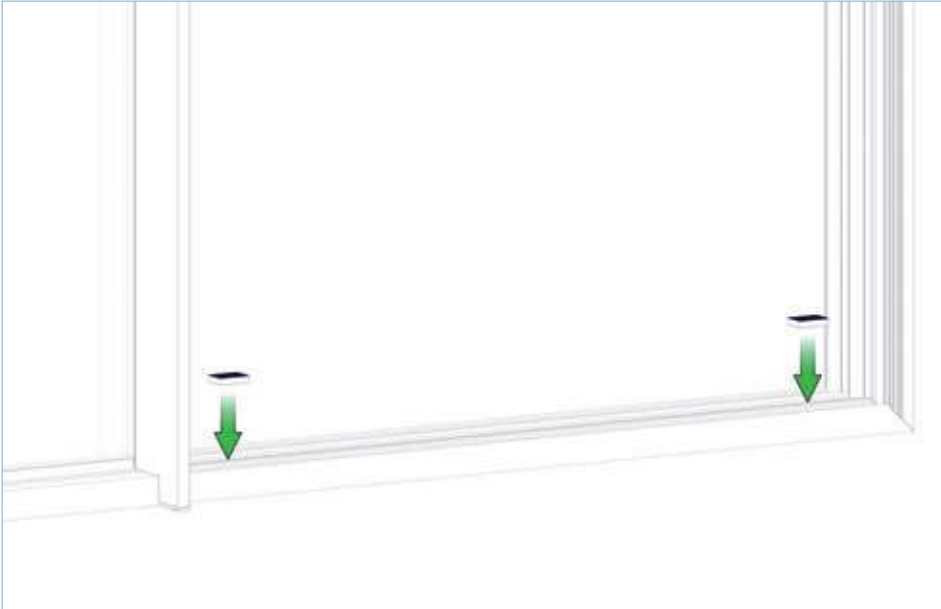


Place 10mm anti-lift packers into track channel.

FIG 51

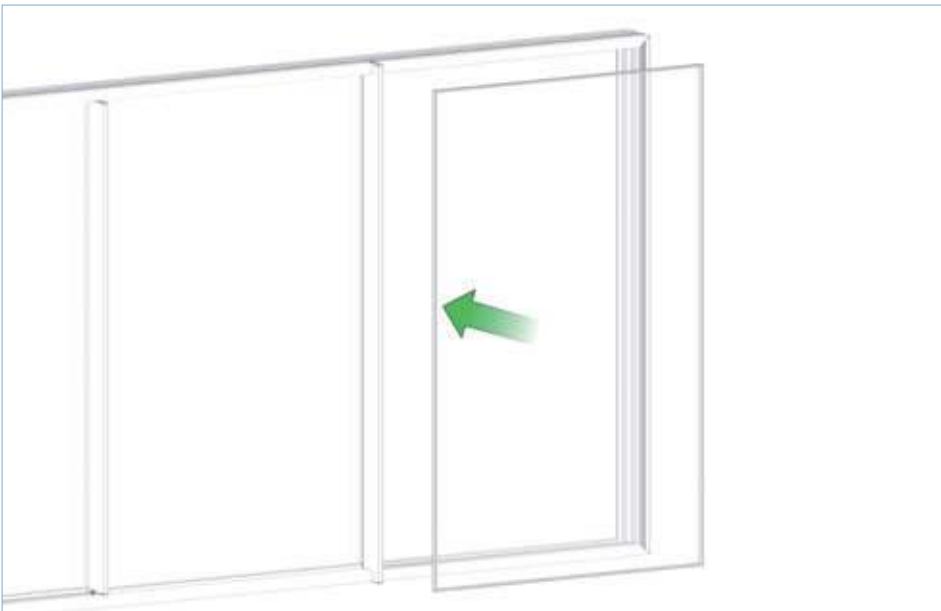

Insert glass into frame and slide over on to pre-applied structural sealant in interlocker. Pack out below glass, so it is central in the frame.

FIG 52

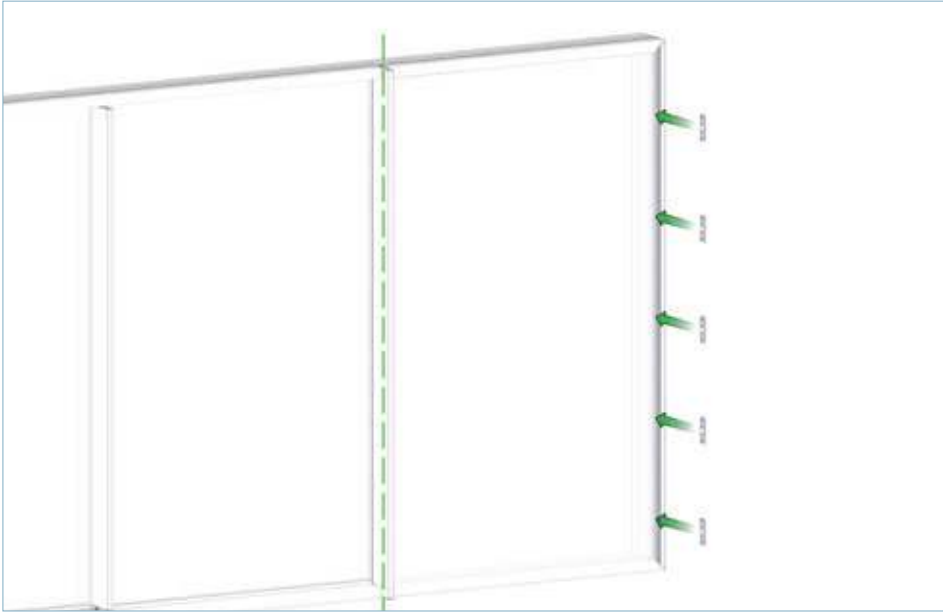


Use a straight edge or long level along the fixed interlocker to ensure straightness. Pack out accordingly between edge of glass and jamb.

FIG 53



Secure frame bead in place. First clip top and bottom of bead, then proceed to clip in the centre.

FIG 54

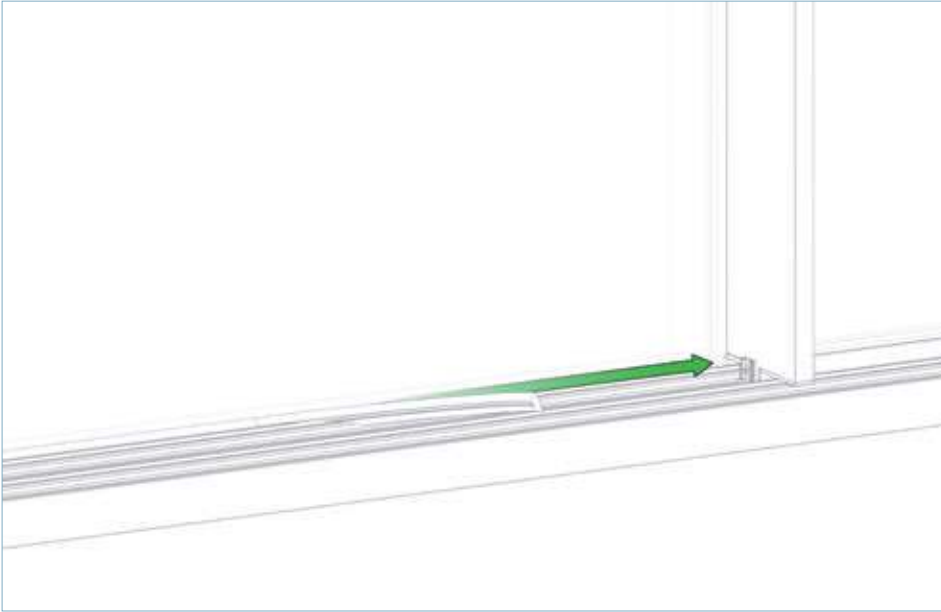

Fit wedge gasket between glass and outer frame, on both inside and outside glass faces.


FIG 55



Apply bead of structural sealant along the length of interlocker (both inside and outside faces). Leave to fully cure before operating the set.


FIG 56

## 11. Install frame covers

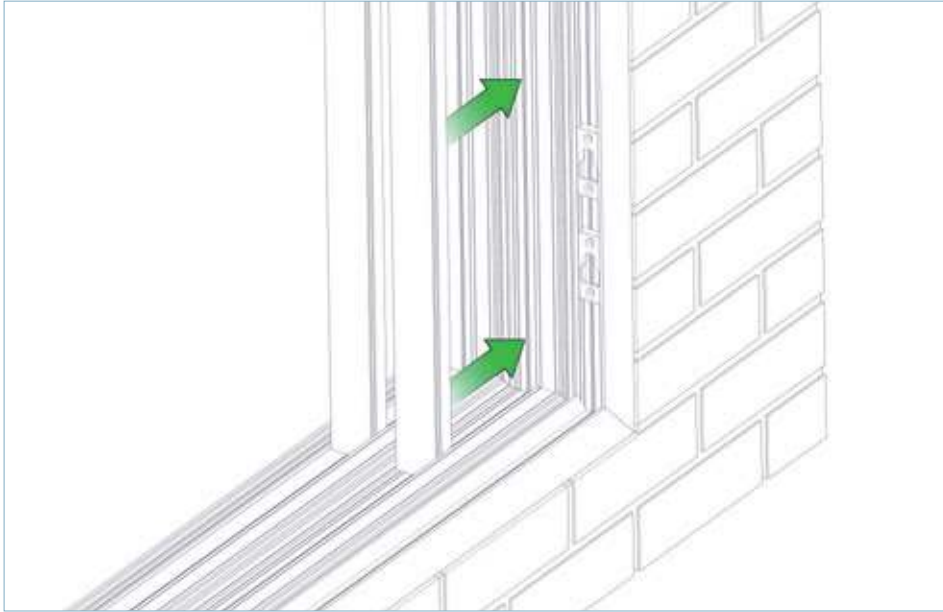

Clip in the vertical frame cover pieces.

FIG 57

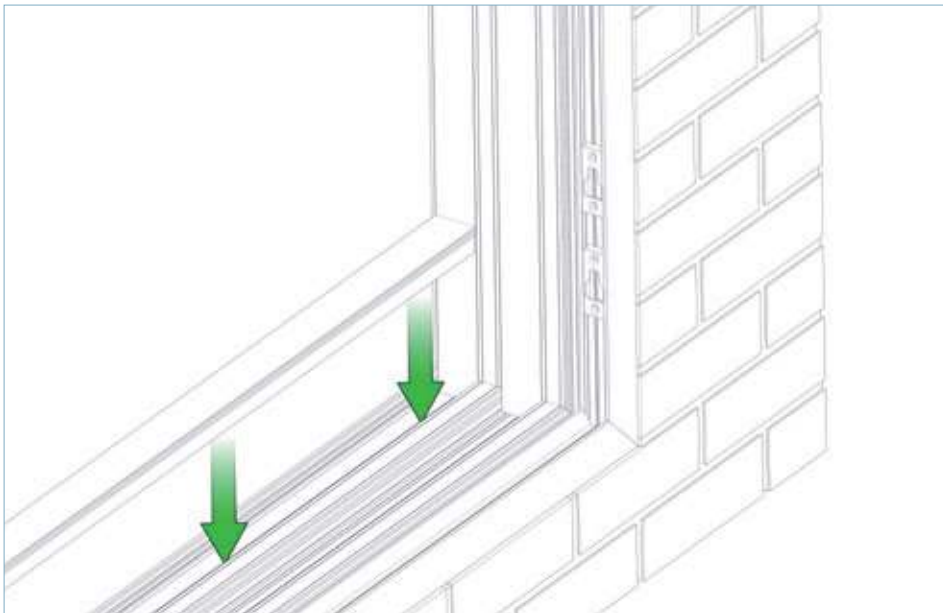

Clip in the horizontal frame cover pieces.

FIG 58



# Accreditations...

At Origin, we pride ourselves on providing best quality products backed by best levels of service and efficiency. Put simply, our aim is to continuously learn, evolve and improve.

We are well known for having rigorously high standards in everything that we do. We're also known for innovation, but we never want to settle: if there's a way that we could do something better, we will find it.

This ethos has been instilled throughout Origin. Whether it's a process, product offering or even the company's sustainability, we have created a culture that encourages continuous improvement.

To demonstrate our commitment and as a way of measuring our performance, we work towards gaining certain prestigious accreditations. Our achievements show a strong moral and ethical intent in how we operate and how we try to do things the best way, not because we are told to do so, but because we think it is the right thing to do.

We'll run through some of these now.



## ISO 9001 – Quality Management...

ISO 9001 is an international standard that assesses a company's quality management system. Having first achieved it in 2013, the fact that we still are certified means that we have a track record of consistently providing products and services that meet both customer and regulatory requirements.

It's something that we take very seriously and its influence is integrated into every process.

Key areas of this include:

Product quality – To ensure a product's overall manufacture is flawless, we have checks in place to guarantee you the best quality. A few examples are:

- Supply chain – an inspection at the point of delivery and before going into manufacturing. If anything is spotted, it's documented and raised with the supplier.
- Production – there are quality checks at every station, not only to look over the previous person's work, but to review the quality of the overall build.
- Equipment – a robust maintenance schedule for machinery and equipment ensures consistency.
- Pre-delivery – before it is packaged and loaded ready for delivery, there's another thorough check to ensure nothing's happened whilst being moved from station to station.

## Accreditations

- Feedback – as part of our mission to always innovate, whether it's from internal or external stakeholders, feedback is imperative. We are very proactive at bringing this type of information back into the business and learning, as it gives us an opportunity to improve.
- Training and development for our employees – meaning we're better at understanding the good, the bad, and what we can do better.

## ISO 14001 – Environmental Management...

Now more than ever, we need to be aware of the impact our operations may have on our environment; the legal obligations we must adhere to, and ensuring we are doing things the right way.

The internationally renowned ISO 14001 accreditation measures the environmental management system that we have in place. It's a subject that's very close to our hearts, which is why working towards this standard was an easy decision.

We care about the resources we use for our products – where they come from and where they end up. To add to this, we aim to be zero waste to landfill and have already put into place many positive changes to make this happen. We want our customers to buy from us with a clear conscience and feel that ISO 14001 can prove that Origin is taking responsibility, acting ethically, legally and exercising best practice in all that we do. Our environmental management system covers:

- Waste management and energy targets – to reduce our consumption and impact on the environment. Helpful hints, tips and reminders are prompted to all staff regularly, so that they can join us in our goal and see how small changes to their work practices can have a big impact.
- Product design and lifecycle – recyclability and sustainability are a design priority for us.
- Supply chain – choosing suppliers that are aligned with our ethos and vision. This is applicable not only when bringing on new suppliers, but also working with existing ones to better their carbon footprint – whether that's minimising packaging, reusing or even our drivers picking up the materials on their routes, rather than a supplier sending their own fleet, we are constantly reviewing how we can improve.



## ISO 45001 – Health and Safety...

As with everything Origin, we go above and beyond when it comes to health and safety best practices.

ISO 45001 is a standard we achieved in 2019, and it recognises our commitment to employee safety, reduces workplace risks and creates a better, safer working condition.

We have spent time reviewing all the activities that go on within the offices, manufacturing centres and warehouses, and have created a full risk log which will link up to our current risk assessments. These are being reviewed one by one to ensure we are minimising risks as much as we can to keep Origin employees, and anyone who may be affected by these risks, safe. Employees working in the factories are actively encouraged to put forward risks and hazards from their observations, which is fed back so they can be actioned to be rectified or developed into an improved method of operating.

We share knowledge through inter-departmental health and safety committee meetings, risk assessments, regular safety and environmental checks and training to ensure that we are up to date with legislation and best practice.

Our bespoke Safety, Health and Environmental (SHE) Portal has provided us with a place to document, set reviews and monitor operational risks across Origin. This portal is an ongoing project that we will continue to work on, allowing us to ensure that safety at Origin is at the best standard we can achieve.

We are People focused and aim to keep people safe, both inside and outside of Origin, providing awareness, training, instruction and information to operate safely.



# Contact

## Accounts

---

**t** 08448 802 371 or 01494 416 895      **e** [Finance@origin-global.com](mailto:Finance@origin-global.com)

## Marketing

---

**t** 08448 802 374 or 01494 416 897      **e** [Marketing@origin-global.com](mailto:Marketing@origin-global.com)

## Sales Operations

---

**t** 0808 168 5816 or 01494 686 868      **e** [OrdersNorth@origin-global.com](mailto:OrdersNorth@origin-global.com)

**e** [OrdersSouth@origin-global.com](mailto:OrdersSouth@origin-global.com)

## Fleet and Logistics

---

**t** 08448 802 378 or 01494 416 898      **e** [Logistics@origin-global.com](mailto:Logistics@origin-global.com)

**origin**  
DOORS AND WINDOWS

Origin Global HQ, Stuart House, Castle Estate,  
Coronation Road, High Wycombe  
Buckinghamshire, HP12 3TA

**t** 0808 168 5816  
**e** [enquiry@origin-global.com](mailto:enquiry@origin-global.com)  
**w** [www.origin-global.com](http://www.origin-global.com)



THE QUEEN'S AWARDS  
FOR ENTERPRISE:  
INTERNATIONAL TRADE  
2020



origin

DOORS AND WINDOWS

# Patio Slider (OS-29, OS-44 & OS-77) Specification Guide




# Contents


Specification Overview	03
Security	06
Optional Extras	07
Patio Slider Make-Up	09
Size Limitations	10
Performance and Limitations	11
Master Configurations	14
Technical Drawings	23
Handles	41
Gaskets	42
All Configurations	43
Installation Guide	46
Accreditations	57

# Specification Overview


## Thermally Broken Aluminium Patio Slider

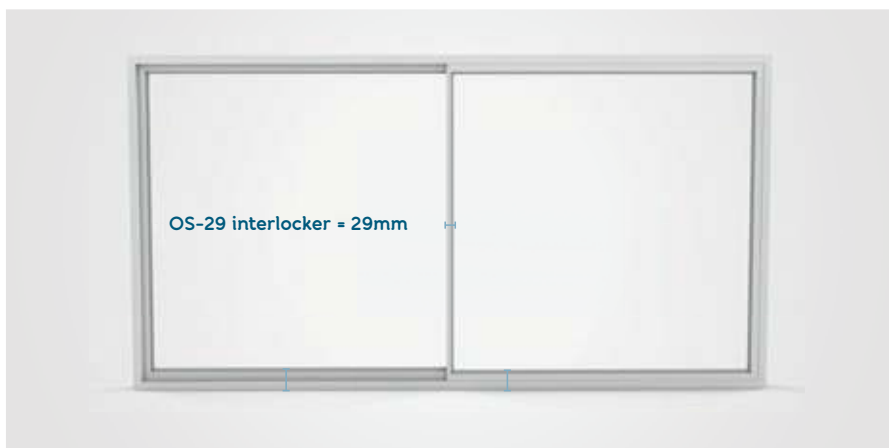

External view  
of the OS-29

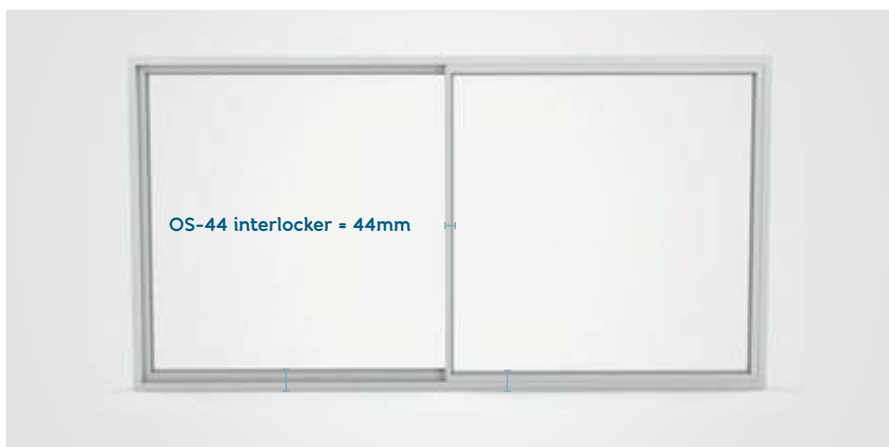

External view  
of the OS-44

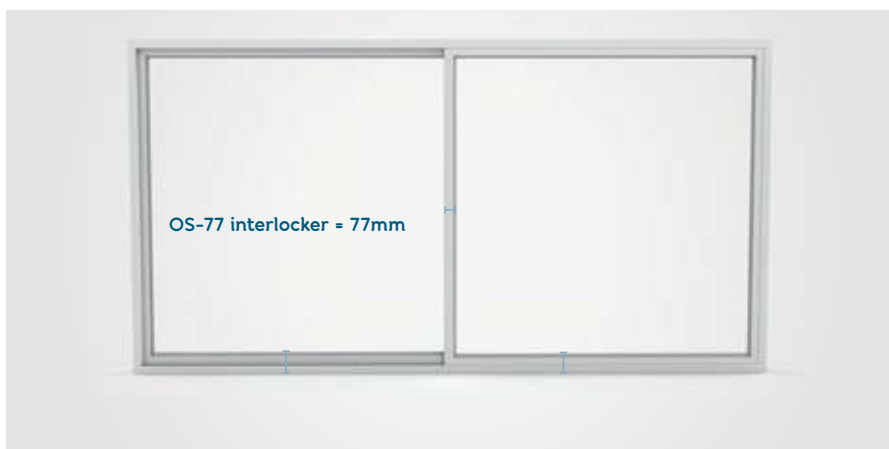

External view  
of the OS-77

For track depth dimensions, please see page 4.

## Profile Specification

Frame Depth	2 options: 143mm (double track) and 213mm (triple track)
Sightline	29mm, 44mm and 77mm
Track Height	50mm (double and triple track)
Minimum Sash Size	710mm wide x 1925mm tall
Maximum Sash Size	2000mm wide x 2520mm tall <i>individual panels cannot exceed 5.04sqm</i>
Maximum Sash Weight	200kg

## Features

- ▶ Up to a 20-year guarantee including gaskets and seals<sup>1</sup>
- ▶ PAS 24:2016 certified<sup>2</sup>
- ▶ Concealed running gear and track
- ▶ Square beading
- ▶ Weather testing BS 6375 part 1 certified

## Options and extras

- ▶ Up to 6 panelled configurations - these can be all sliding or a combination of fixed and sliding
- ▶ 225mm cill available for double track configurations
- ▶ 60mm drip bar option
- ▶ Available in over 150 RAL shades
- ▶ Three handle options to choose from
- ▶ 35mm frame extender
- ▶ 2500EA, 4000EA and 5000EA trickle vents available
- ▶ Full 3 Star Cylinder option available

## Glazing options

- ▶ OS-29 and OS-44 - Semi-dry glazed system with either a 28mm, 32mm or 36mm glass unit.
- ▶ OS-77 - Dry glazed system with either a 28mm, 32mm or 36mm glass unit.

<sup>1</sup> - Guarantee based on location of where the doors will be installed.

Full terms and conditions can be found on the Origin website - [origin-global.com/terms-and-conditions](http://origin-global.com/terms-and-conditions).

<sup>2</sup> - PAS 24:2016 is only available on the OS-77.



## Specification Overview

The Origin Patio Slider has 7 popular colours. These are available in as little as 1-week for the OS-44 and OS-77 and 2-weeks for the OS-29.




Black Grey (7021M)




Slate Grey (7015M)



Hipca White (9910G) and 9910M)



Anthracite Grey (7016M)



Jet Black (9005M)



Dark Silver Metallic (9007M)



Outside of this, the Origin Patio Slider can be specified in any RAL colour. These will be available in 4-weeks.

For the full range of colours and most up to date lead times, visit [origin-global.com](http://origin-global.com)

### Lead Times

Popular colour OS-44 and OS-77: 1-week

Popular colour OS-29: 2-weeks

## Drainage cap colours

Popular Colour	Drainage Cap Colour	X3 Code
9007M (Dark Silver Metallic)	No. 38 Grey	C01349
7021M (Black Grey)	Dark Grey	C01350
9005M (Jet Black)	Black	C01163
7015M (Slate Grey)	Dark Grey	C01350
9910G (Hipca White)	White	C01353
7016M (Anthracite Grey)	Dark Grey	C01350

# Security

## Origin's Multi-Point Lock

Each door is equipped with an ultra-secure multi-point locking system, with 6 points of locking, including 4 hook keeps and 2 additional shootbolts.

## Locking Cylinders

In addition to our standard barrels, we have a choice of 3-Star Diamond Cylinder upgrades available.

3-Star Diamond Cylinder



# Optional Extras

## Trickle Vents

Trickle vents have to meet the minimum air flow rates as defined in the British Building Regulations (see specifics below).

Should it be required, our Patio Sliders can be specified with discreetly designed trickle vents which are installed through the top track or frame extender for additional ventilation, ensuring the doors meet and surpass building regulations.



*Trickle vents on our Patio Sliders can only be fitted through the top track or through the frame extender, depending on the chosen system.*

See OSS for more details

## Handles

- ▶ A 500mm bar handle with separate locking
- ▶ An all-in-one 300mm handle with integrated locking
- ▶ Patio D-handle



500mm  
Offset handle  
Stainless Steel



300mm  
All-in-one handle  
Stainless Steel



Patio D-handle  
Stainless Steel, White,  
Anthracite and Black

## Cills

A 225mm cill option is available. This can be powdercoated to match the doors.



## Drip Bar


A 60mm drip bar is also available.



## Frame Extender

A 35mm frame extender is available. This allows for thicker plaster lines on ceilings and offers more room that will allow trickle vents to be fitted.

# Patio Slider Make-Up

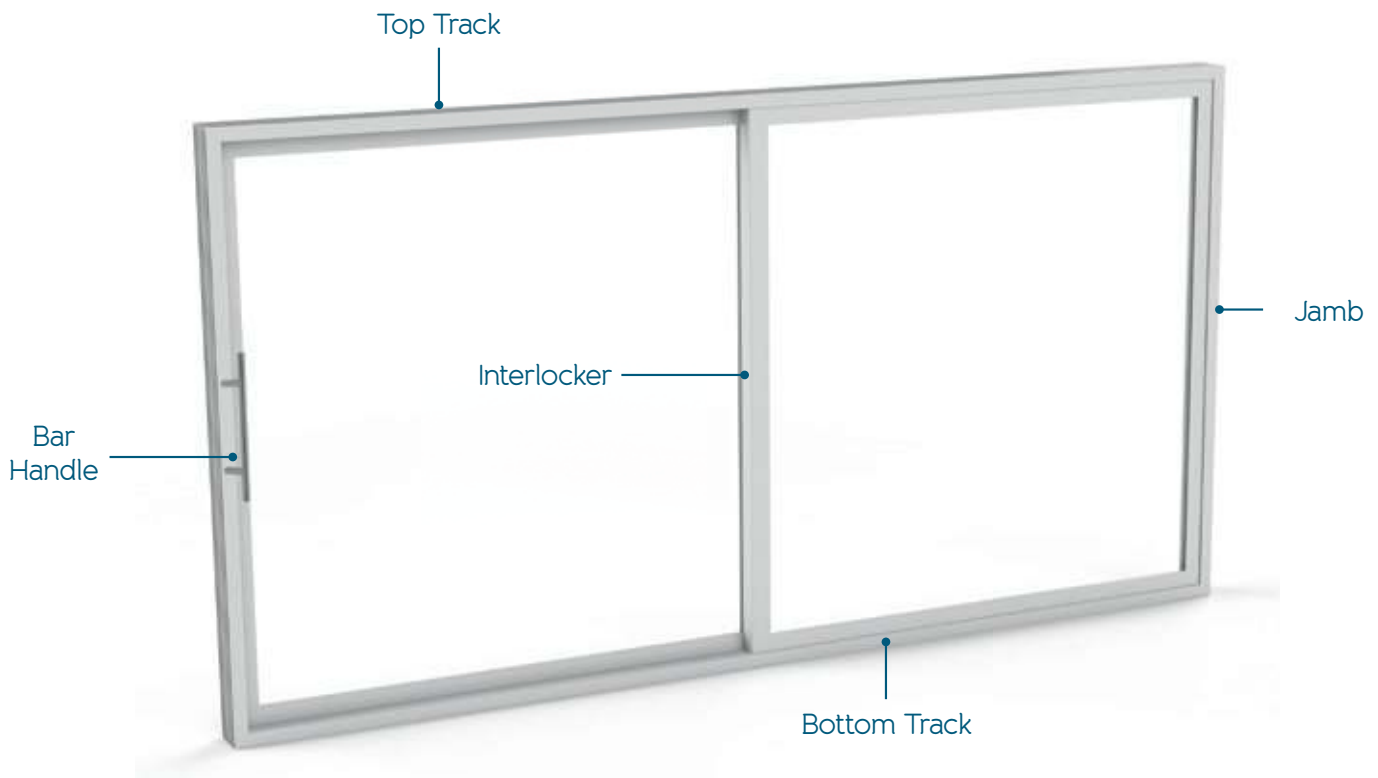

Make-up is dependent on the configuration chosen.

# Size Limitations

## Slider Set Limits

Slider Size	Minimum			Maximum		
	OS-29 / OS-44	OS-77	OS-20	OS-29	OS-44/ OS-77	OS-20
XO or OX (1 Sliding, 1 Fixed) Width (mm)	1463	1462	1228	4052	4010	4428
XX (2 Sliding) Width (mm)	1463	1462	1278	4052	4010	4478
XXO or OXX (2 Sliding, 1 Fixed) Width (mm)	2102	2117	1774	6002	5939	6574
XXX (3 Sliding) Width (mm)	2102	2117	1824	6002	5939	6624
OXXO (2 Sliding, 2 Fixed) Width (mm)	2850	2848	2405	8028	7944	8804
XXXX (4 Sliding) Width (mm)	N/A	N/A	2505	N/A	N/A	8904
OXXXXO (4 Sliding, 2 Fixed) Width (mm)	4129	4159	3497	11929	11803	13096
XXXXXX (6 Sliding) Width (mm)	N/A	N/A	3597	N/A	N/A	13196
All Configs Height (mm)	2005	2005	1600	2600	2600	3000
Sash Width (mm)	710	710	550	2000	2000	2200
Sash Height (mm)	1925	1925	1600	2520	2520	3000
Sash Area (sqm)	N/A	N/A	N/A	6	6	6.6
Sash Width / Height Ratio	N/A	N/A	N/A	1:3	1:3	1:3
Sash Weight (kg)	N/A	N/A	N/A	200	200	200
Sashes in one set	1			6		

# Performance and Limitations

## Origin Thermal Ratings

U-Value 1.3 W/m<sup>2</sup>k

---

## Glazing Specifications

U-Value

1.0 centre pane ● 1.6 W/m<sup>2</sup>K

---

0.8 centre pane ● 1.4 W/m<sup>2</sup>K●

---

0.7 centre pane ● 1.3 W/m<sup>2</sup>K

● Minimum value for compliance with Building Regulations Part L for replacements

● Argon Gas Fill

## Weather Rating

Air Permeability Class 3

---

Resistance to Wind Load Class A4<sup>1</sup>

---

Water Tightness Class 6a

## Performance Testing

BS 6375 Part 1 Certified

---

PAS 24:2016 (only available on OS-77)

## Building Regulation Requirements

New Build

Limiting Value 1.6 W/m<sup>2</sup>K

---

Replacements 1.4 W/m<sup>2</sup>K

---

Energy Rating C or better

All doors must conform to these requirements

<sup>1</sup> - Varies dependent on panel size

OS29/44/77

# Certificate of thermal simulation

PRODUCT:	Origin Sliding Door - OS29; OS44; OS77
SIM - SOFTWARE:	Physibel Building Physics Software - BISCO 2D
GLASS CENTRE PANE U/VALUE	0.8 W/m <sup>2</sup> K
INSULATION	Glazing Insulation

Thermal Transmittance (U- Value):  
1.4 W/(m<sup>2</sup>K)

*All thermal simulations carried out in accordance with:  
BS EN ISO 10077 - 2: 2017, Thermal Performance of windows, doors and shutters - calculation of thermal transmittance.*

TESTED BY: David Ginger (Product Compliance Director)  
DATE: May 2022  
SIGNED: 

Email: [enquiry@origin-global.com](mailto:enquiry@origin-global.com) | Web: [www.origin-global.com](http://www.origin-global.com)

Origin Global HQ, Stuart House, Castle Estate, Coronation Road, Cressex Business Park, High Wycombe, Buckinghamshire, HP12 3TA

OFDL\_38149.3

**origin**  
DOORS AND WINDOWS



OS-77

# Certificate of PAS 24

PRODUCT: **ORIGIN SLIDER OS-77**

SUMMARY OF TESTING PROCEDURE:

PAS 24: 2016 - CLAUSE ANNEX A, B4.3, B.4.4.2, B.4.4.3,  
B.4.4.4, B.4.5, B.4.6, B.4.7, B.4.8 AND B.4.9.2.2

RESULT:

PASS

PASSED PAS 24: 2016 FOR THE REQUIREMENTS OF BOTH 3 STAR KEY  
REMOVABLE AND THUMBTURN CYLINDERS.

TO COMPLY A BSEN 356 P1A CERTIFIED GLASS UNIT  
MUST BE INSTALLED.

TESTED BY: Build Check Ltd

DATE: 01/08/2019

Email: [enquiry@origin-global.com](mailto:enquiry@origin-global.com) | Web: [www.origin-global.com](http://www.origin-global.com)


Origin Global HQ, Stuart House, Castle Estate, Coronation Road,  
Cressex Business Park, High Wycombe, Buckinghamshire, HP12 3TA

OFDL\_18.144.1

**origin**  
DOORS AND WINDOWS

# Master Configurations

OX (1 fixed, 1 sliding) or XX (2 sliding)

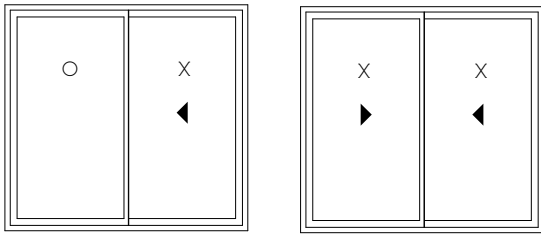


KEY

O - Indicates Fixed sash


X - Indicates Opening sash

Arrow - Indicates opening direction


OXX (1 fixed, 2 sliding) or XXX (3 sliding)

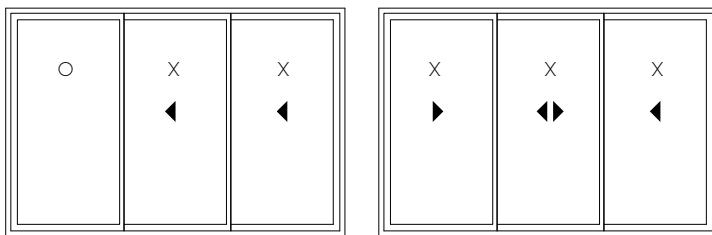

OXXO (2 fixed, 2 sliding)


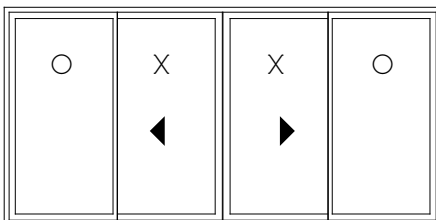


OXXXXO (2 fixed, 4 sliding)

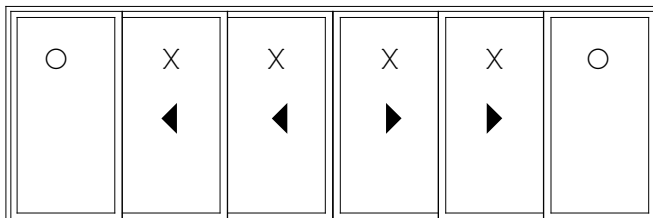

Master Configuration: XO (1 sliding, 1 fixed) or XX (2 sliding)

See Configuration Key for section detail ▶

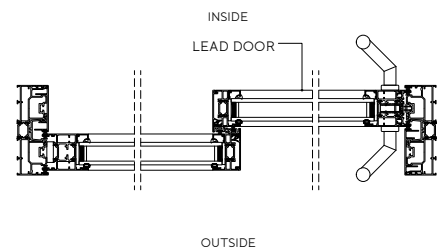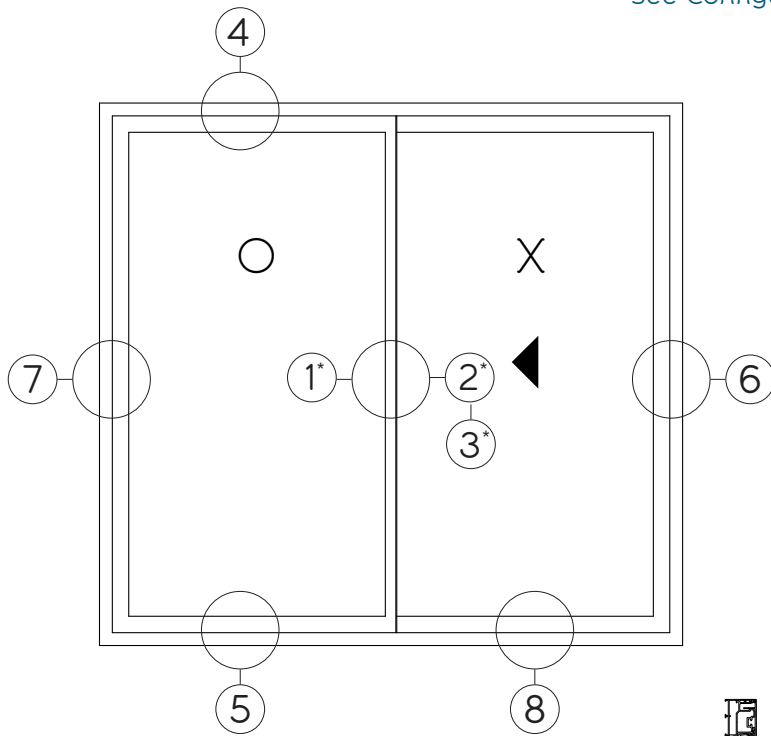

\*The interlocker will be dependent on the system chosen.



2+0


See page 48 for configurations

## Key features

- ▶ Both panels can be sliding, or one can be fixed with one sliding
- ▶ Traditional patio door style


# Configuration Key

1 - OS-77 Interlocker




See page 28

2 - OS-44 Interlocker




See page 29

3 - OS-29 Interlocker

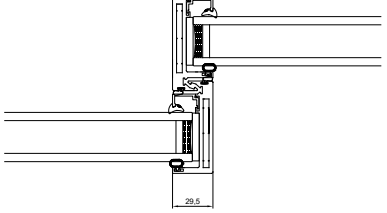


See page 30

4 - Double Frame - Top Track

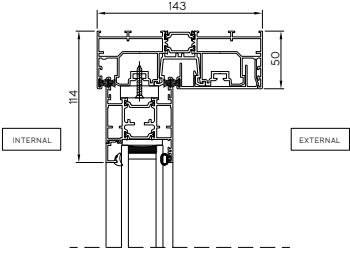


See page 31

5 - Double Frame - Bottom Threshold




See page 32

6 - Double Frame - Locking Jamb




See page 33

7 - Double Frame - Fixed Jamb



See page 34


8 - Double Frame - Drainage Frame



See page 35

Master Configuration: OXX (1 fixed, 2 sliding) or XXX (3 sliding)

See Configuration Key for section detail ▶

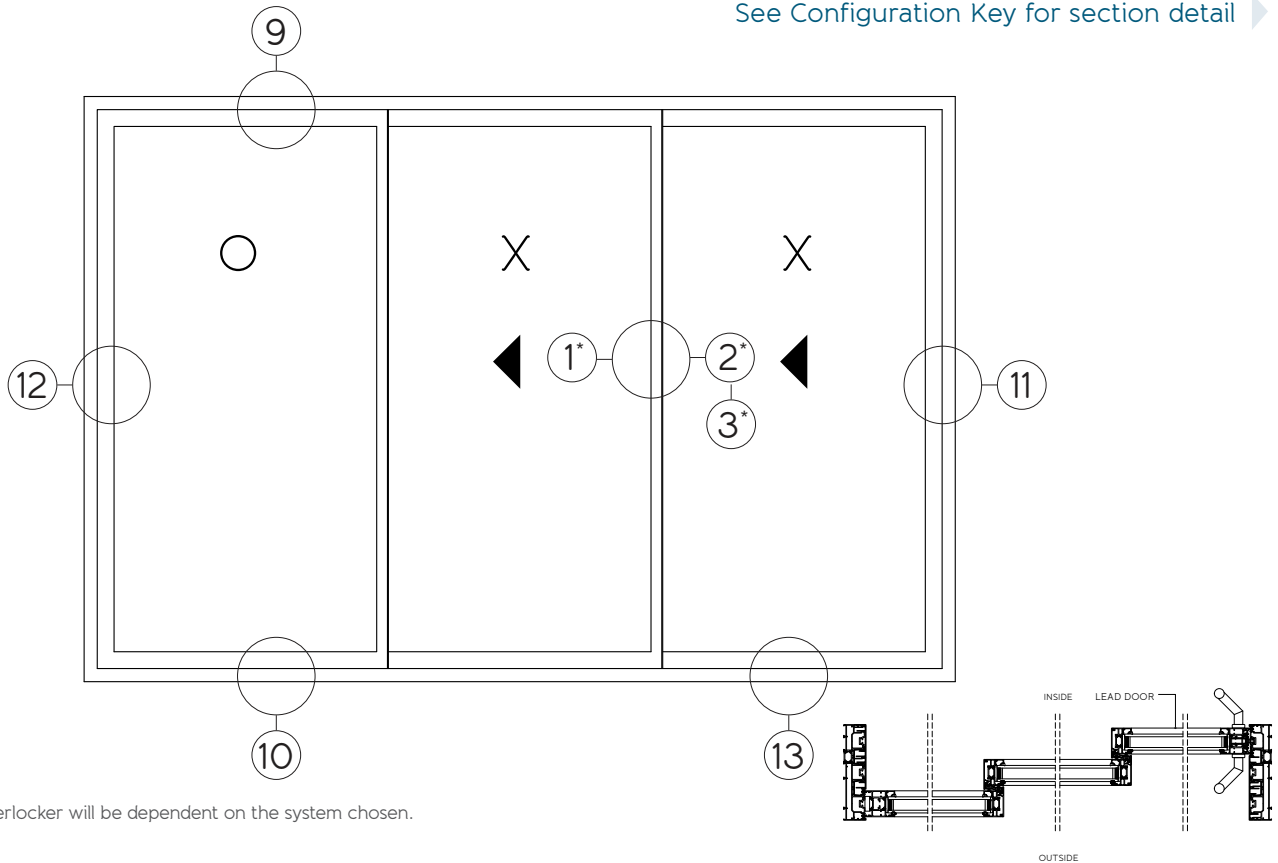


### Key features

- ▶ Fixed pane can be specified on the left or right

See page 48 for configurations


Configuration Key

1 - OS-77 Interlocker




See page 28

2 - OS-44 Interlocker




See page 29

3 - OS-29 Interlocker

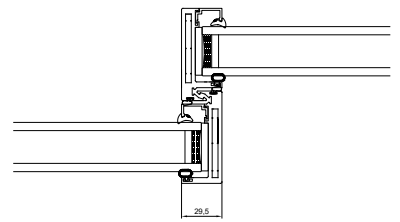


See page 30

9 - Triple Frame - Top Track




See page 36

10 - Triple Frame - Bottom Threshold




See page 37

11 - Triple Frame - Locking Jamb




See page 38

12 - Triple Frame - Fixed Jamb




See page 39

13 - Triple Frame - Drainage Details

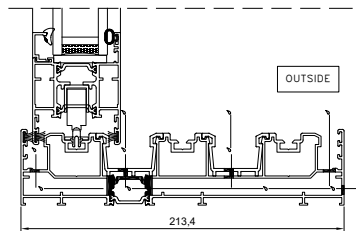


See page 40

Master Configuration: OXXO (1 fixed, 2 sliding, 1 fixed)

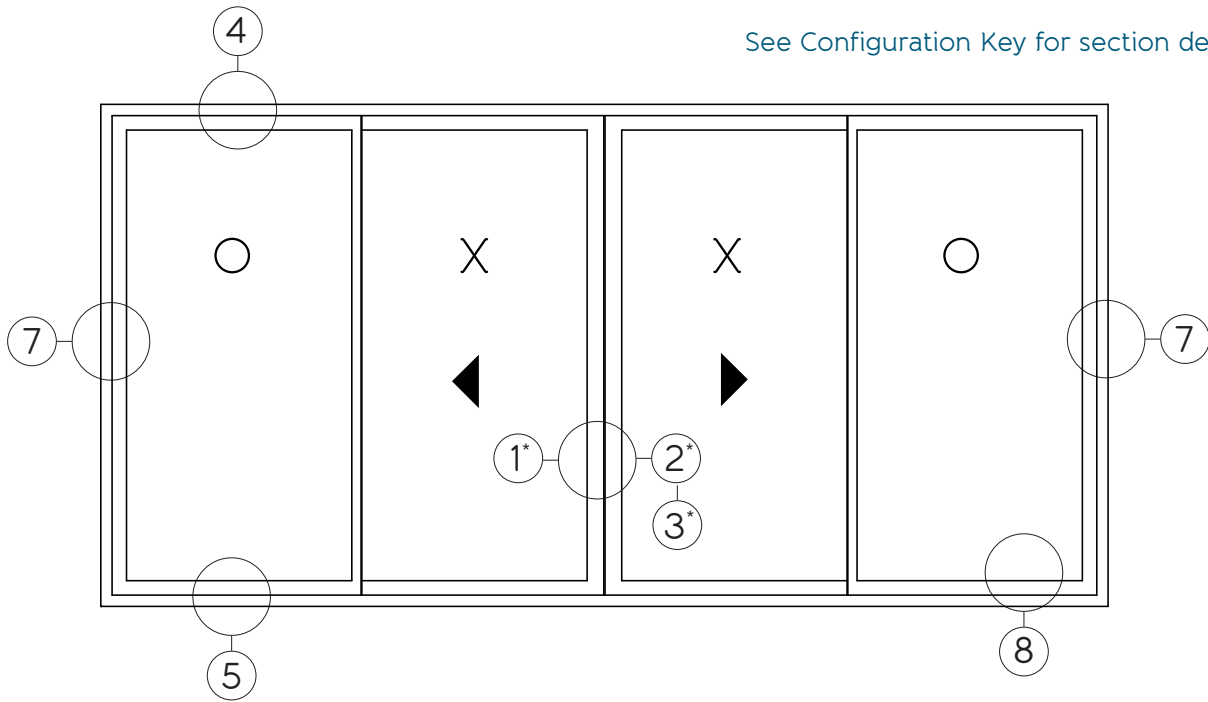

See Configuration Key for section detail ▶

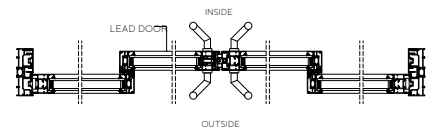

\*The interlocker will be dependent on the system chosen.




### Key features

- ▶ Fixed pane can be specified on the left or right

See page 48 for configurations


Configuration Key

1 - OS-77 Interlocker




See page 28

2 - OS-44 Interlocker




See page 29

3 - OS-29 Interlocker

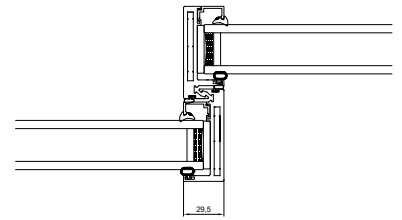


See page 30

4 - Double Frame - Top Track

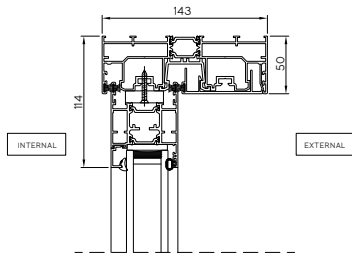


See page 31

5 - Double Frame - Bottom Threshold




See page 32

7 - Double Frame - Fixed Jamb



See page 34

8 - Double Frame - Drainage Frame




See page 35



Master Configuration: OXXXXO (1 fixed, 4 sliding, 1 fixed)

See Configuration Key for section detail ▶

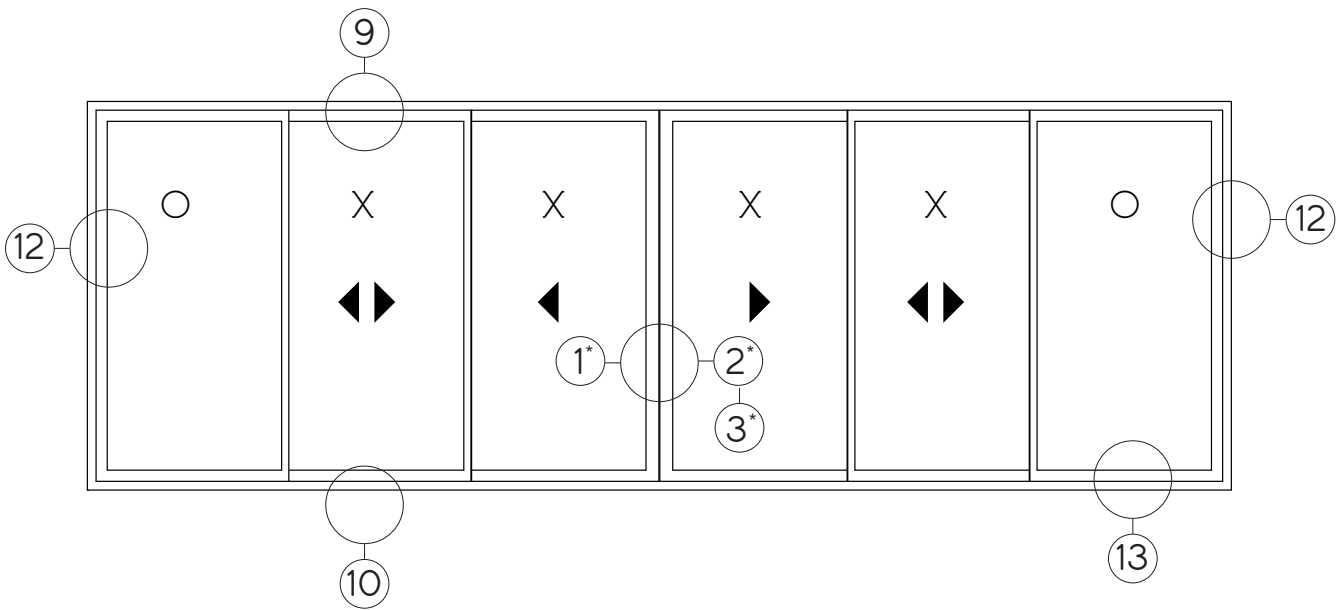

\*The interlocker will be dependent on the system chosen.


### Key features

- ▶ Fixed pane can be specified on the left or right

See page 48 for configurations


Configuration Key

1 - OS-77 Interlocker




See page 28

2 - OS-44 Interlocker




See page 29

3 - OS-29 Interlocker

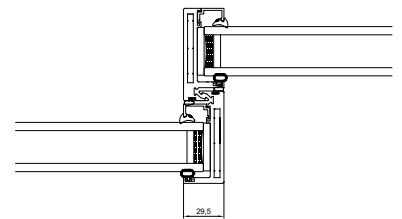


See page 30

9 - Triple Frame - Top Track




See page 36

10 - Triple Frame - Bottom Threshold




See page 37

12 - Triple Frame - Fixed Jamb



See page 39



13 - Triple Frame - Drainage Details

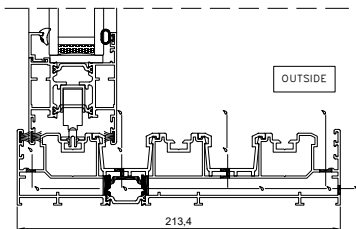



See page 40

# Technical Drawings



## 1 OS-77 Interlocker Detail

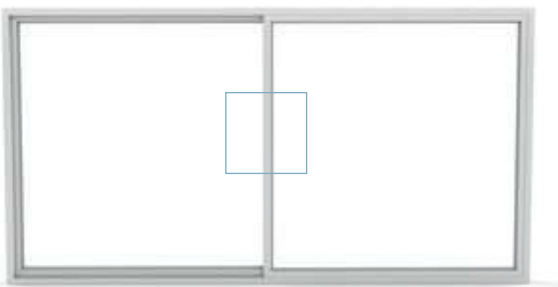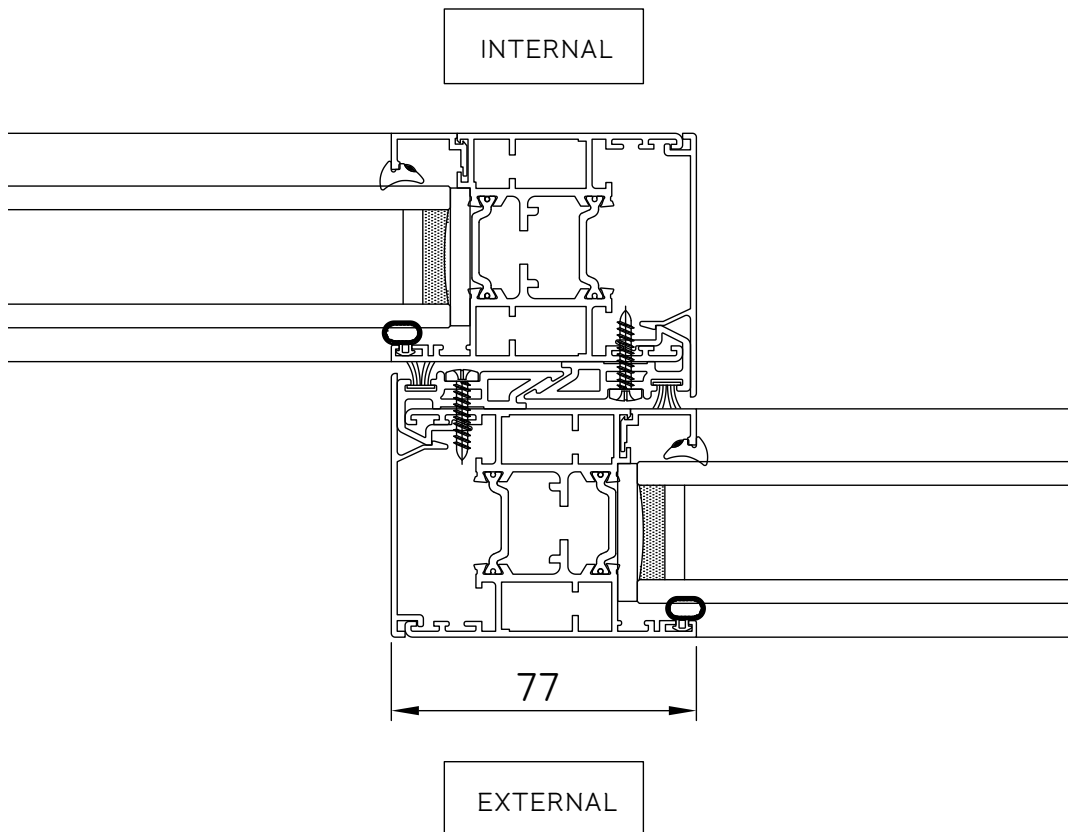


2 OS-44 Interlocker Detail

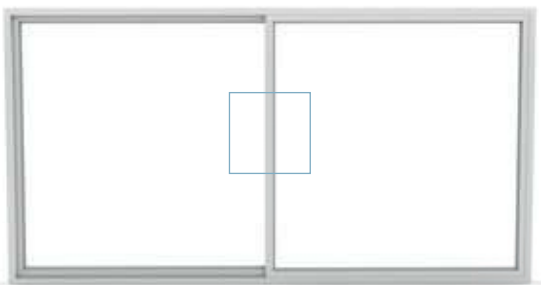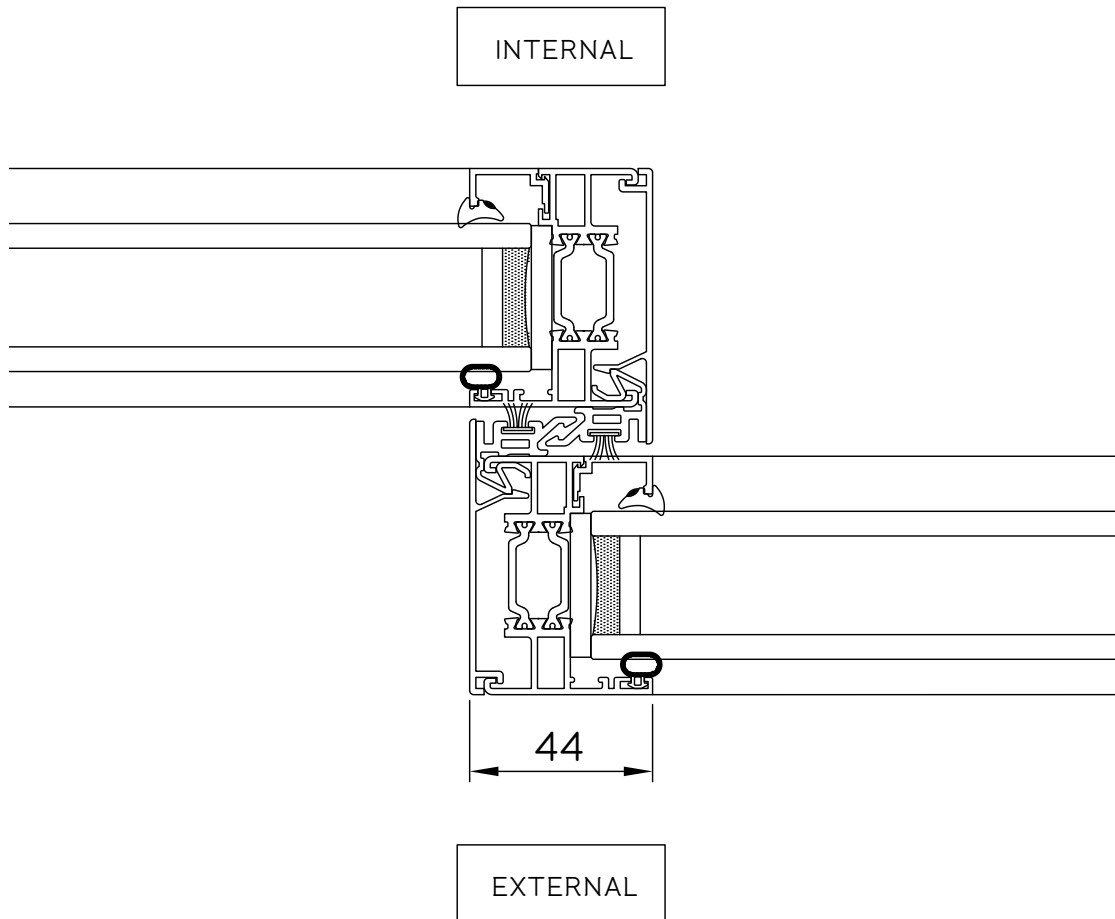


3 OS-29 Interlocker Detail

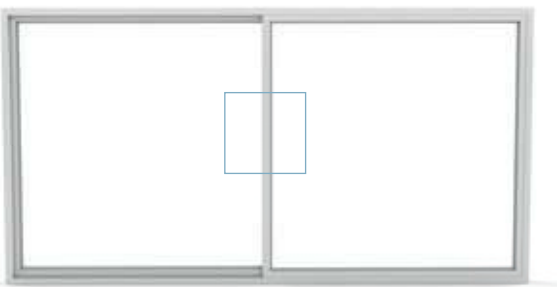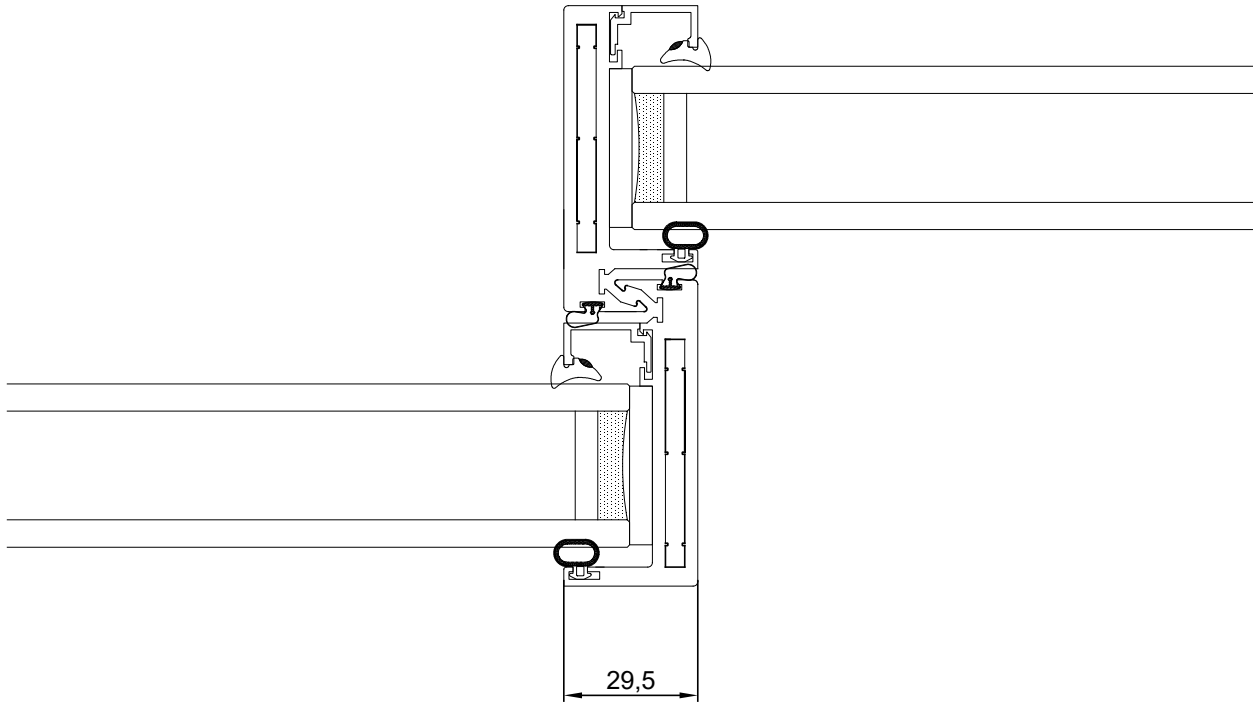


4 Double Frame - Top Track Detail

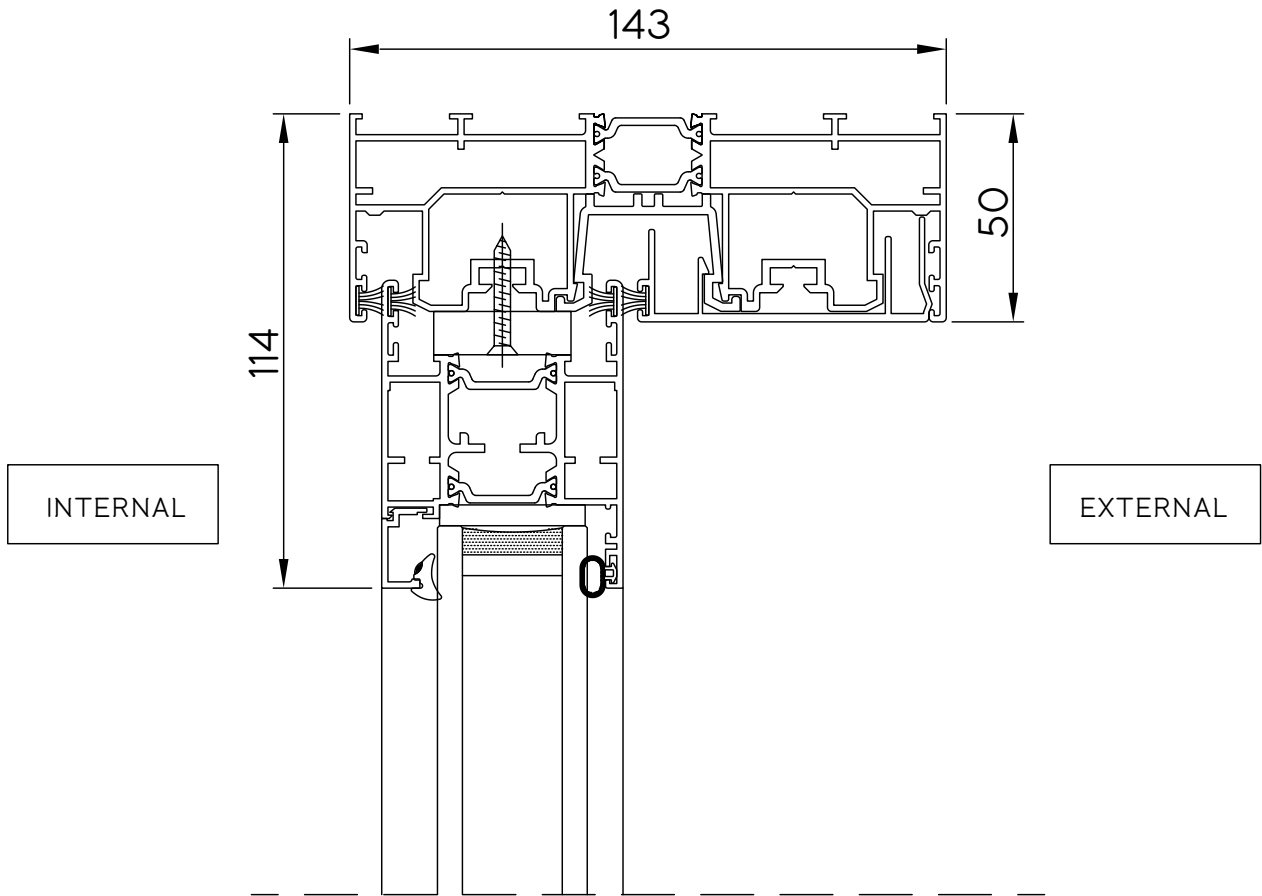

5 Double Frame - Bottom Track Detail

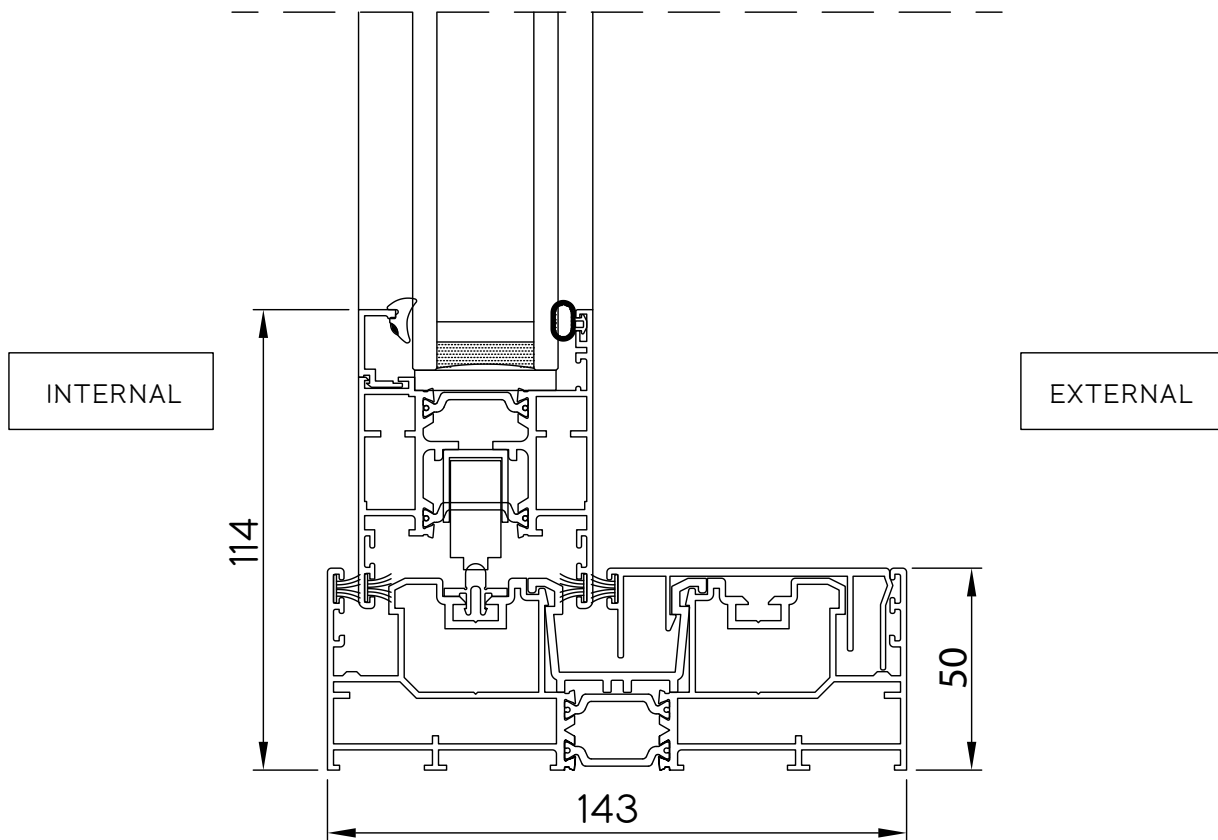


6 Double Frame - Locking Jamb Detail


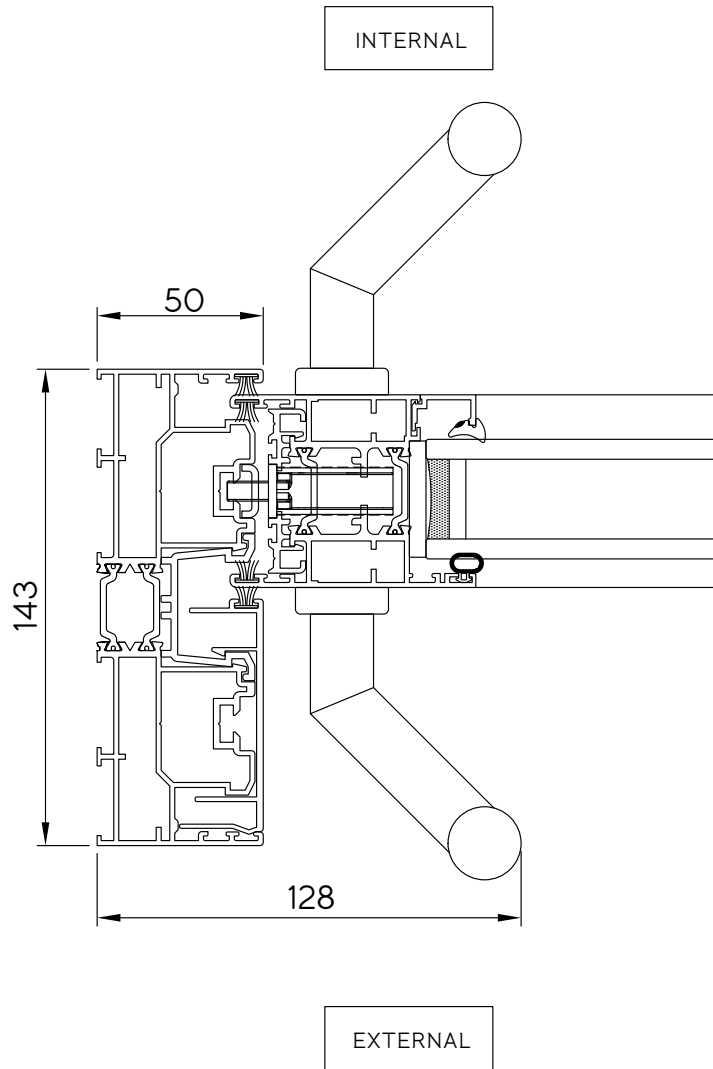






7 Double Frame - Fixed Jamb Detail

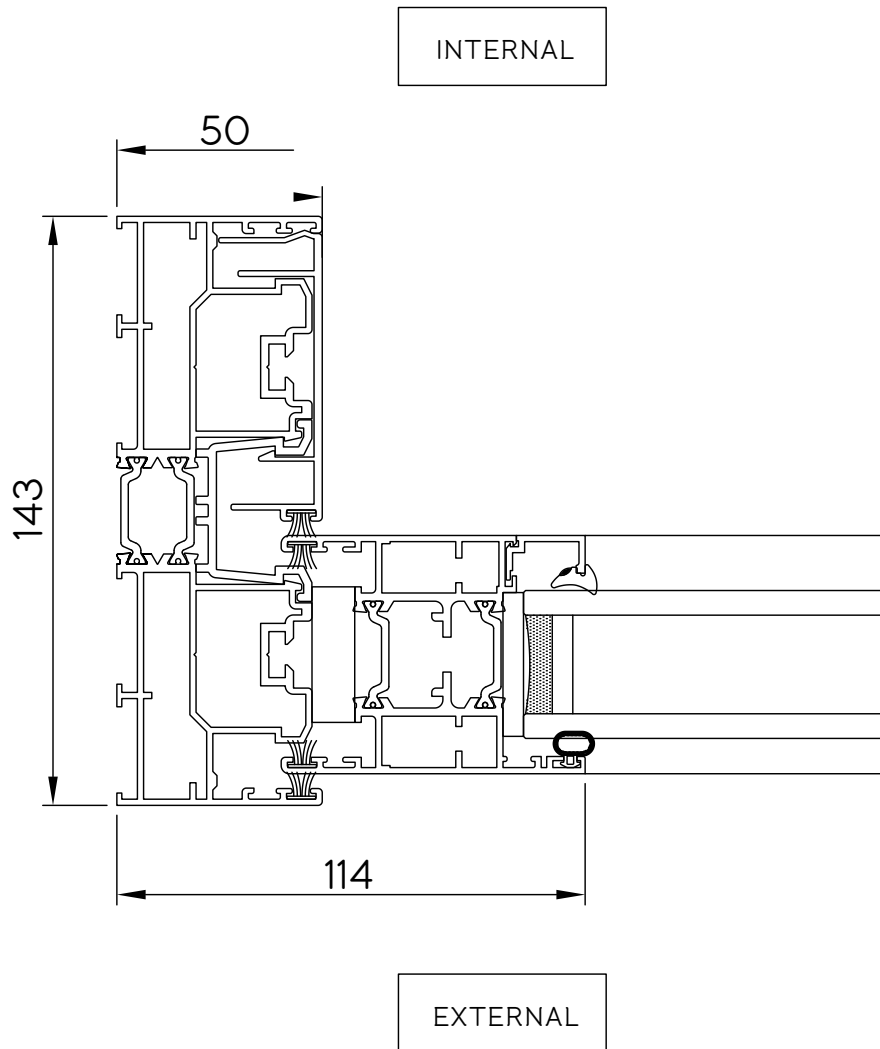



8 Double Frame - Drainage Detail

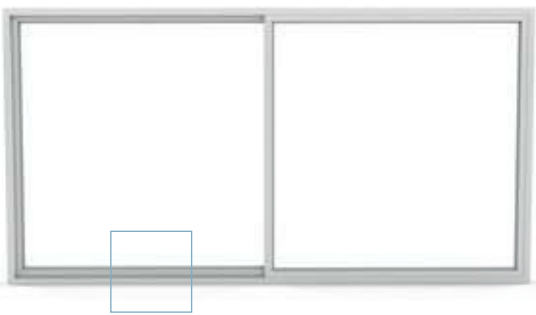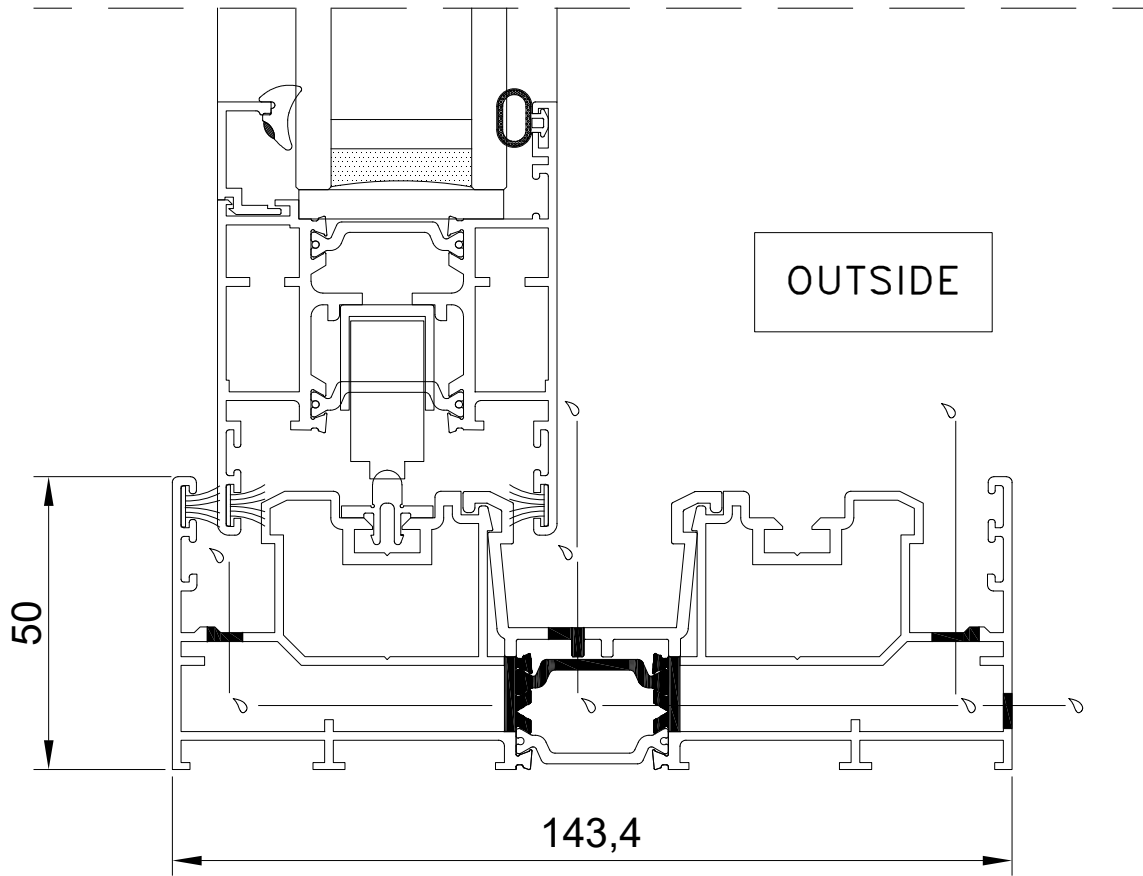


9 Triple Frame - Top Track Detail

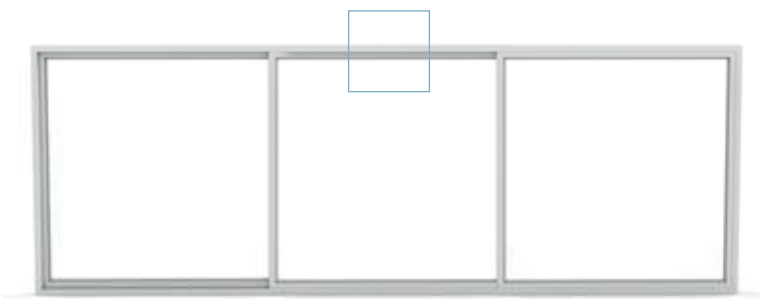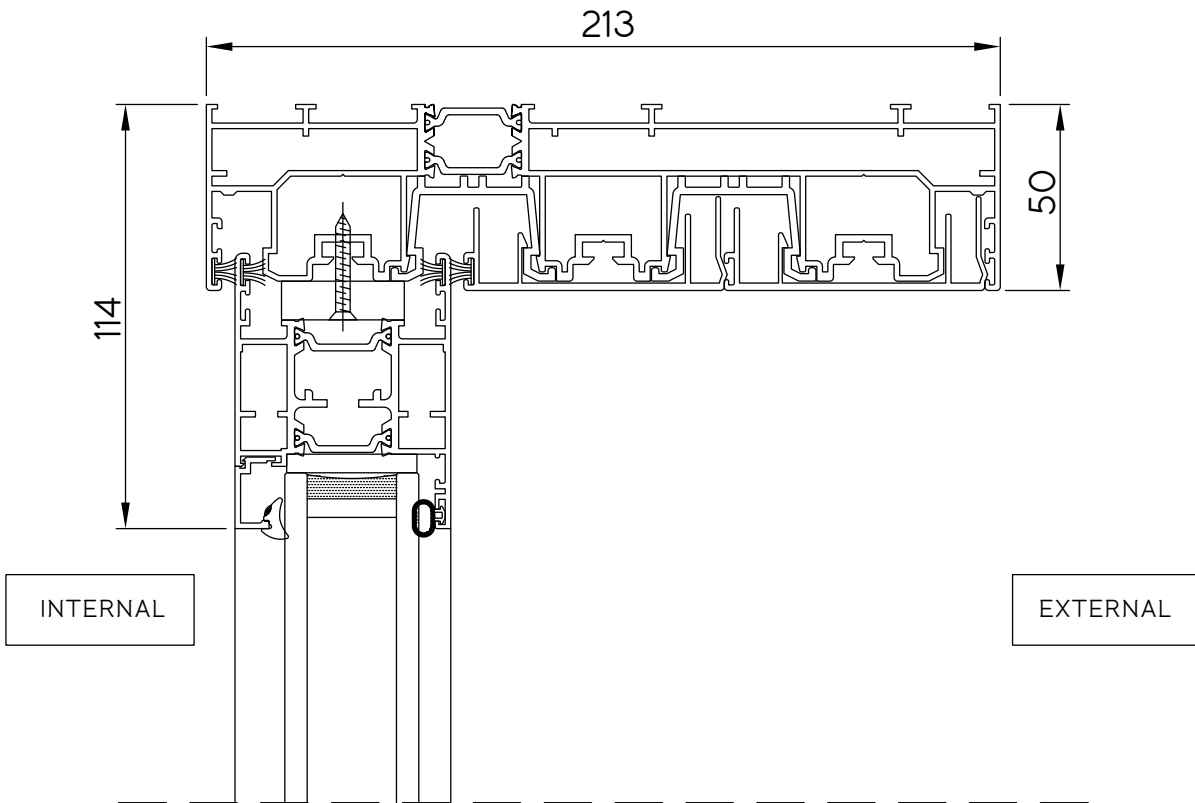


10 Triple Frame - Bottom Track Detail

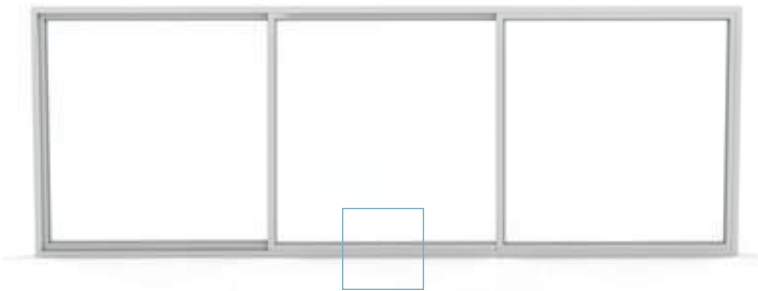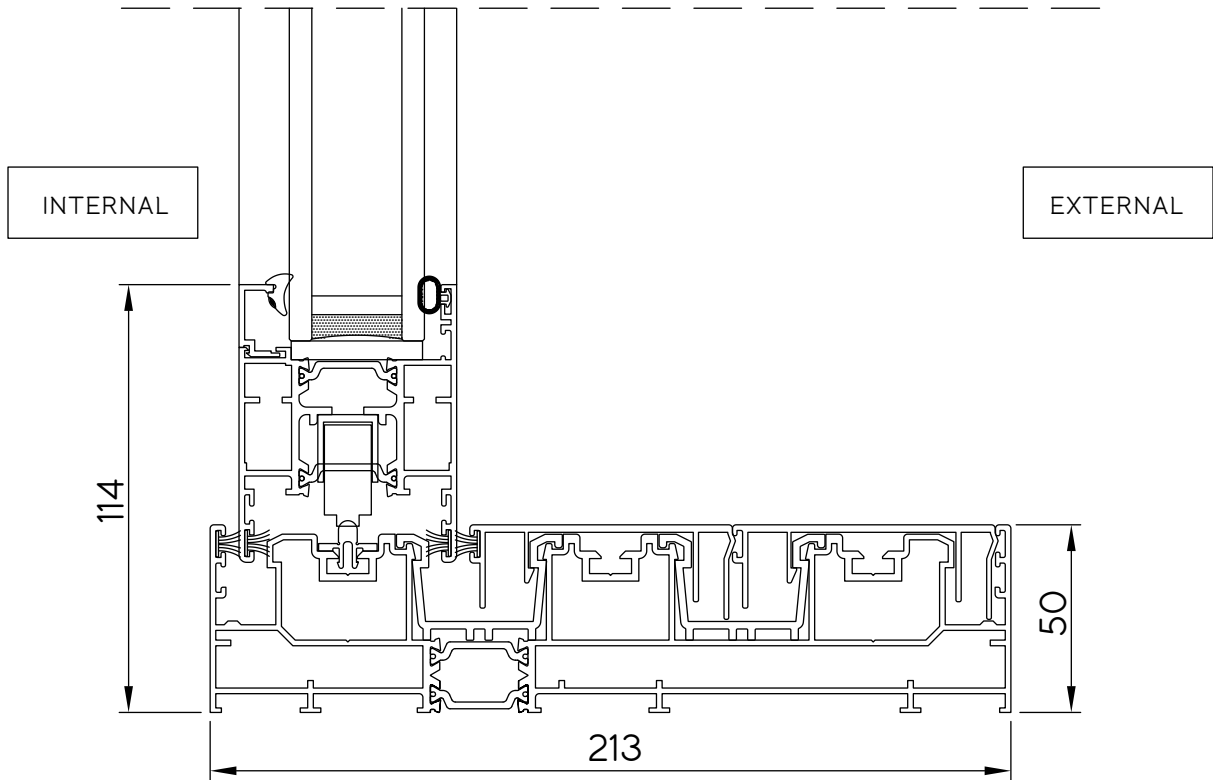



11 Triple Frame - Locking Jamb Detail

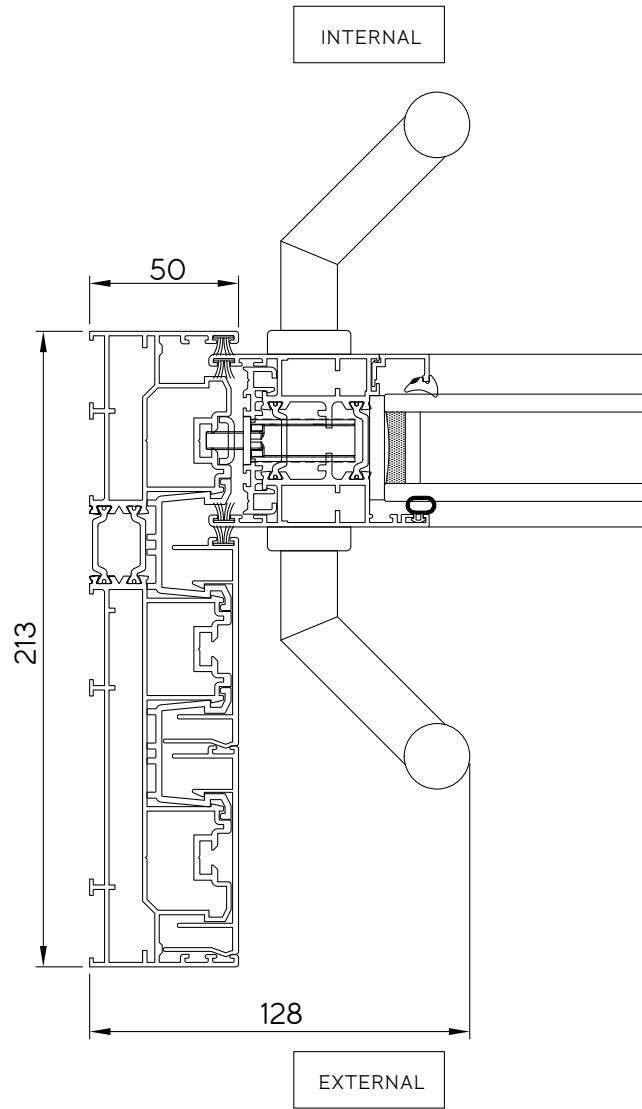



12 Triple Frame - Fixed Jamb Detail

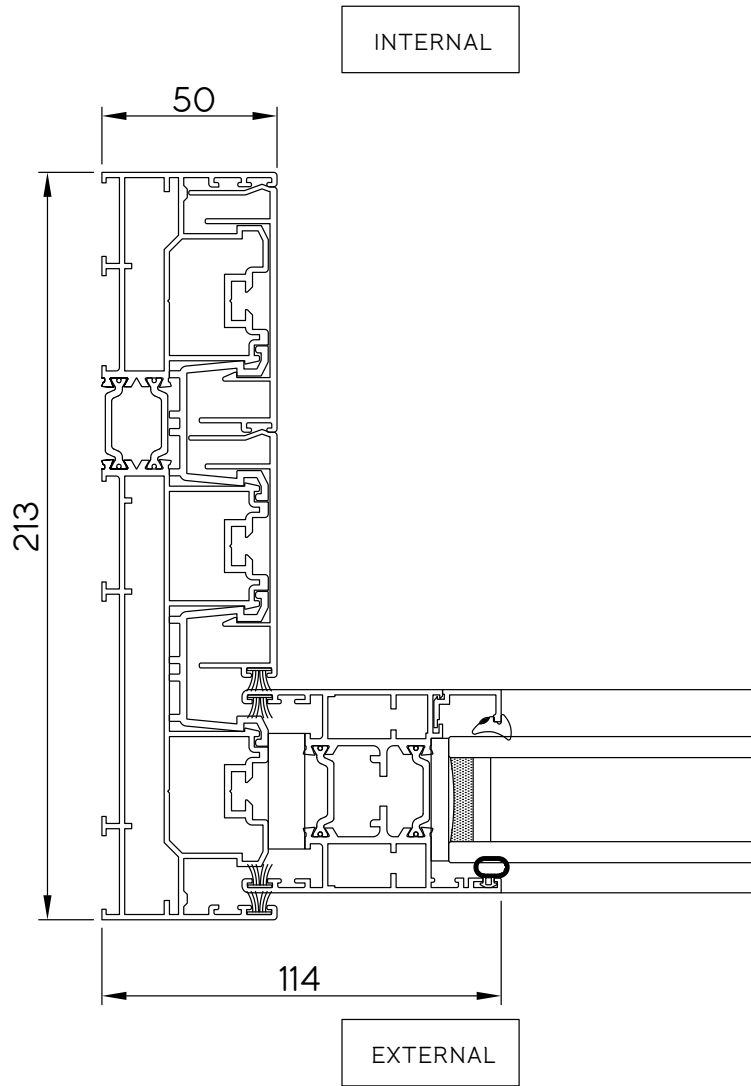

13 Triple Frame - Drainage Detail

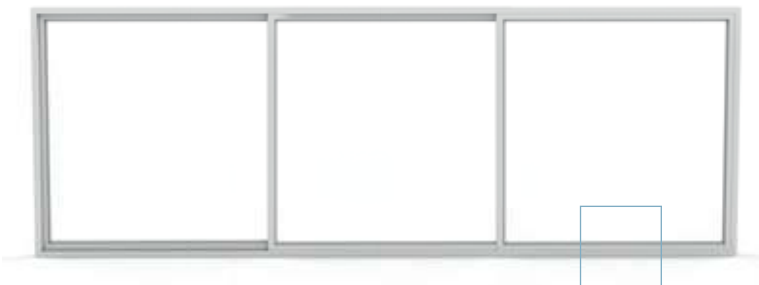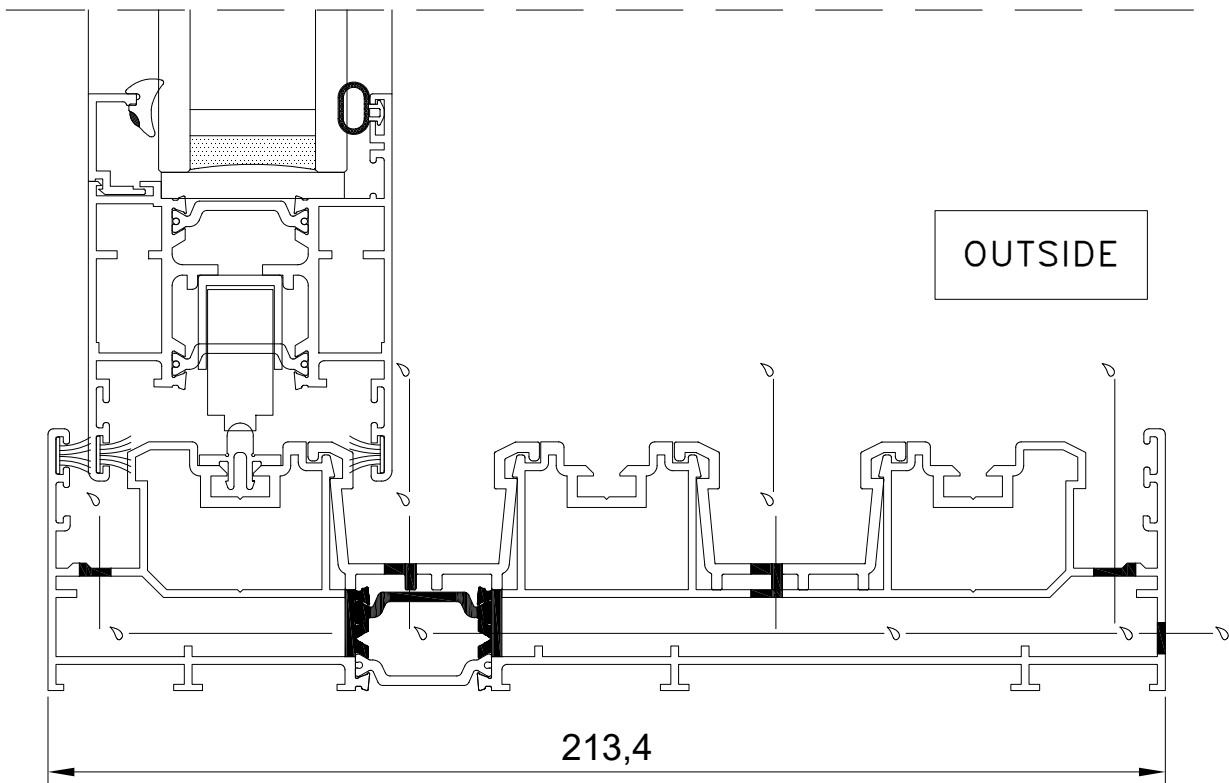


14 Drip Bar Detail (optional extra)

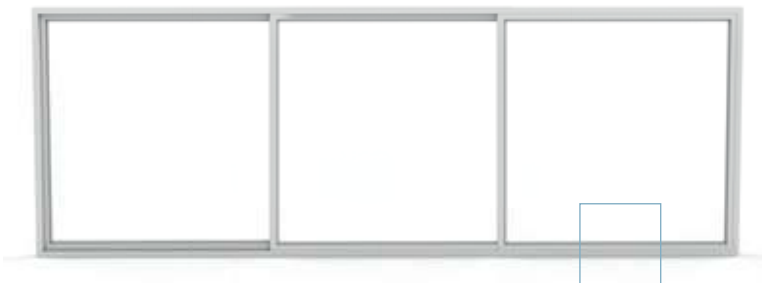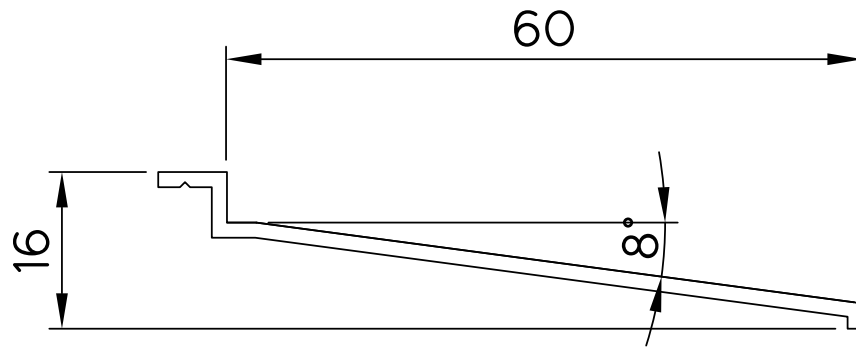




15 225mm Cill Detail

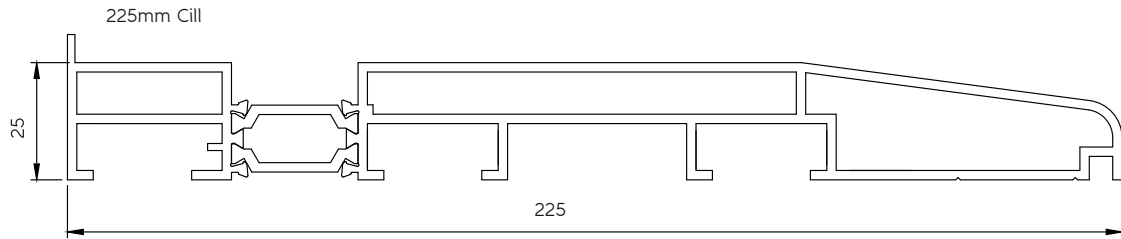


16 Glazing Details

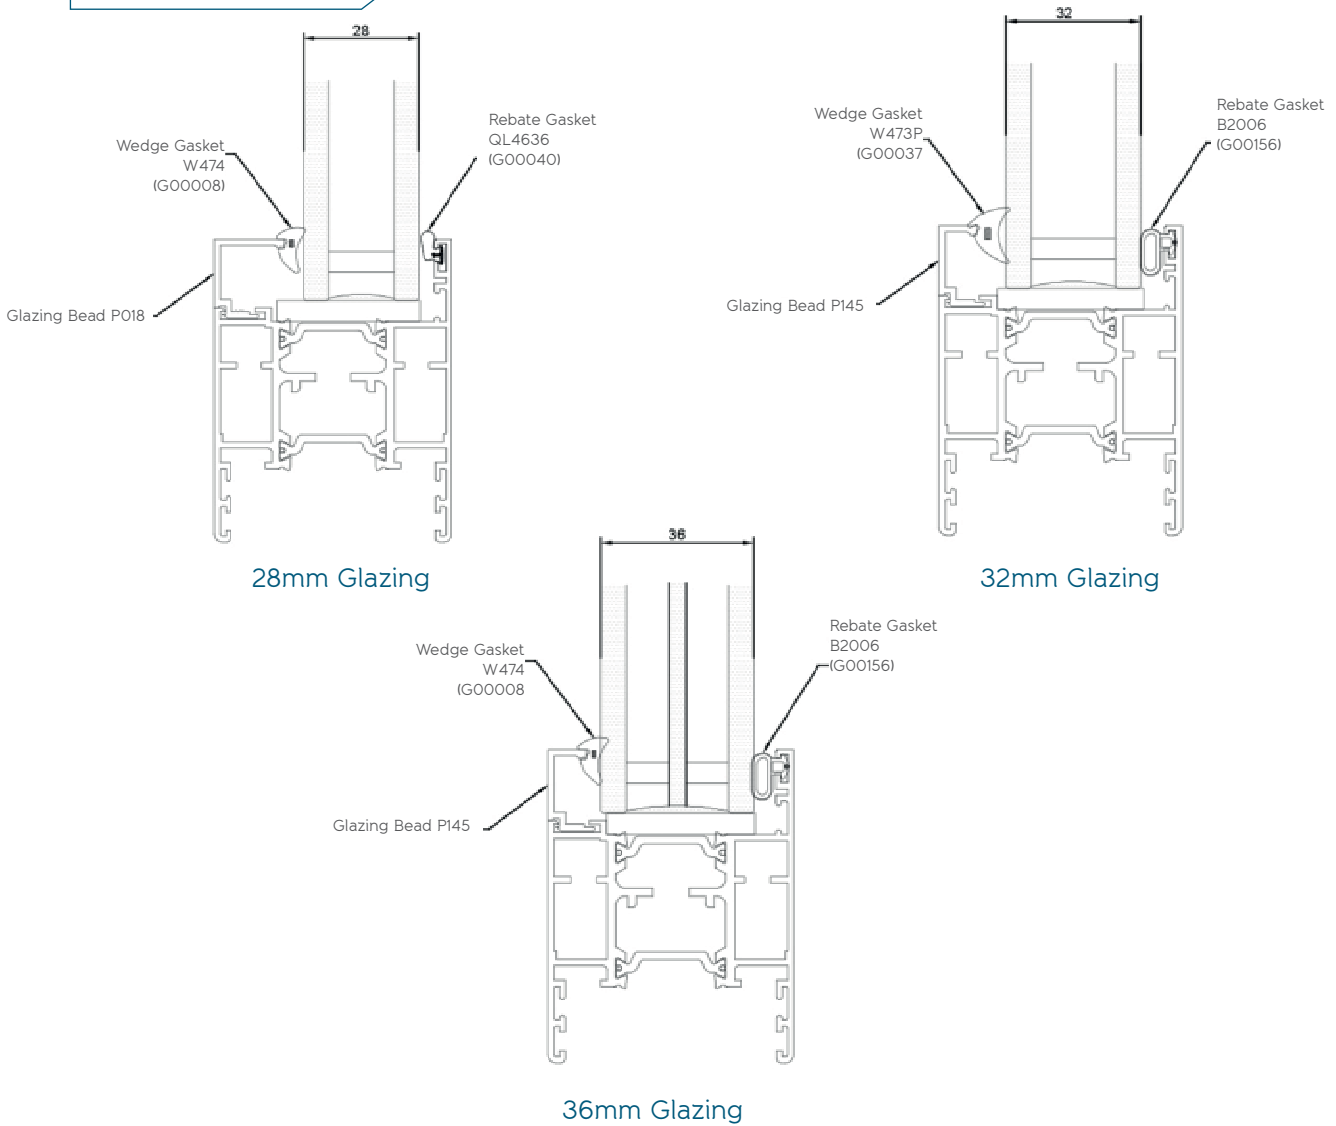

17a Frame Extender (Double Frame) Detail

The frame extender is fitted to the width of the frame.


Each fixing is approx every 600mm.

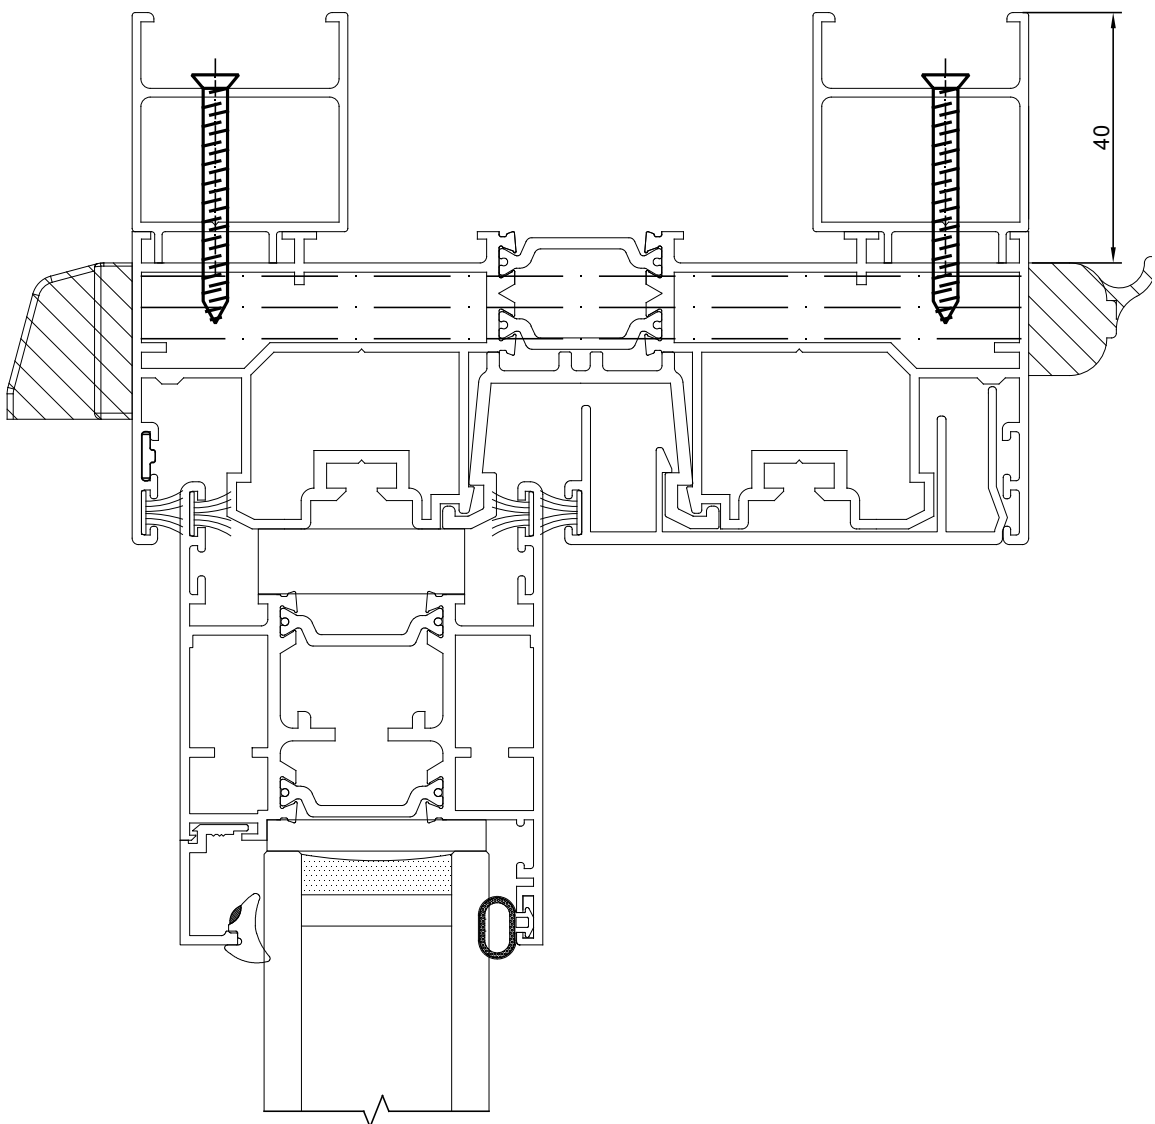


## 17b Frame Extender (Triple Frame) Detail

The frame extender is fitted to the width of the frame.




Each fixing is approx every 600mm.

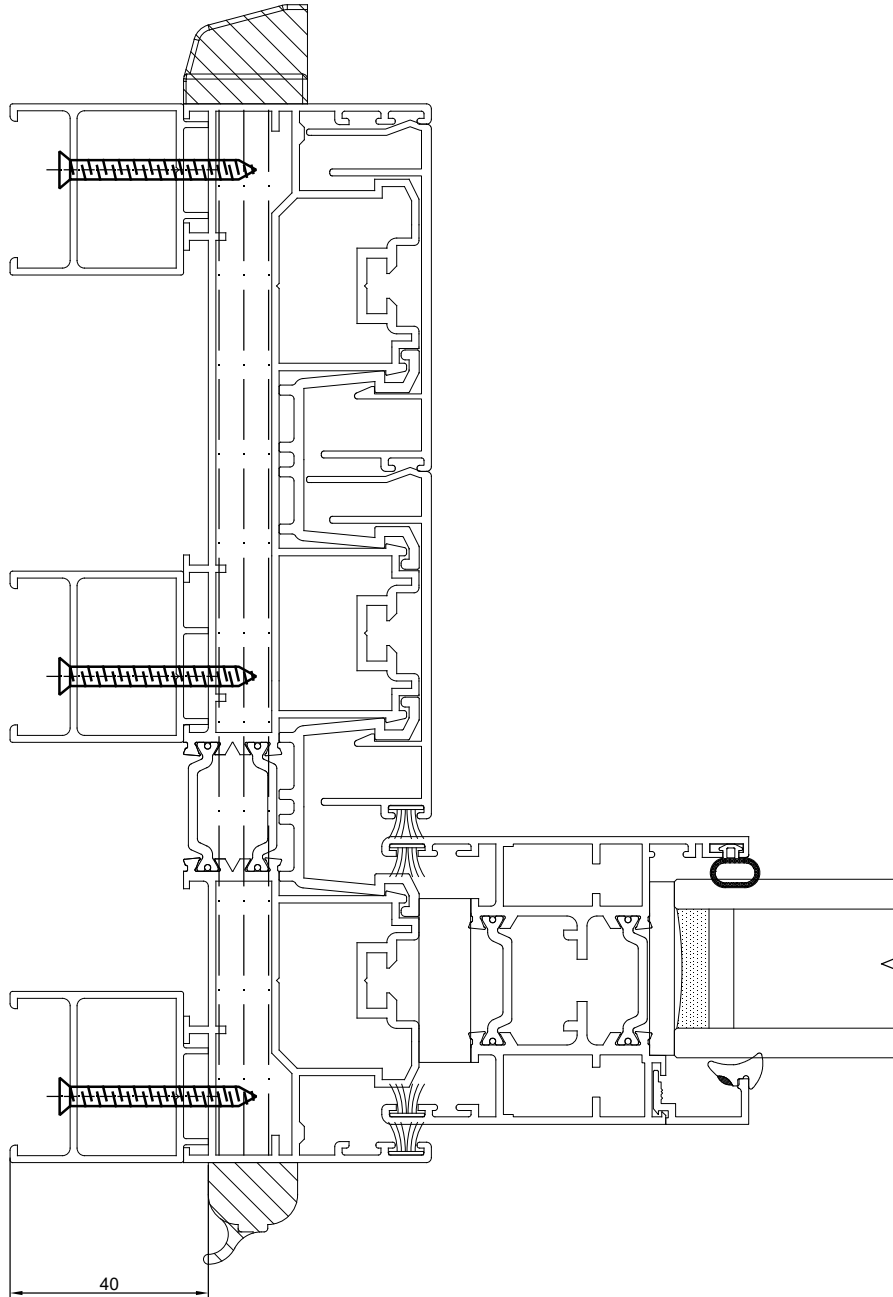

17c 35mm Frame Extender Detail (Optional Extra)

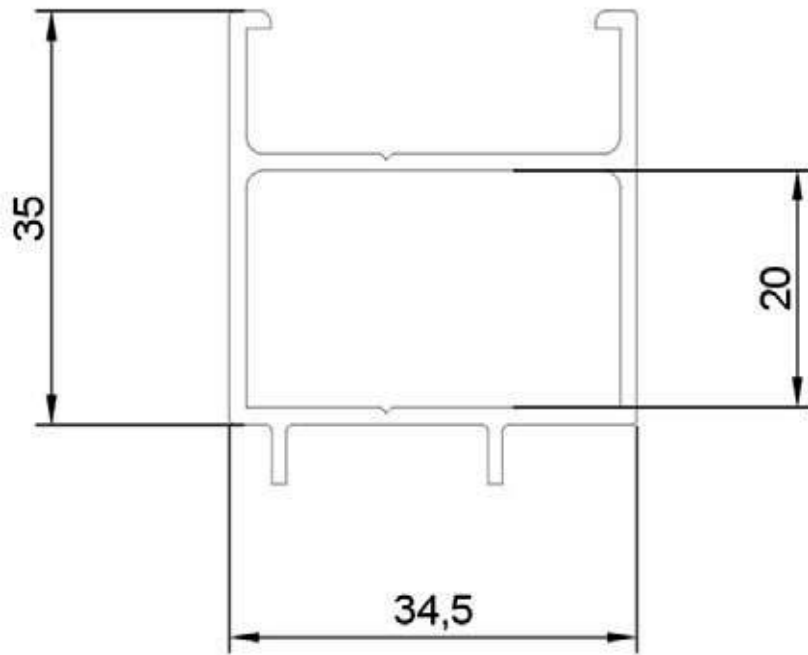

# Handles

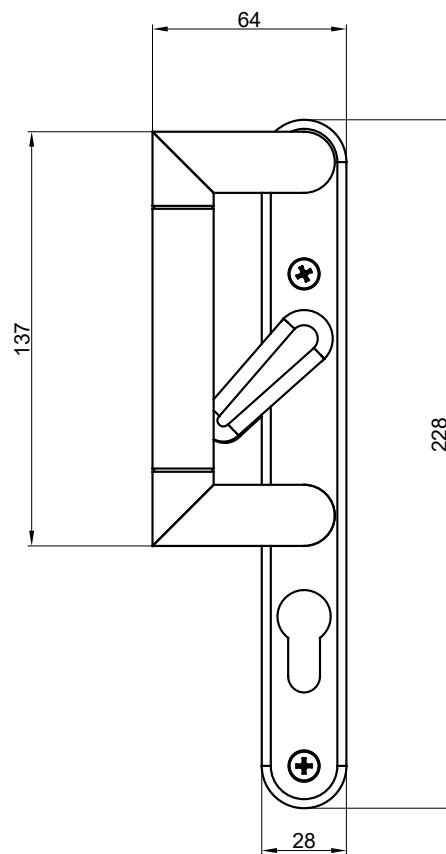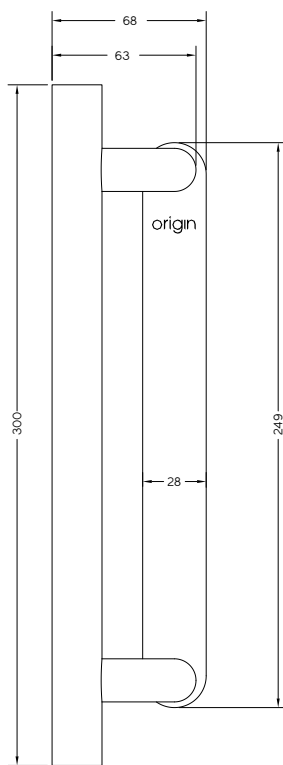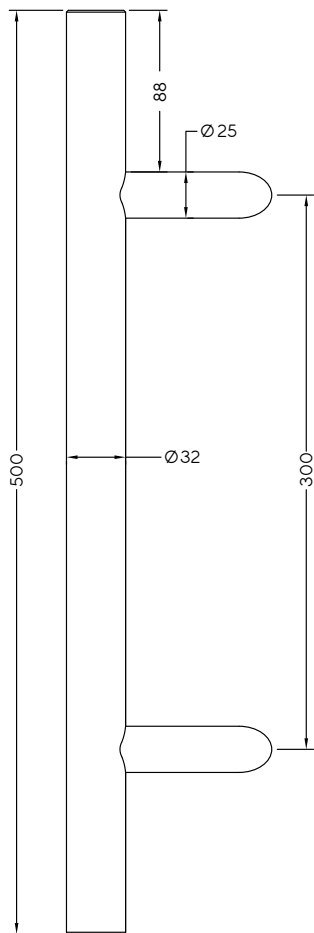

500mm offset bar handle

300mm all-in-one bar handle

Patio D-handle


The OXXO and OXXXXO configurations are only available with the 500mm Offset Bar Handle

# Gaskets

---


Wedge Gasket

W473P (G00037)




Rebate Gasket

B2006 (G00156)



7.5mm Brush Pile

FPG (G000164)



Wedge Gasket

W474 (G00040)




Rebate Gasket

QL4636 (G00008)





9mm Brush Pile

(G00142)





# All Configurations



## 2 door configurations

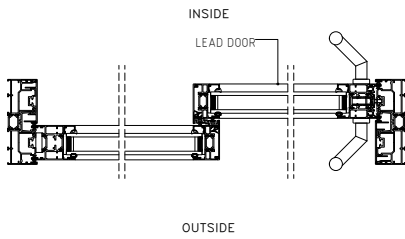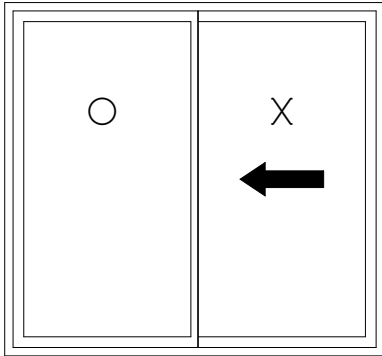



OX L (1+1 sliding left)

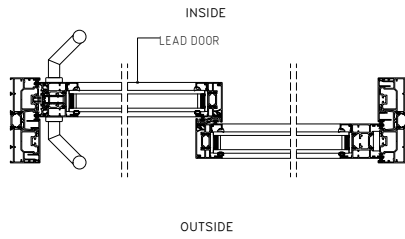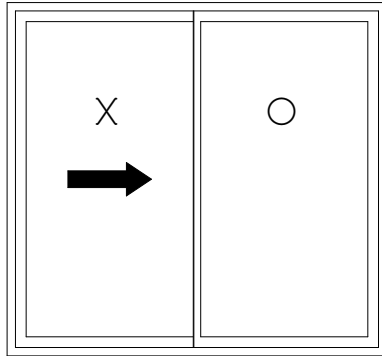

OX R (1+1 sliding right)

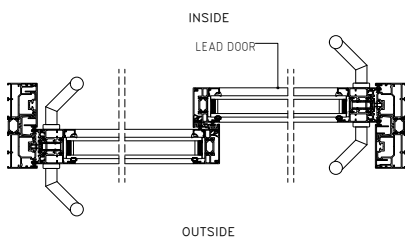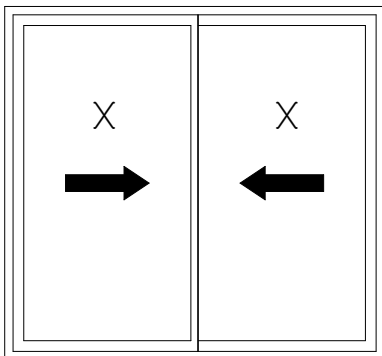



XX L (2+0 sliding left)

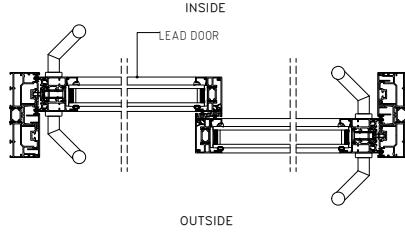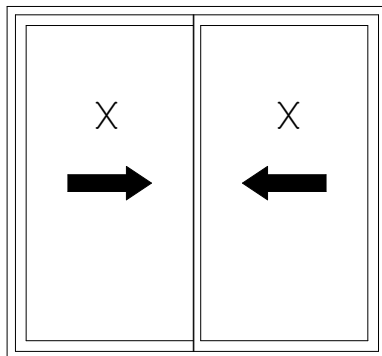



XX R (2+0 sliding right)

# All Configurations



## 3 door configurations

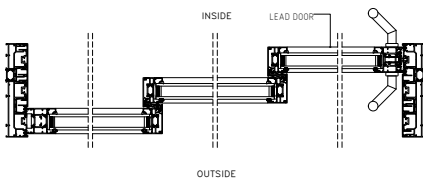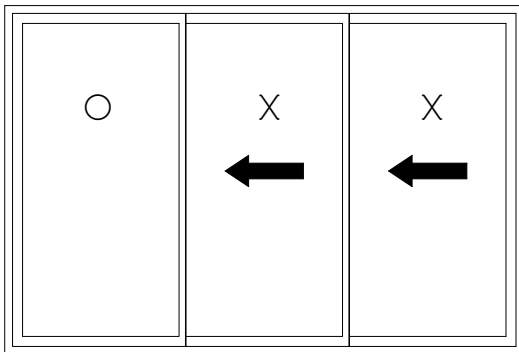



OXX L (2+1 sliding left)

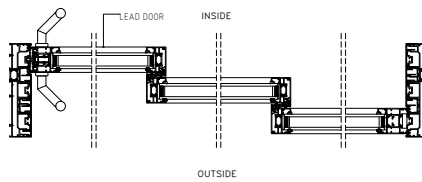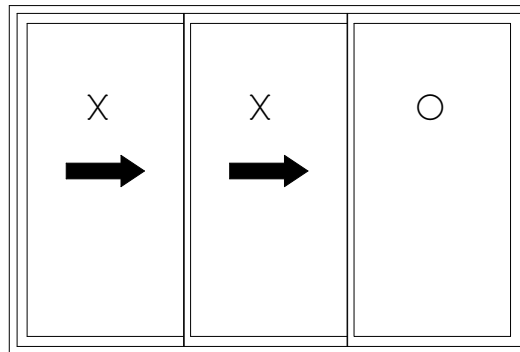

XXO R (2+1 sliding right)

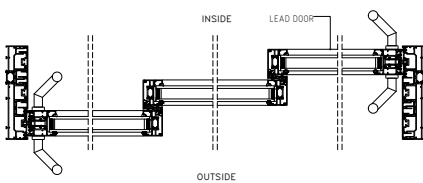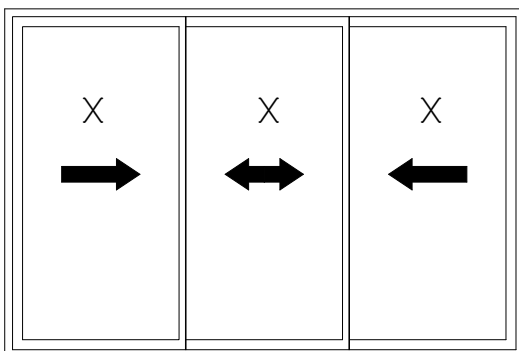

XXX L (3+0 sliding left)



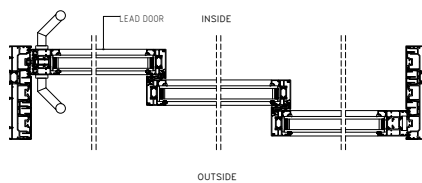
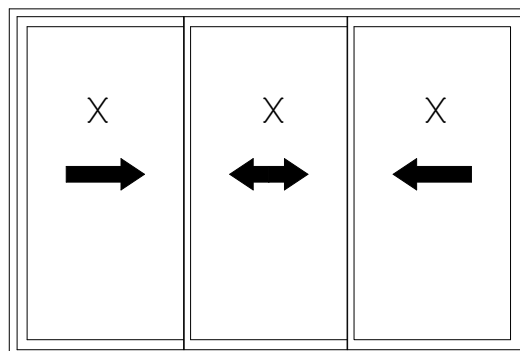


XXX R (3+0 sliding right)



# All Configurations





## 4 door configurations

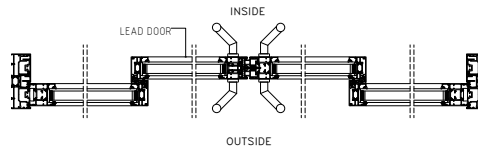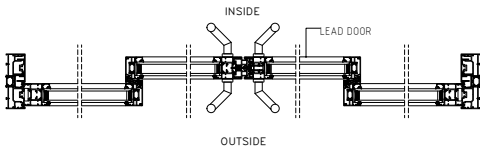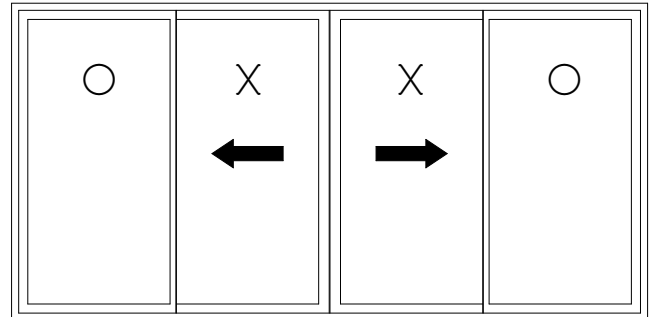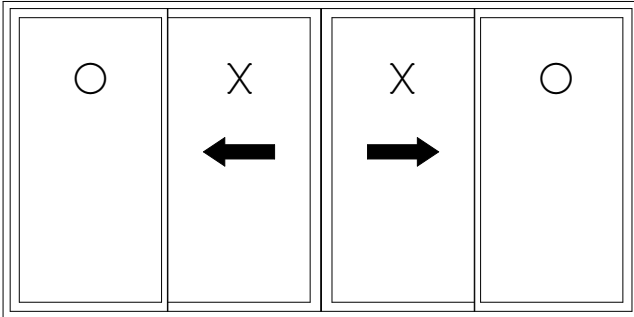

OXXO L (2+2 sliding left)

OXXO R (2+2 sliding right)

## 6 door configurations

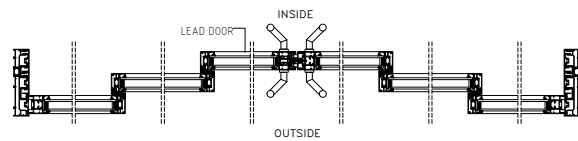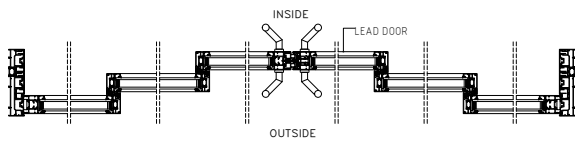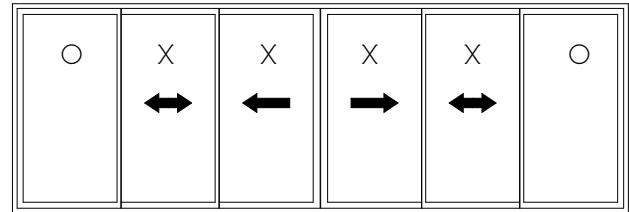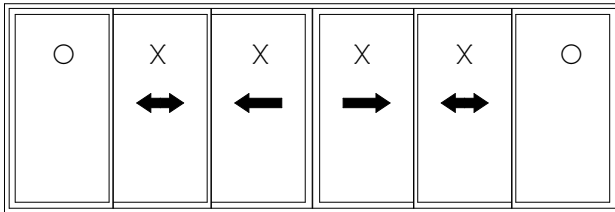


OXXXXO L (4+2 sliding left)

OXXXXO R (4+2 sliding right)

# Installation Guide

## Components box

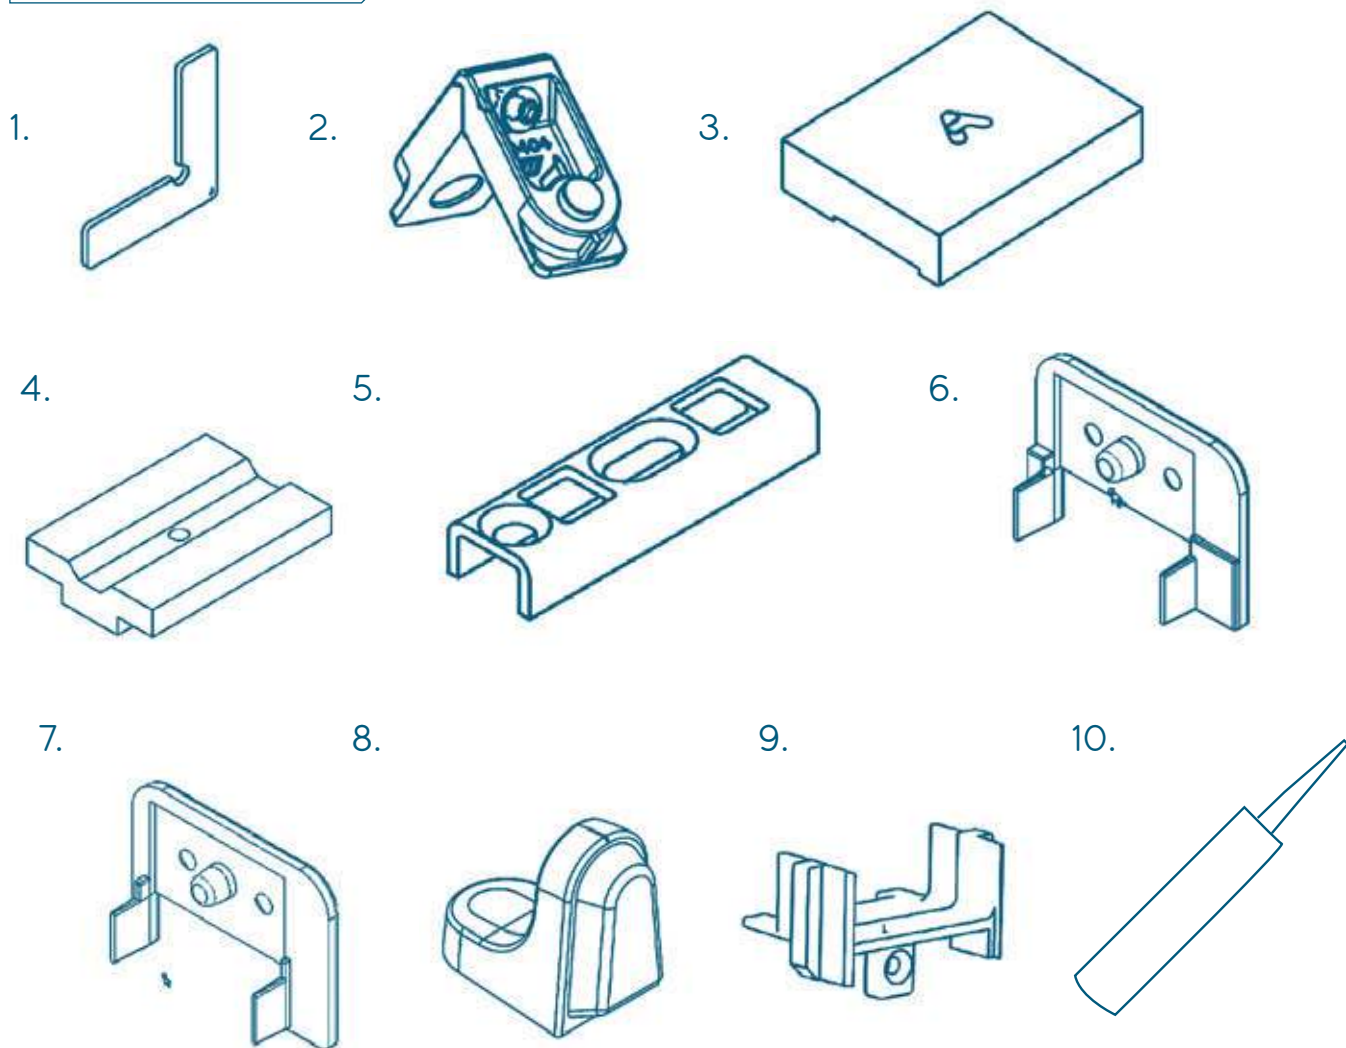

Also included: Handles, Appropriate Glazing Gasket, Cylinder/ keys, Fixed sash fixings (4.8 x 80mm)

## Contents

- |                        |                             |   |
|------------------------|-----------------------------|---|
| ▶ 1. Alignment Chevron | ▶ 5. Shoot Bolt Keep        | ▶ 8. Door Stop  |
| ▶ 2. Frame Cleat       | ▶ 6. End Cap (OS-44/ OS-77) | ▶ 9. Slave Lockstile End Cap<br>For 4 & 6 door Slider |
| ▶ 3. Fixed Sash Space  | ▶ 7. End Cap (OS-29)        | ▶ 10. Interlock Silicon<br>(OS-29/ OS-44)             |
| ▶ 4. Anti-Lift Block   |                             |   |

## Preparation

1. Check all components have been delivered (see components box items on page 48)
2. Check opening sizes are correct to ordered size
3. Check the substrate is plumb, level and flat/ replace any damaged or missing DPC under the threshold/ cill
4. The cill/ track must be supported across its depth to prevent twisting when the weight of the door is applied (Metal Packers are available for bottom track)

Measure and check the aperture width and height

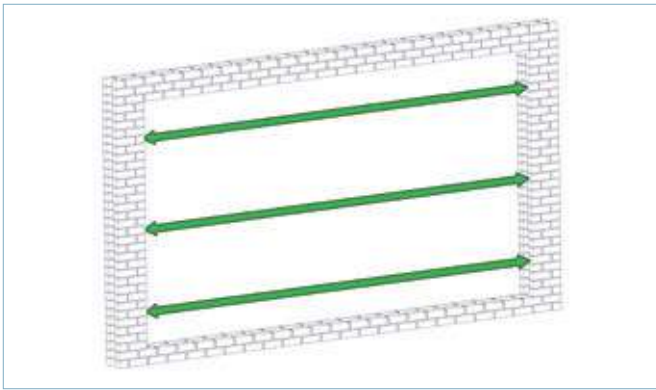


FIG 1

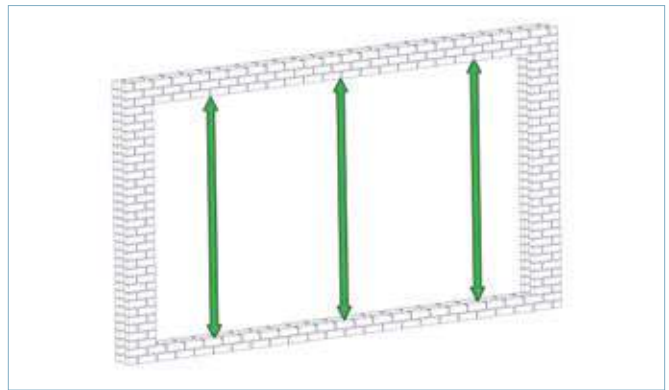


FIG 2

Level the threshold in both directions, packing every 500mm apart for the length of the opening.

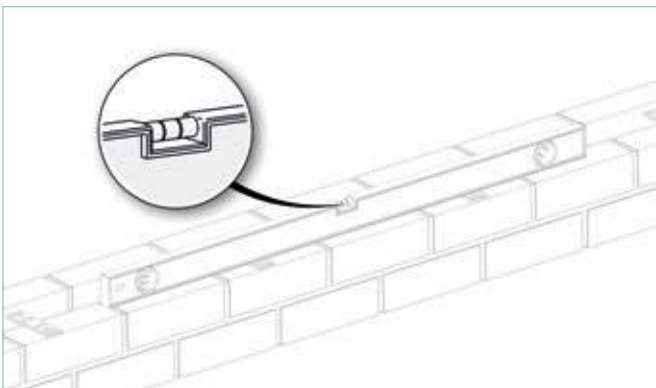


FIG 3

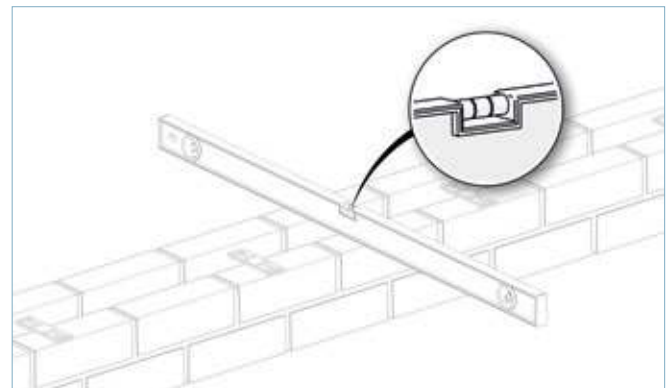


FIG 4

## Frame Install

1. Lay out the frame components (as labelled) in your work area
2. Insert the alignment chevrons. Location – directly beneath brush gasket position (FIG 6)
3. Apply sealant to the ends of the bottom track and attach the jambs, completely filling the bottom chambers where the water sits and around the edges
4. Align corners using the chevrons and then tighten using the 4mm allen key, making sure the joint is fully together. Once the corners are fully attached, fill the cleat locating holes and screw holes with silicone (this is essential on the bottom track) (FIG 7 & 8)
5. Wipe off the excess sealant
6. Attach the head to the jambs using the same process as described in points 2-5 above

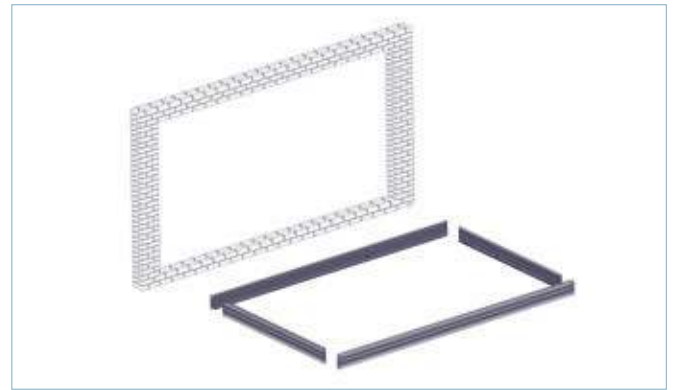


FIG 5

Lay frame profiles in front of aperture, being careful not to scratch the powder coat.

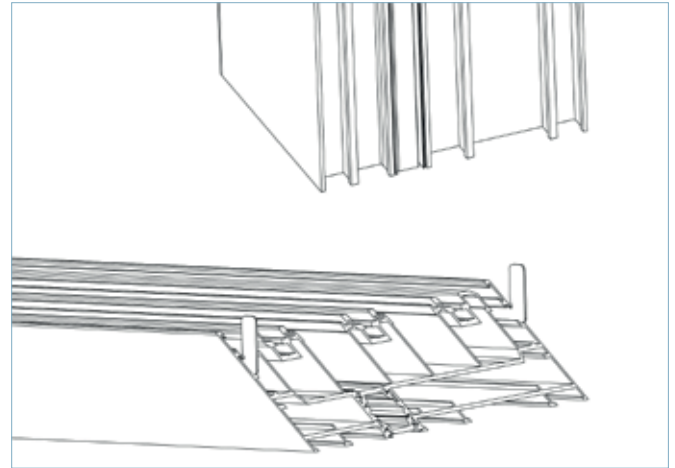


FIG 6

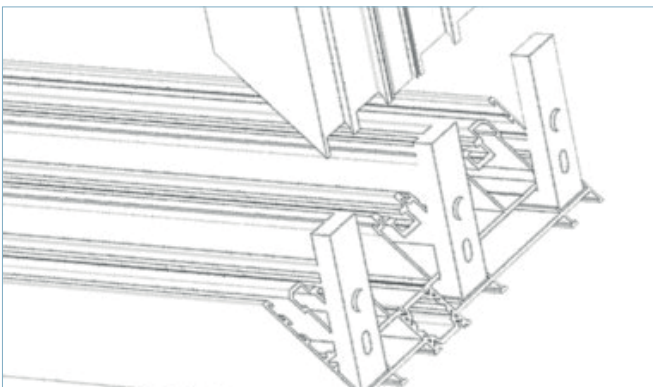


FIG 7

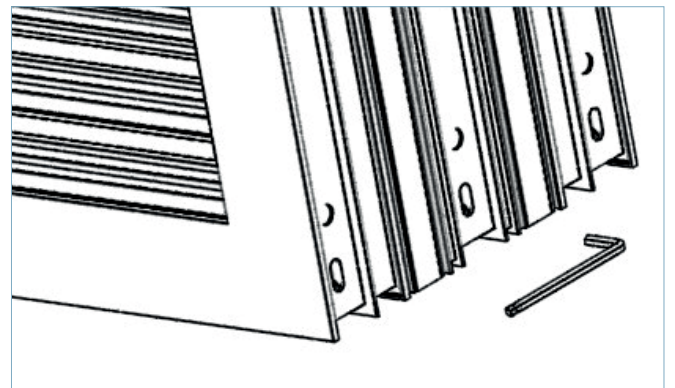


FIG 8

## Frame Install

1. Ensure that the bottom track/ cill is set flat and level and is supported along the whole length, making sure that the packing points are no less than 500mm apart
2. If using a drip bar, ensure that when fitted, all pre-drilled holes are filled with silicone before being fixed into position with the screws supplied (FIG 9)

A consistent bead of silicone is required between the drip bar and the track to ensure a complete seal

3. Offer the frame into the opening. Pack down above the top 2 corners to hold the frame in place (FIG 10 & 11)  
Check bottom track for level and make adjustments if necessary
4. Jambs must be plumb and straight – pack as necessary when fixing to avoid bowing or twisting (FIG 12 – 15)
5. Using suitable frame fixings, secure the bottom track and both jambs into position  
**NB:** All fixings through the bottom track must be filled with an all-weather sealant before fixing
6. Check the frame is square and adjust if required

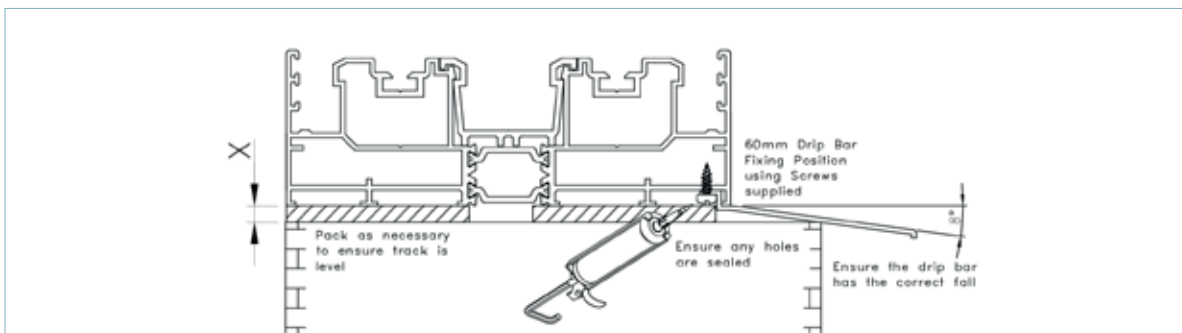


FIG 9



FIG 10

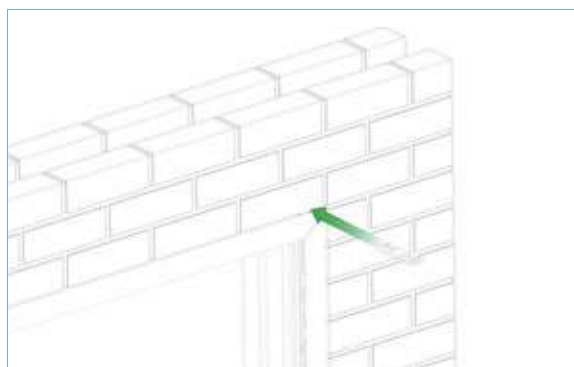


FIG 11 Insert packers above both jambs

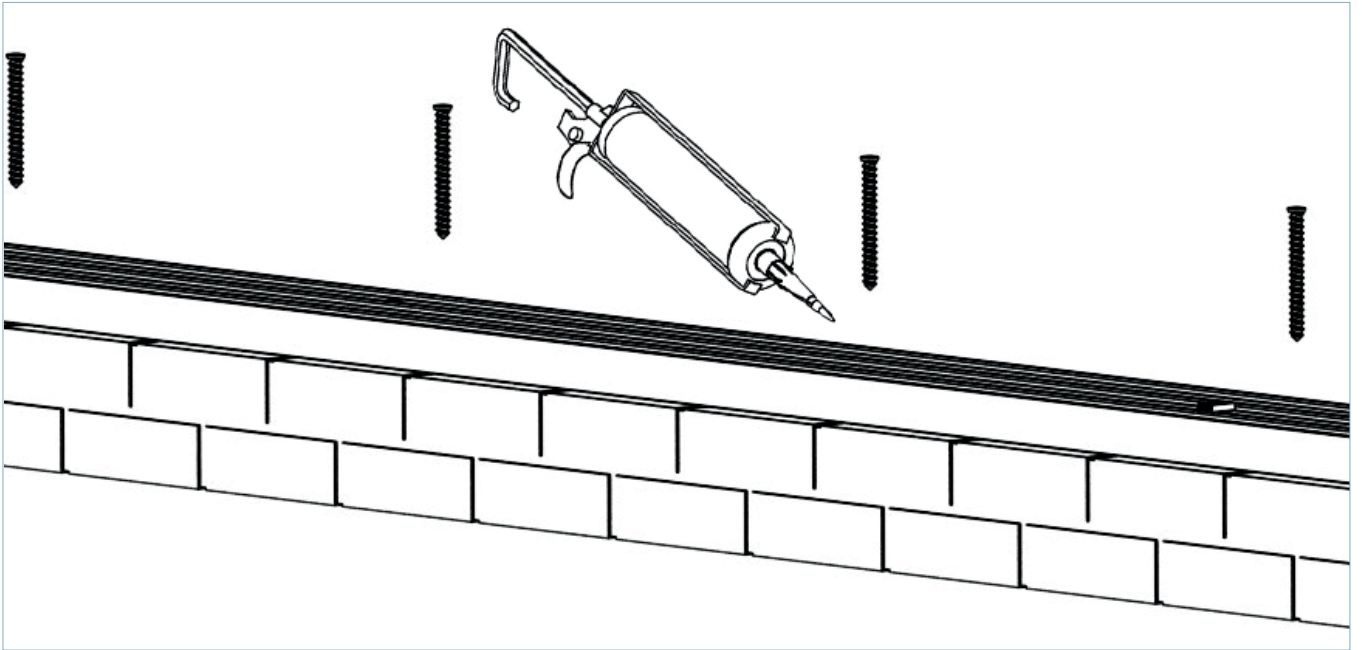


FIG 12

All holes will need sealing prior to the screws being installed.

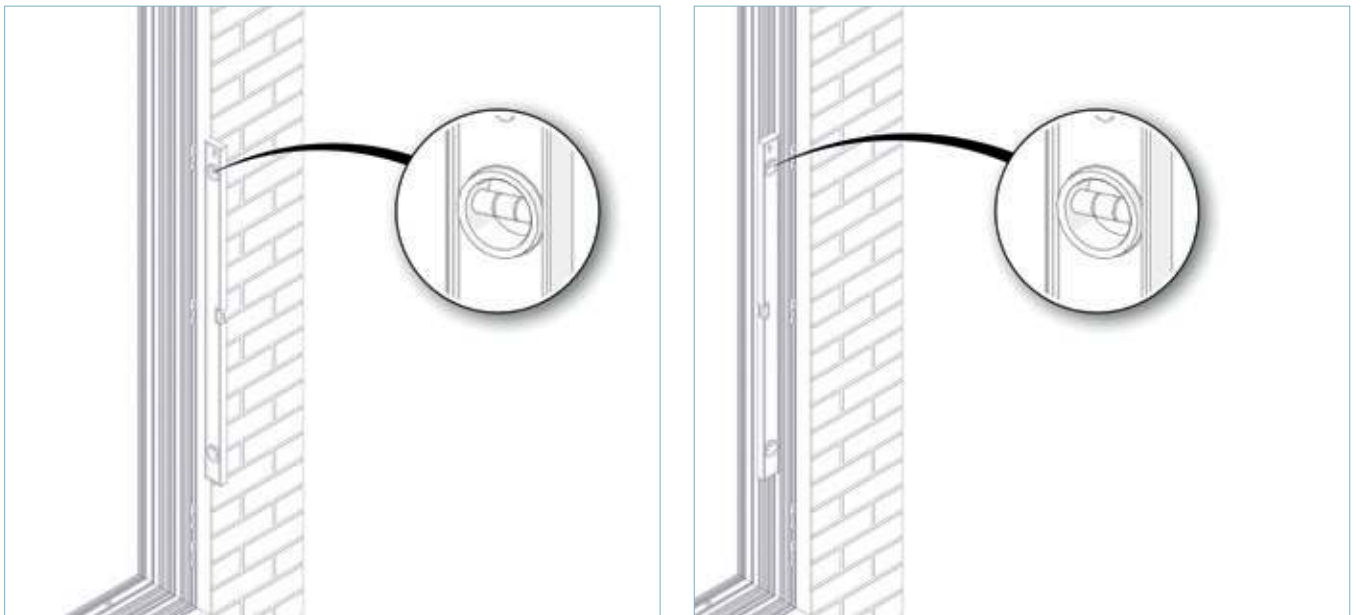


FIG 13

Level out jambs in both directions

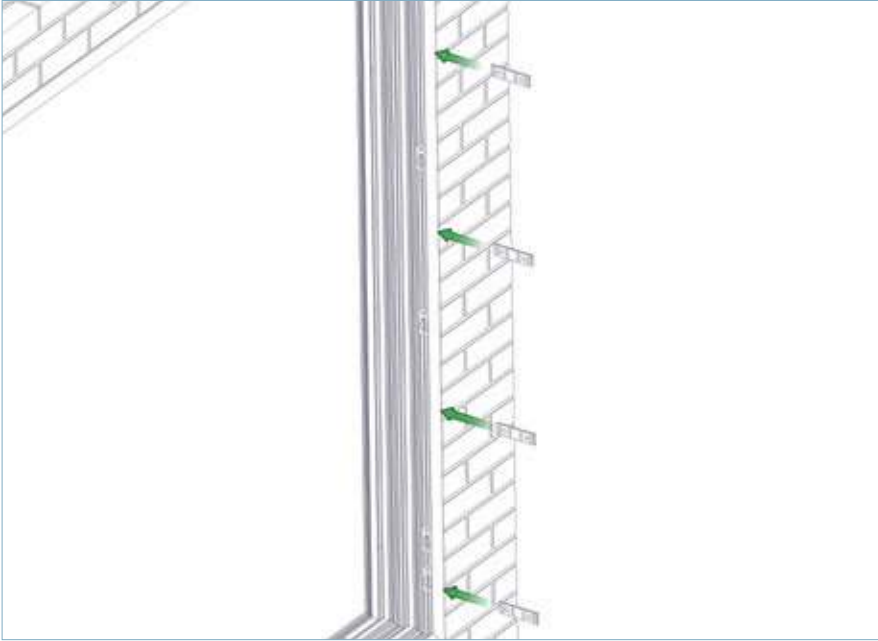


FIG 14

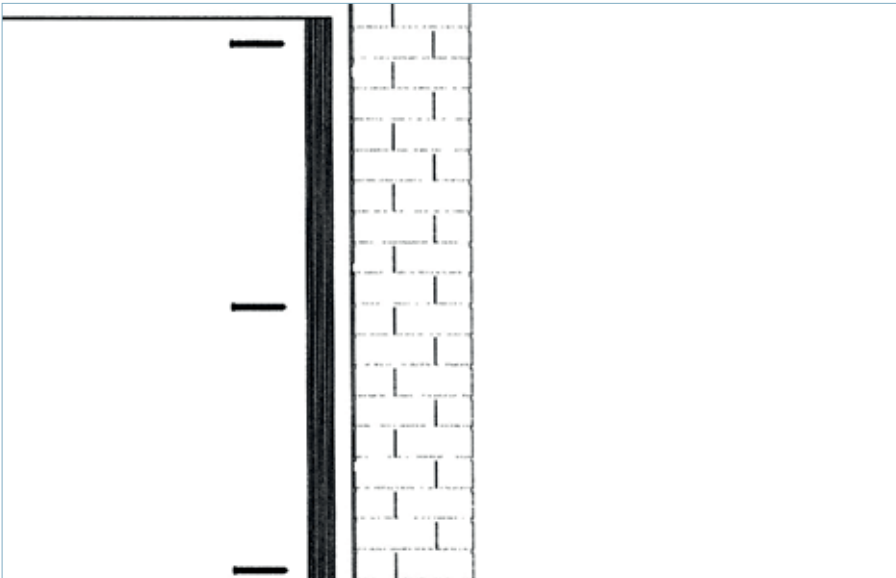


FIG 15

## Sash Install

1. If having a fixed sash, ensure the supplied sash packers are installed prior to installing the sashes

Fixing blocks should be spaced evenly around the frame at approx 500mm apart and screwed into the frame where the sash will sit

2. Insert the sash into the top track as far as possible (FIG 16)
  - b. Swing the bottom in and lower, so that the wheels of the roller engage on to its runner (FIG 17)

3. Repeat for all sashes

**NB:** *It may be necessary to lift the top track slightly to allow the bottom of the sashes to cross the runner*

4. If applicable, locate the fixed sash into place and secure using the screws provided

The sash should be lifted into position where there are no fixing blocks, then slid/ lifted into place. Fix using 4.8 x 80m screws provided. Fix through the polyamide as close to the fixing blocks as possible. When doing this, check the level of the sash on the interlocker

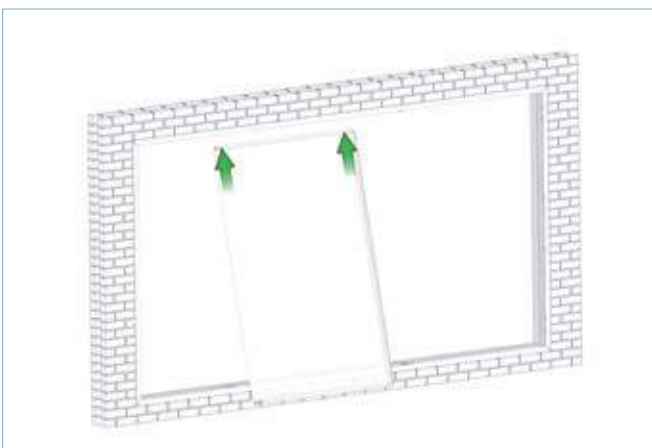


FIG 16

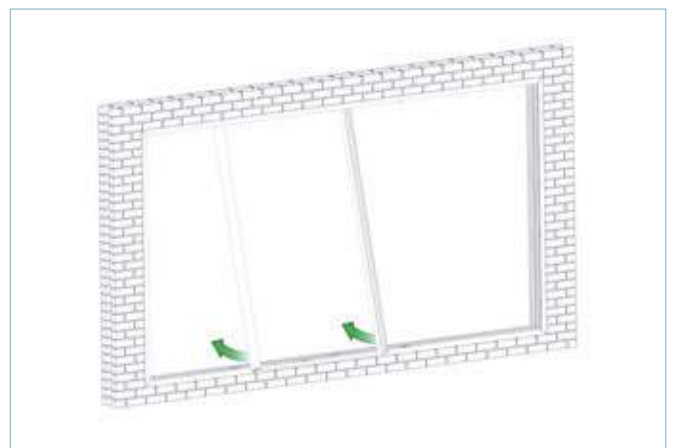


FIG 17



5. Ensure all sashes are running smoothly
6. Ensure that the sashes are level and run smoothly on the track.  
Ensure that the sashes are plumb at the meeting stiles and check that the interlocks engage. Make sure that the locking sash locks correctly when in the closed position
7. The sash can be levelled by adjusting the roller using a Hex 5 or PH2 long screwdriver depending on roller carriage used. The roller adjustment can be located at the bottom side of the sash (interlock side) (FIG 18)
8. The top track can now be fully secured. Care should be taken to ensure it is not bowed or twisted and is level along the entire length (FIG 19)

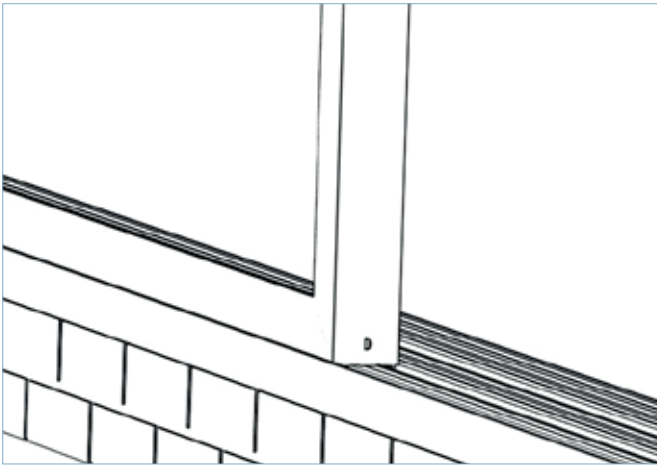


FIG 18

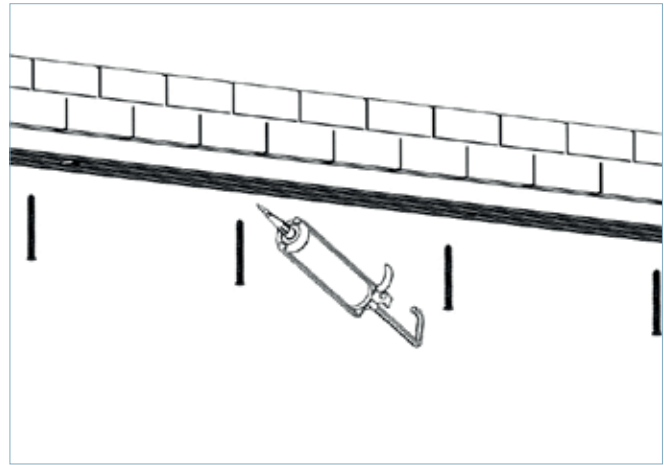


FIG 19

## Glazing

1. Start with the outside sash and work inwards
2. 4mm glazing packers should be positioned directly above each roller
3. Secure a 4mm packer in the glazing chamber and install the glazing bead on the side of the sash behind the adjoining sash interlocker

Install the top and bottom beads first, then the sides. Glaze from the outside sash to inside. Glaze, bond (if required) and wedge before moving to the inner sashes

If installing an OS-44 or OS-29, the glass should be bonded to the interlock using the supplied bonding agent. This should be a continuous bead, the full length of the interlock

4. Lift glass into position. Pack appropriately, making sure the sash remains square  
For the OS-44 or OS-29, make sure not to pack too tightly, forcing against the interlock, to avoid any twisting, as this can result in the interlocks clashing
5. Insert a short length of wedge gasket into the previously installed bead to make sure it remains in position
6. Install the remaining beads and insert the wedge gasket along all four sides
7. Repeat the steps above until all glass units have been installed
8. For the OS-44 or OS-29, ensure that the interlock remains square and is not twisted after glazing to avoid interlocks clashing

Use a straight edge on the interlock to ensure that this remains straight after installing the wedge gasket

## Installation Guide

1. Insert cover trims into jamb and track (if applicable)
2. Insert end caps into prepped holes on the interlock (inside and out) and install the supplied screws. The small brush strip fits to the back of the cap before fixing (FIG 20)

End cap fixings holes need to be pre-drilled for OS-29

3. For 4 & 6 pane doors, end caps are fitted top and bottom of the slave door to close the gap where the sliding doors meet (FIG 21)
4. Insert the shoot bolt keeps into the top and bottom track and insert the provided screw into the slotted hole. Check the sash locks into place smoothly and the side to side movement is kept to a minimum. Once adjustment is complete, install the remaining screws (FIG 22)
5. With the doors closed, mark the track (non-permanent mark) 150mm in from each side of each sash. Slide open the door and fix the anti-lift blocks into position, in line with the previously made marks
6. Open the locking sash to the fully open position (being careful to allow space for the operators fingers between the handle and interlock). Locate the door stops on the bottom and top of the sash and fix into place using the supplied screws (FIG 23)

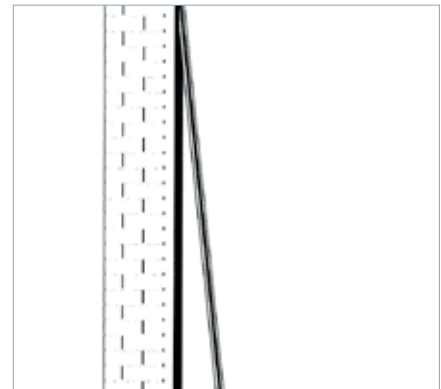


FIG 20

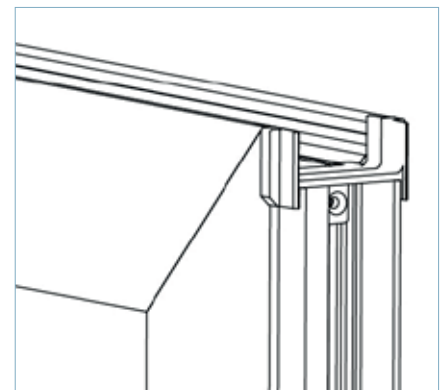


FIG 21

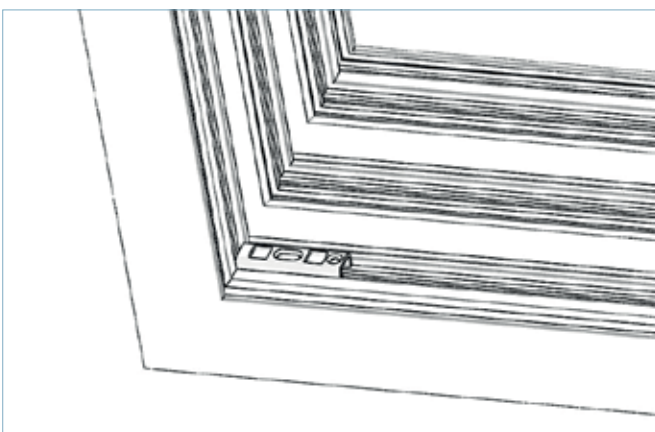


FIG 22

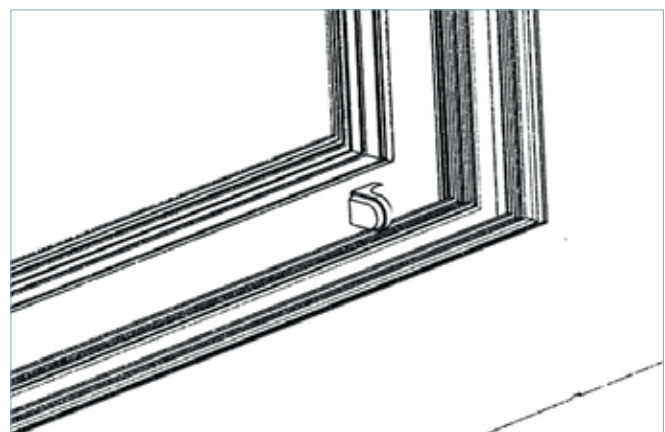


FIG 23

## Components List

<b>Component</b>	<b>Code</b>
Alignment Chevron	C00135
Frame Cleat	X209
Fixed Sash Spacer	C00514
Anti-Lift Block	X238
Shoot Bolt Keep	L191
End Cap (OS-44/ OS-77)	X229
End Cap (OS-29)	C01561
Door Stop	X212
Slave Lockstile End Cap For 4 & 6 door Sliders	X115
Interlock Silicon (OS-29/ OS-44)	C00546
Offset bar handle	H045
300mm All-in-one handle	H113

# Accreditations...

At Origin, we pride ourselves on providing best quality products backed by best levels of service and efficiency. Put simply, our aim is to continuously learn, evolve and improve.

We are well known for having rigorously high standards in everything that we do. We're also known for innovation, but we never want to settle: if there's a way that we could do something better, we will find it.

This ethos has been instilled throughout Origin. Whether it's a process, product offering or even the company's sustainability, we have created a culture that encourages continuous improvement.

To demonstrate our commitment and as a way of measuring our performance, we work towards gaining certain prestigious accreditations. Our achievements show a strong moral and ethical intent in how we operate and how we try to do things the best way, not because we are told to do so, but because we think it is the right thing to do.

## ISO 9001 – Quality Management...

ISO 9001 is an international standard that assesses a company's quality management system. Having first achieved it in 2013, the fact that we still are certified means that we have a track record of consistently providing products and services that meet both customer and regulatory requirements.

It's something that we take very seriously and its influence is integrated into every process.

Key areas of this include:

Product quality – To ensure a product's overall manufacture is flawless, we have checks in place to guarantee you the best quality. A few examples are:

- Supply chain – an inspection at the point of delivery and before going into manufacturing. If anything is spotted, it's documented and raised with the supplier.
- Production – there are quality checks at every station, not only to look over the previous person's work, but to review the quality of the overall build.
- Equipment – a robust maintenance schedule for machinery and equipment ensures consistency.
- Pre-delivery – before it is packaged and loaded ready for delivery, there's another thorough check to ensure nothing's happened whilst being moved from station to station.
- Feedback – as part of our mission to always innovate, whether it's from internal or external stakeholders, feedback is imperative. We are very proactive at bringing this type of information back into the business and learning, as it gives us an opportunity to improve.

## Accreditations

- Training and development for our employees – meaning we're better at understanding the good, the bad, and what we can do better.



FS 584084

## ISO 45001 – Health & Safety Management...

Whether it's through improving homes with our products, or in our workplace, people are at the heart of everything that we do at Origin, so we are very proud to have achieved a triple badge accreditation when we received our latest accolade - ISO 45001.

ISO 45001 recognises our commitment to employee safety, and reduces workplace risks to create a better, safer working condition. We have spent time reviewing all the activities that go on within the offices, manufacturing centres and warehouses, and have created a full risk log which will link up to our current risk assessments. These are fed back so they can be actioned to be rectified or developed into an improved method of operating.

This means that you can buy from our range safe in the knowledge that we are minimising risks as much as we can for optimum safety.



OHS711491

## ISO 14001 – Environmental Management...

Now more than ever, we need to be aware of the impact our operations may have on our environment; the legal obligations we must adhere to, and ensuring we are doing things the right way.

The internationally renowned ISO 14001 accreditation measures the environmental management system that we have in place. It's a subject that's very close to our hearts, which is why working towards this standard was an easy decision.

We care about the resources we use for our products – where they come from and where they end up. To add to this, we aim to be zero waste to landfill and have already put into place many positive changes to make this happen. We want our customers to buy from us with a clear conscience and feel that ISO 14001 can prove that Origin is taking responsibility, acting ethically, legally and exercising best practice in all that we do. Our environmental management system covers:

- Waste management and energy targets – to reduce our consumption and impact on the environment. Helpful hints, tips and reminders are prompted to all staff regularly, so that they can join us in our goal and see how small changes to their work practices can have a big impact.
- Product design and lifecycle – recyclability and sustainability are a design priority for us.
- Supply chain – choosing suppliers that are aligned with our ethos and vision. This is applicable not only when bringing on new suppliers, but also working with existing ones to better their carbon footprint – whether that's minimising packaging, reusing or even our drivers picking up the materials on their routes, rather than a supplier sending their own fleet, we are constantly reviewing how we can improve.



# Contact

## Accounts

---

**t** 08448 802 371 or 01494 416 895      **e** [Finance@origin-global.com](mailto:Finance@origin-global.com)

## Marketing

---

**t** 08448 802 374 or 01494 416 897      **e** [Marketing@origin-global.com](mailto:Marketing@origin-global.com)

## Sales Operations

---

**t** 0808 168 5816 or 01494 686 868      **e** [OrdersNorth@origin-global.com](mailto:OrdersNorth@origin-global.com)

**e** [OrdersSouth@origin-global.com](mailto:OrdersSouth@origin-global.com)

## Fleet and Logistics

---

**t** 08448 802 378 or 01494 416 898      **e** [Logistics@origin-global.com](mailto:Logistics@origin-global.com)

**origin**  
DOORS AND WINDOWS

Origin Global HQ, Stuart House, Castle Estate,  
Coronation Road, High Wycombe  
Buckinghamshire, HP12 3TA

**t** 0808 168 5816  
**e** [enquiry@origin-global.com](mailto:enquiry@origin-global.com)  
**w** [www.origin-global.com](http://www.origin-global.com)



THE QUEEN'S AWARDS  
FOR ENTERPRISE:  
INTERNATIONAL TRADE  
2020